



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 18022, 3/4" × 3/4" PEX HPP Elbow

High Performance Polymer PEX insert elbows. SS press sleeves sold separately.

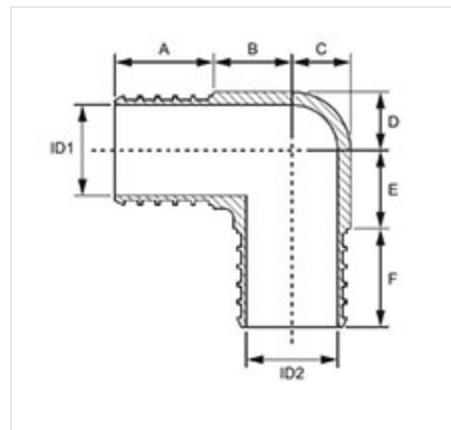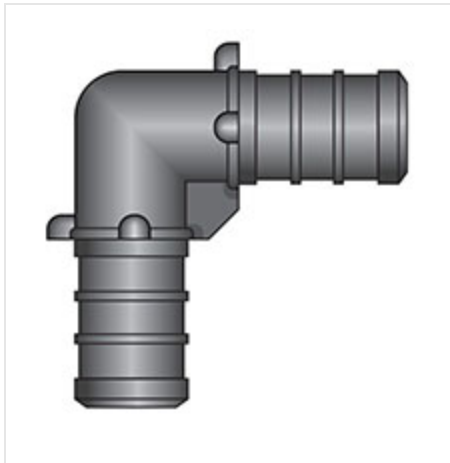

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size	3/4" × 3/4" PEX
Length L1	1.97 in 50 mm
Length L2	1.97 in 50 mm
Angle	90 °
Weight	0.009 kg 0.021 lb
Pkg Qty	25

Carton Qty	300
-------------------	-----

Unit	ea.
-------------	-----

Dimensions

A	0.71 in 18.0 mm
----------	--------------------

B	1.26 in 32 mm
----------	------------------

C	0.33 in 8.5 mm
----------	-------------------

D	0.33 in 8.5 mm
----------	-------------------

E	1.26 in 32 mm
----------	------------------

F	0.71 in 18.0 mm
----------	--------------------

ID1	0.46 in 11.7 mm
------------	--------------------

ID2	0.46 in 11.7 mm
------------	--------------------

Technical Data

Material	Modified Polyphenylsulfone
-----------------	----------------------------

Operating Temperature [Max]	82.2 °C 180 °F
------------------------------------	-------------------

Operating Pressure [Max]	6.9 bar 100 psi
---------------------------------	--------------------

Listings

Listings	cNSFus-pw
-----------------	-----------

Codes

Codes

IAPMO UPC

Standards

-

Standards

ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation

-

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

-

Related Documents

HeatLink Limited Plumbing Warranty