



**HeatLink Group Inc.**

**Head Office:**

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: [info@heatlink.com](mailto:info@heatlink.com)

Purchase Orders: [purchaseorder@heatlink.com](mailto:purchaseorder@heatlink.com)

Quotation Requests: [quotes@heatlink.com](mailto:quotes@heatlink.com)

**Item # 18028, 1" × 1" PEX HPP Elbow**

High Performance Polymer PEX insert elbows. SS press sleeves sold separately.

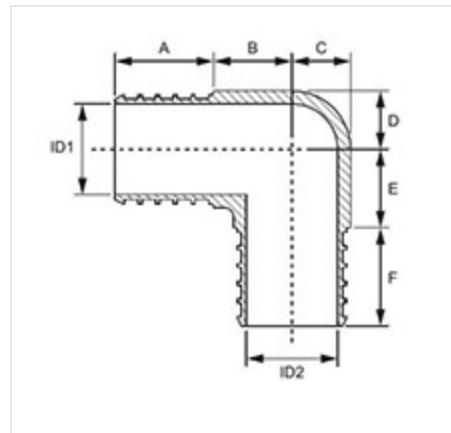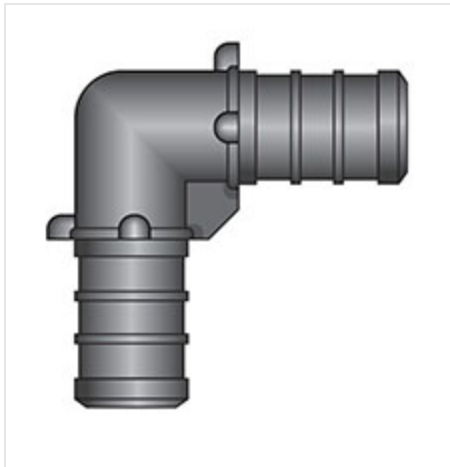

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

|                  |                      |
|------------------|----------------------|
| <b>Size</b>      | 1" × 1" PEX          |
| <b>Length L1</b> | 2.38 in<br>60.5 mm   |
| <b>Length L2</b> | 2.38 in<br>60.5 mm   |
| <b>Angle</b>     | 90 °                 |
| <b>Weight</b>    | 0.020 kg<br>0.044 lb |
| <b>Pkg Qty</b>   | 10                   |

**Carton Qty**

150

**Unit**

ea.

Dimensions

**A**

0.85 in  
21.6 mm

**B**

1.53 in  
38.9 mm

**C**

0.47 in  
12.0 mm

**D**

0.47 in  
12.0 mm

**E**

1.53 in  
38.9 mm

**F**

0.85 in  
21.6 mm

**ID1**

0.61 in  
15.5 mm

**ID2**

0.61 in  
15.5 mm

Technical Data

**Material**

Modified Polyphenylsulfone

**Operating Temperature [Max]**

82.2 °C  
180 °F

**Operating Pressure [Max]**

6.9 bar  
100 psi

Listings

**Listings**

cNSFus-pw

## Codes

**Codes**

IAPMO UPC

## Standards

**Standards**

ASTM F877  
ASTM F2159  
CSA B137.5  
NSF/ANSI 14  
NSF/ANSI 61  
NSF/ANSI 372

## Installation

**Installation**

Installation must follow all of HeatLink's instructions and guidelines.

## Related Documents

**Related Documents**

HeatLink Limited Plumbing Warranty