



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 18225, 3/4" × 1/2" PEX HPP Elbow

High Performance Polymer PEX insert elbows. SS press sleeves sold separately.

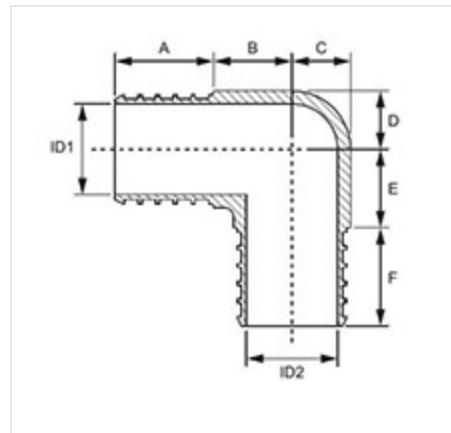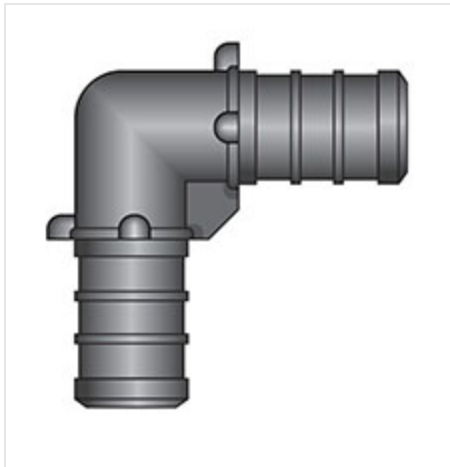

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size	3/4" × 1/2" PEX
Length L1	1.87 in 47.5 mm
Length L2	1.91 in 48.5 mm
Angle	90 °
Weight	0.007 kg 0.015 lb
Pkg Qty	10

Carton Qty

400

Unit

ea.

Dimensions

A

0.71 in
18.0 mm

B

1.16 in
29.5 mm

C

0.24 in
6.1 mm

D

0.33 in
8.5 mm

E

1.2 in
30.5 mm

F

0.71 in
18.0 mm

ID1

0.46 in
11.7 mm

ID2

0.31 in
8.0 mm

Technical Data

Material

Modified Polyphenylsulfone

Operating Temperature [Max]

82.2 °C
180 °F

Operating Pressure [Max]

6.9 bar
100 psi

Listings

Listings

cNSFus-pw

Codes

**Codes**

IAPMO UPC

Standards

**Standards**

ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation

**Installation**

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

**Related Documents**

HeatLink Limited Plumbing Warranty