

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :


Description

High Performance Polymer PEX insert couplings.

Technical Data

Material:..... Modified Polyphenylsulfone
Operating Pressure Rating:..... 180°F @ 100 psi (82.2°C @ 0.69 MPa)

Dimension Diagram

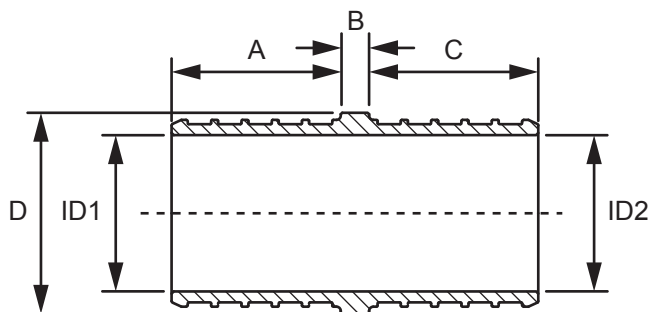

Listings

ICC-ES PMG 1087
cNSFus-pw
cQALus P371

Codes

IMC
IPC
IRC
NPC of Canada
NSPC
UMC
UPC

Standards

ASTM E84
ASTM F877
ASTM F2159
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a Potable Water Press System Installation Guide (L3235)
- HeatLink Limited Plumbing Warranty

PEX Insert Couplings

Qty	Stk. #	Size	Dimension, in / (mm)						Weight, lb / (kg)
			A	B	C	D	ID1	ID2	
	19005	1/2" x 1/2" PEX	0.71 (18.0)	0.10 (2.6)	0.71 (18.0)	0.63 (16.0)	0.31 (8.0)	0.31 (8.0)	0.007 (0.003)
	19022	3/4" x 3/4" PEX	0.71 (18.0)	0.10 (2.6)	0.71 (18.0)	0.83 (21.0)	0.46 (11.7)	0.46 (11.7)	0.013 (0.006)
	19028	1" x 1" PEX	0.86 (21.8)	0.12 (3.0)	0.86 (21.8)	0.98 (25.0)	0.61 (15.5)	0.61 (15.5)	0.023 (0.010)

PEX Insert Reducing Couplings

Qty	Stk. #	Size	Dimension, in / (mm)						Weight, lb / (kg)
			A	B	C	D	ID1	ID2	
	19225	3/4" x 1/2" PEX	0.71 (18.0)	0.10 (2.6)	0.71 (18.0)	0.83 (21.0)	0.46 (11.7)	0.31 (8.0)	0.010 (0.005)
	19282	1" x 3/4" PEX	0.86 (21.8)	0.12 (3.0)	0.71 (18.0)	0.98 (25.0)	0.61 (15.5)	0.46 (11.7)	0.019 (0.009)

This page is intentionally blank.