



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 19225, 3/4" × 1/2" PEX HPP Coupling

High Performance Polymer PEX insert reducing couplings. SS press sleeves sold separately.

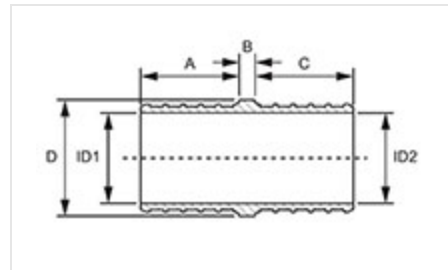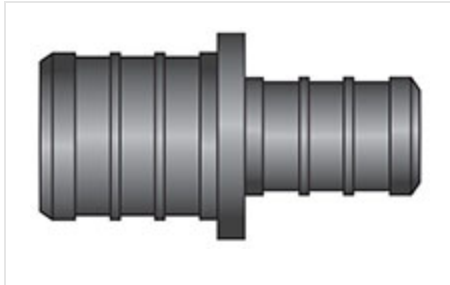

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size	3/4" × 1/2" PEX
Length	1.52 in 38.6 mm
Weight	0.005 kg 0.010 lb
Pkg Qty	25
Carton Qty	600
Unit	ea.

Dimensions

A	0.71 in 18.0 mm
B	0.10 in 2.6 mm
C	0.71 in 18.0 mm
D	0.83 in 21.0 mm
ID1	0.46 in 11.7 mm
ID2	0.31 in 8.0 mm

Technical Data

—

Material	Modified Polyphenylsulfone
Operating Temperature [Max]	82.2 °C 180 °F
Operating Pressure [Max]	6.9 bar 100 psi

Listings

—

Listings	cNSFus-pw
-----------------	-----------

Codes

—

Codes	IAPMO UPC
--------------	-----------

Standards

—

Standards	ASTM F877 ASTM F1807 CSA B137.5 NSF/ANSI 14 NSF/ANSI 61 NSF/ANSI 372
------------------	---

Installation		—
Installation	Installation Installation must follow all of HeatLink's instructions and guidelines.	
Related Documents		—
Related Documents	HeatLink Limited Plumbing Warranty	