



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 26333NL, 1-1/4" × 1-1/4" × 1-1/4" PEX No Lead Brass Tee

Solid no lead brass (C69300-ecobrass) 1-1/4" × 1-1/4" × 1-1/4" PEX insert tees. SS press sleeves sold separately.

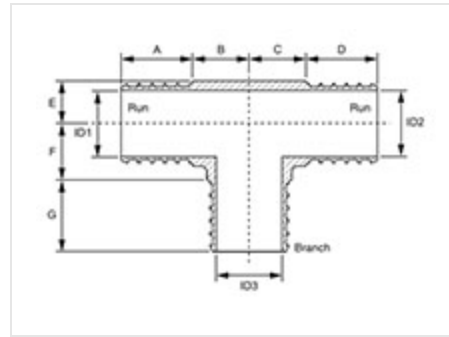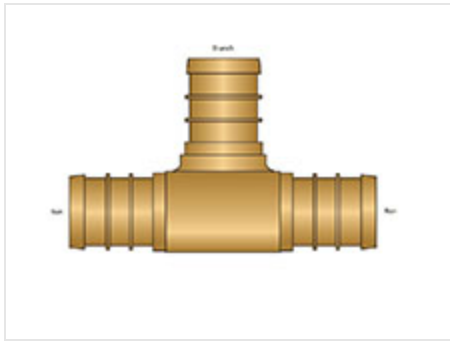

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size (run x run x branch)¹ 1 1/4" × 1 1/4" × 1 1/4" PEX

Length 1.69 in
43.1 mm

Length L1 1.69 in
43.1 mm

Height 1.69 in
43.3 mm

Weight 0.168 kg
0.370 lb

Pkg Qty 5

Carton Qty 80

Unit

ea.

Dimensions

A

0.94 in
24.0 mm

B

0.75 in
19.1 mm

C

0.75 in
19.1 mm

D

0.94 in
24.0 mm

E

0.56 in
14.3 mm

F

0.75 in
19.3 mm

G

0.94 in
24.0 mm

ID1

0.87 in
22.1 mm

ID2

0.87 in
22.1 mm

ID3

0.87 in
22.1 mm

Technical Data

Material

No Lead (Eco) Brass - C69300

Operating Temperature [Max]

82.2 °C
180 °F

Operating Pressure [Max]

6.9 bar
100 psi

Listings

Listings

cNSFus-pw

Codes

—

Codes

IAPMO UPC

Standards

—

Standards

ASTM F877
 ASTM F1807
 CSA B137.5
 NSF/ANSI 14
 NSF/ANSI 61
 NSF/ANSI 372

Installation

—

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

—

Related Documents

HeatLink Limited Plumbing Warranty

¹ **Note:** 1-1/2" and larger fittings may be ordered in less than package quantities; no surcharge.