

Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

Solid no lead brass PEX insert × sweat adapters.

Technical Data


Material:..... No Lead (Eco) Brass - C69300
 Working Pressure:..... 100 psi maximum
 Tested Pressure:..... 100 psi
 Maximum Temperature:..... 180°F / 82°C

Standards / Listings

ANSI/NSF-14
 ANSI/NSF-61 Annex G
 ASTM F1807
 ASTM F877

Qty	Stk. #	Size	A	B	Dimension C	D	E	Weight
	27105NL	½" PEX × ½" M/Sweat	0.49" (12.5 mm)	0.62" (15.9 mm)	0.50" (12.8 mm)	0.62" (16.0 mm)	1.25" (32.0 mm)	0.037 lb (0.017 kg)
	27205NL	½" PEX × ½" F/Sweat	0.62" (16.0 mm)	0.74" (19.0 mm)	0.62" (15.93 mm)	0.50" (12.7 mm)	1.25" (32.0 mm)	0.044 lb (0.020 kg)
	27122NL	¾" PEX × ¾" M/Sweat	0.74" (19.0 mm)	0.87" (22.25 mm)	0.77" (19.6 mm)	0.88" (22.5 mm)	1.51" (38.5 mm)	0.077 lb (0.035 kg)
	27222NL	¾" PEX × ¾" F/Sweat	0.75" (19.2 mm)	1.02" (26.0 mm)	0.87" (22.28 mm)	0.90" (23.0 mm)	1.53" (39.0 mm)	0.093 lb (0.042 kg)
	27328NL	¾" PEX × 1" F/Sweat	0.91" (23.2 mm)	1.29" (33.0 mm)	1.12" (28.65 mm)	1.06" (27.0 mm)	1.73" (44.0mm)	0.117 lb (0.053 kg)
	27128NL	1" PEX × 1" M/Sweat	0.94" (24.0 mm)	1.12" (28.6 mm)	0.96" (24.6 mm)	1.08" (27.5 mm)	1.88" (48.0 mm)	0.132 lb (0.060 kg)
	27228NL	1" PEX × 1" F/Sweat	0.91" (23.2 mm)	1.29" (33.0 mm)	1.12" (28.65 mm)	1.06" (27.0 mm)	1.87" (47.5 mm)	0.157 lb (0.071 kg)
	27135NL	1-¼" PEX × 1-¼" M/Sweat	0.98" (25.0 mm)	1.37" (34.95 mm)	1.18" (30.0 mm)	1.14" (29.0 mm)	2.08" (53.0 mm)	0.203 lb (0.092 kg)
	27235NL	1-¼" PEX × 1-¼" F/Sweat	0.97" (24.7 mm)	1.53" (39.0 mm)	1.37" (35.0 mm)	1.14" (29.0 mm)	2.08" (53.0 mm)	0.220 lb (0.100 kg)
	27141NL	1-½" PEX × 1-½" M/Sweat	0.98" (25.0 mm)	1.63" (41.3 mm)	1.46" (37.0 mm)	1.13" (28.8 mm)	2.28" (58.0 mm)	0.243 lb (0.110 kg)
	27154NL	2" PEX × 2" M/Sweat	1.34" (34.0 mm)	2.13" (54.1 mm)	1.92" (48.8 mm)	1.52" (38.6 mm)	3.02" (76.7 mm)	0.452 lb (0.205 kg)

Dimension Diagram

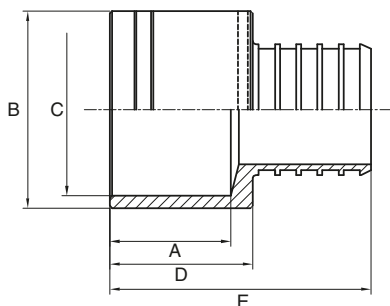

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- HeatLink Limited Plumbing Warranty