



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155

General Inquiries: info@heatlink.com



Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 27141NL, 1-1/2" PEX × 1-1/2" M/Sweat No Lead Brass Adapter

Solid no lead brass (C69300-ecobrass) 1-1/2" PEX insert × 1-1/2" sweat adapters. SS press sleeves sold separately.

Not intended for use with copper press fittings.

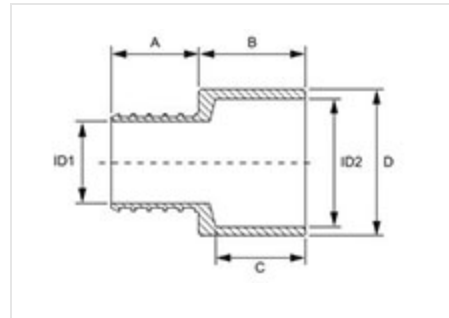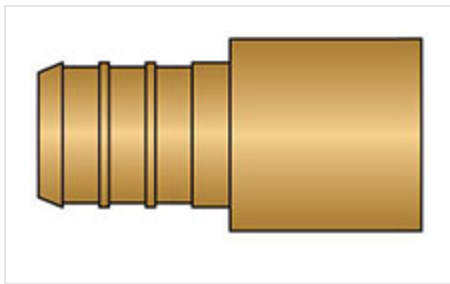

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size¹ 1 1/2" PEX × 1 1/2" M/Sweat

Length 2.28 in
58 mm

Weight 0.148 kg
0.327 lb

Carton Qty 80

Pkg Qty 5

Unit ea.

Dimensions

A	1.15 in 29.2 mm
B	1.13 in 28.8 mm
C	0.98 in 25.0 mm
D	1.63 in 41.3 mm
ID1	1.04 in 26.5 mm
ID2	1.46 in 37.0 mm

Technical Data

Material	No Lead (Eco) Brass - C69300
Operating Temperature [Max]	82.2 °C 180 °F
Operating Pressure [Max]	6.9 bar 100 psi

Listings

Listings	cNSFus-pw
-----------------	-----------

Codes

Codes	IAPMO UPC
--------------	-----------

Standards

Standards	ASTM F877 ASTM F1807 CSA B137.5 NSF/ANSI 14
------------------	--

NSF/ANSI 61
NSF/ANSI 372

Installation



Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents



Related Documents

HeatLink Limited Plumbing Warranty

¹ **Note:** 1-1/2" and larger fittings may be ordered in less than package quantities; no surcharge.