



**HeatLink Group Inc.**

**Head Office:**

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: [info@heatlink.com](mailto:info@heatlink.com)

Purchase Orders: [purchaseorder@heatlink.com](mailto:purchaseorder@heatlink.com)

Quotation Requests: [quotes@heatlink.com](mailto:quotes@heatlink.com)

**Item # 27528NL, 1" PEX × 1" MNPT No Lead Brass Adapter**

Solid brass no lead (C69300-ecobrass) 1" PEX insert × 1" MNPT adapters. SS press sleeves sold separately.

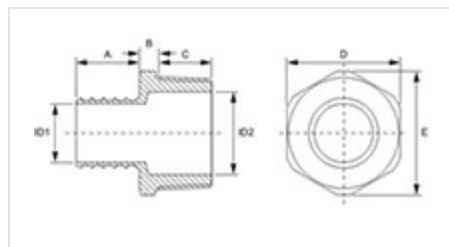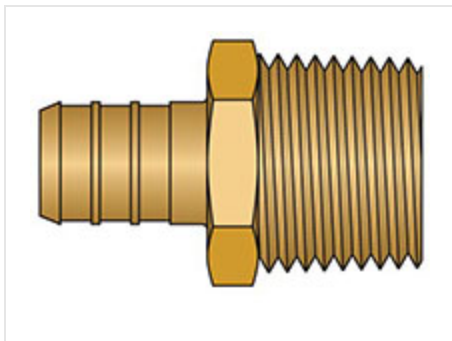

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

**Size<sup>1</sup>** 1" PEX × 1" MNPT

**Length** 1.87 in  
47.5 mm

**Weight** 0.096 kg  
0.212 lb

**Pkg Qty** 10

**Carton Qty** 150

**Unit** ea.

Dimensions

|     |                    |
|-----|--------------------|
| A   | 0.81 in<br>20.5 mm |
| B   | 0.31 in<br>8.0 mm  |
| C   | 0.75 in<br>19.0 mm |
| D   | 1.34 in<br>34.0 mm |
| E   | 1.52 in<br>38.5 mm |
| ID1 | 0.71 in<br>18.0 mm |
| ID2 | 0.98 in<br>25.0 mm |

Technical Data



|                             |                              |
|-----------------------------|------------------------------|
| Material                    | No Lead (Eco) Brass - C69300 |
| Operating Temperature [Max] | 82.2 °C<br>180 °F            |
| Operating Pressure [Max]    | 6.9 bar<br>100 psi           |

Listings



|          |           |
|----------|-----------|
| Listings | cNSFus-pw |
|----------|-----------|

Codes



|       |           |
|-------|-----------|
| Codes | IAPMO UPC |
|-------|-----------|

Standards



|                         |
|-------------------------|
| ASTM F877<br>ASTM F1807 |
|-------------------------|

**Standards**

CSA B137.5  
NSF/ANSI 14  
NSF/ANSI 61  
NSF/ANSI 372

Installation —

**Installation**

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents —

**Related Documents**

HeatLink Limited Plumbing Warranty

<sup>1</sup> **Note:** 1-1/2" and larger fittings may be ordered in less than package quantities; no surcharge.