



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 27541NL, 1-1/2" PEX × 1-1/2" MNPT No Lead Brass Adapter

Solid brass no lead (C69300-ecobrass) 1-1/2" PEX insert × 1-1/2" MNPT adapters. SS press sleeves sold separately.

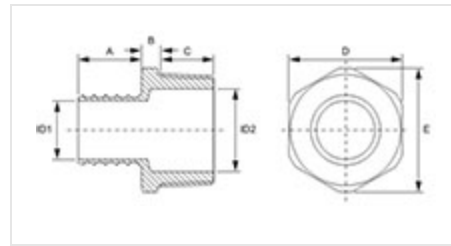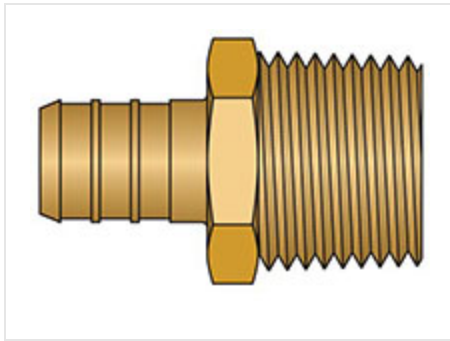

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#) | [Installation](#) | [Related Documents](#)

Specifications

Size¹	1 1/2" PEX × 1 1/2" MNPT
Length	2.42 in 61.5 mm
Weight	0.231 kg 0.509 lb
Pkg Qty	5
Carton Qty	50
Unit	ea.

Dimensions

A	1.15 in 29.2 mm
B	0.25 in 6.3 mm
C	1.02 in 26.0 mm
D	2.01 in 51.0 mm
E	2.32 in 58.9 mm
ID1	1.04 in 26.5 mm
ID2	1.50 in 38.0 mm

Technical Data

—

Material	No Lead (Eco) Brass - C69300
Operating Temperature [Max]	82.2 °C 180 °F
Operating Pressure [Max]	6.9 bar 100 psi

Listings

—

Listings	cNSFus-pw
----------	-----------

Codes

—

Codes	IAPMO UPC
-------	-----------

Standards

—

ASTM F877 ASTM F1807

Standards

CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372

Installation —

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents —

Related Documents

HeatLink Limited Plumbing Warranty

¹ **Note:** 1-1/2" and larger fittings may be ordered in less than package quantities; no surcharge.