



HeatLink Group Inc.

Head Office:

4603E - 13th Street NE

Calgary, AB, Canada

T2E 6M3

Toll Free (Canada & USA): 1-800-661-5332

Fax (Canada): 1-866-450-1155

Fax (USA): 1-800-869-6098

International Phone: +1 (403) 250-3432

International Fax: +1 (403) 250-1155



General Inquiries: info@heatlink.com

Purchase Orders: purchaseorder@heatlink.com

Quotation Requests: quotes@heatlink.com

Item # 28041NL, 1-1/2" × 1-1/2" PEX No Lead Brass Elbow

Solid no lead brass (C69300-ecob brass) 1-1/2" PEX insert × 1-1/2" PEX insert elbows. SS press sleeves sold separately.

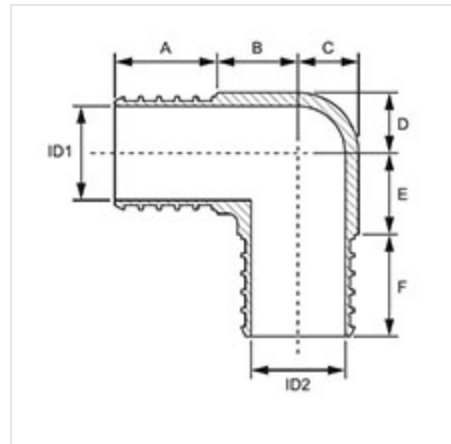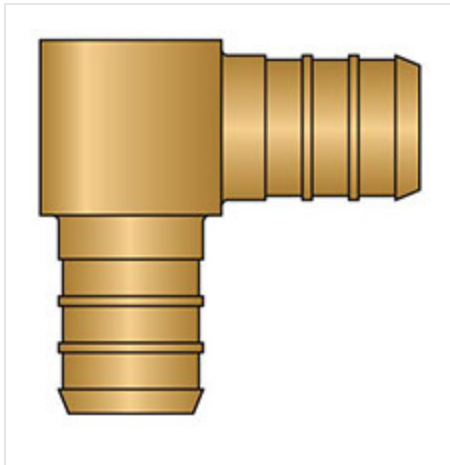

[Specifications](#) | [Dimensions](#) | [Technical Data](#) | [Listings](#) | [Codes](#) | [Standards](#)

Specifications

Size¹	1 1/2" × 1 1/2" PEX
Length L1	3.18 in 80.8 mm
Length L2	3.18 in 80.8 mm
Angle	90 °
Weight	0.193 kg 0.425 lb
Pkg Qty	5

Carton Qty

50

Unit

ea.

Dimensions

A

1.15 in
29.2 mm

B

2.03 in
51.6 mm

C

0.65 in
16.5 mm

D

0.65 in
16.5 mm

E

2.03 in
51.6 mm

F

1.15 in
29.2 mm

ID1

1.02 in
25.9 mm

ID2

1.02 in
25.9 mm

Technical Data

Material

No Lead (Eco) Brass - C69300

Operating Temperature [Max]

82.2 °C
180 °F

Operating Pressure [Max]

6.9 bar
100 psi

Listings

Listings

cNSFus-pw

Codes		—
Codes	IAPMO UPC	

Standards		—
Standards	ASTM F877 ASTM F1807 CSA B137.5 NSF/ANSI 14 NSF/ANSI 61 NSF/ANSI 372	

¹ **Note:** 1-1/2" and larger fittings may be ordered in less than package quantities; no surcharge.