


Job or Customer :	
Location :	
Engineer :	
☐ Complies with Spec ☐ Alternate	Notes :
Contractor :	
HeatLink Rep :	
Submitted By :	Date :
Approved By :	Date :
P.O. Number :	Date :

Description

High Performance Polymer PEX F1960 plugs for use with PEX-a potable water expansion systems.

Qty	Stk. #	Size	Dimension, in/(mm)				Weight, lb/(kg)
			A	B	C	ID	
	EX15005	½"	0.712 (18.0)	0.140 (3.6)	0.844 (21.4)	0.41 (10.4)	0.007 (0.003)
	EX15022	¾"	0.943 (24.0)	0.142 (3.6)	1.094 (27.8)	0.61 (15.5)	0.013 (0.006)
	EX15028	1"	1.171 (29.7)	0.142 (3.6)	1.33 (33.8)	0.81 (20.6)	0.024 (0.011)
	EX15035	1¼"	1.437 (36.5)	0.157 (4.0)	1.7 (43.2)	0.97 (24.64)	0.046 (0.021)
	EX15041	1½"	1.705 (43.3)	0.197 (5.0)	1.811 (46.0)	1.084 (27.54)	0.062 (0.028)
	EX15054	2"	2.149 (54.6)	0.236 (6.0)	2.52 (64.0)	1.484 (37.7)	0.152 (0.069)

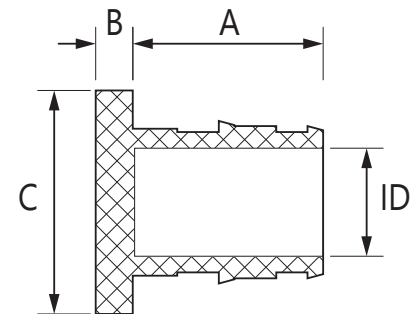

Technical Data

Specifications

Material	PPSU
Operating Pressure rating	180°F @ 100psi (82.2°C @ 0.69MPa)

Listings

ICC-ES PMG 1087
cNSFus-pw
cQAlus P371

Codes

IMC
IPC
IRC
NPC of Canada
NSPC
UMC
UPC

Standards

ASTM E84
ASTM F1960
ASTM F877
CSA B137.5
NSF/ANSI 14
NSF/ANSI 61
NSF/ANSI 372
ULC S102.2

Installation

Installation must follow all of HeatLink's instructions and guidelines.

Related Documents

- PEX-a F1960 Potable Water Expansion System Installation Guide (L3240)
- HeatLink Limited Plumbing Warranty

This page is intentionally blank.