




HOLDRITE
14284 Danielson Street Poway
CA 92064
Phone: 800-321-0316
Email: sales@holdrite.com
Website: www.holdrite.com

Item # 269, Noise and Vibration Isolation Standard Clamp

Model #'s 266 thru 269 can be used as a top mount or suspension hanger, e.g., from a joist or cross-member, or from a HOLDRITE Stout Bracket®. These models are used for securing and retaining tubing while providing superior acoustical isolation between the tubing and the supporting structure. Supports 1/2", 3/4", 1" & 1-1/4" CTS tube sizes. Supports Copper, PEX, CPVC tubing, conduit, etc. UPC listed.

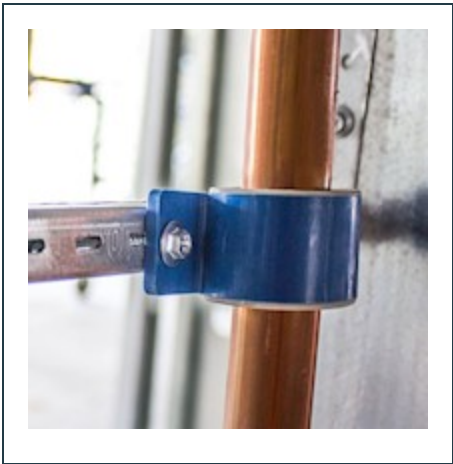

Specifications | Features

Specifications	
Size	1-1/4
Material	Polypropylene, blue
Liner Material	TPR, natural (off-white), 40 to 45 shore A
Industry Standards/Certifications	FR UL94V-2
Load Capacity	25 lb
Operating Temperature [Min]	-10 °F
Operating Temperature [Max]	140 °F

Features

Features

IAPMO listed, per standard PS42-2013
UPC / IPC listed