

MP953C-F Pneumatic Actuators

SPECIFICATION DATA



FEATURES

- Rolling diaphragm for long life and low hysteresis
- Easily attached to valve
- May be installed after piping valve
- Slide lock feature permits simple engagement to valve stem
- Direct- or reverse-action control
- Models available with positive positioning relay

GENERAL

MP953 Pneumatic Actuators operate V5011 and V5013 Valves to provide proportional control of steam or hot and cold liquids of HVAC systems.



DESCRIPTION

MP953 Pneumatic Actuators operate V5011 and V5013 Valves to provide proportional control of steam or hot and cold liquids of HVAC systems.

SPECIFICATIONS

Models:

✓	Model	Action	Positive Positioner	Diaphragm Diameter in Inches (mm)	Effective Area of Diaphragm in Sq. Inches	Stroke in Inches (mm)	Operating Range in psi (kPa)
	MP953C	Direct	No	5 (130)	11	3/4 (19)	2 to 7 (12 to 50) or
				8 (203)	33	3/4 (19)	4 to 11 (30 to 75) or
				13 (330)	99	3/4 (19 or 1-1/2 (38)	8 to 12 (55 to 85)
	MP953D	Reverse	No	7 (180)	21.6	3/4 (19)	4 to 11 (30 to 75) or
	MP953E	Direct	Yes	5 (130)	11	3/4 (19)	3 to 7 (20 to 50) or
				8 (203)	33	3/4 (19) or 1-1/2 (38)	4 to 11 (30 to 75) or
				13 (330)	99	3/4 (19) or 1-1/2 (38)	8 to 13 (55 to 90)
	MP953F	Reverse	Yes	7 (180)	21.6	3/4 (19)	3, 5 or 10 (20, 35, or 70) ¹
							Same as MP953E

¹Start point is adjustable from 1-1/2 (10) to 13 psi (90 kPa) in 1/4 psi (1-1/2 kPa) increments.

Maximum Actuator Diaphragm Temperature:

MP953C and E: 160F (71C)
MP953D and F: 200F (93C)

Maximum Positive Positioner Diaphragm Temperature:

160F (71C)

Maximum Safe Operating Pressure:


25 psi (172 kPa)

Accessories:

Position Indicator for:

5-in. (127 mm) dia: 316028A
7-in. (178 mm) dia: 316035A
8-in. (203 mm) dia: 316037A
13-in. (330 mm) dia, 3/4 in. (19 mm) stroke: 14004722-001
13-in. (330 mm) dia, 1-1/2 in. (38 mm) stroke: 316036A
14000501-001: Valve Bonnet Extension Kit (separates actuator 2-1/2 in. [64 mm] from valve for high-temperature applications)
CCT 3858: Corrosion-Resistant Spray

Dimensions in Inches (Millimeters):

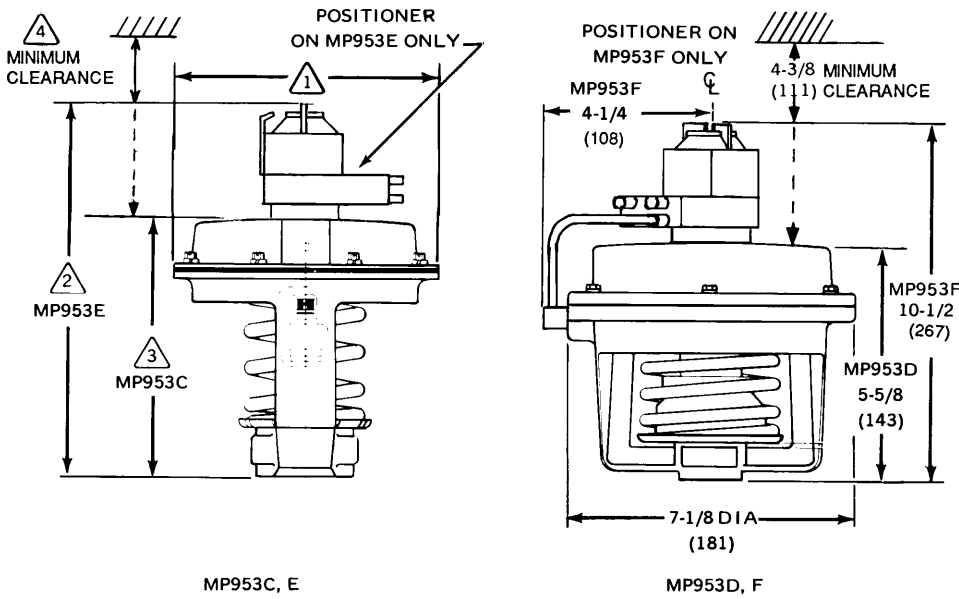

OPERATOR SIZE NOMINAL DIA				
5-INCH	5-1/8 (130)	9-1/4 (235)	4-5/8 (117)	4-3/8 (111)
8-INCH	8-1/4 (210)	11-1/8 (283)	6-1/2 (165)	5-3/8 (137)
13-INCH	13-1/2 (343)	18-1/8 (460)	10 (254)	7-11/16 (195)

S16770-2