


SPECIFICATION:

Furnish and install roof vent flashing with 24 gauge galvanized steel base, fitted with elastomer collar. Unit shall be Water-Tite item number checked below as manufactured by IPS Corporation, as per corresponding dimensional characteristics, or equivalent. **(Do not use Petroleum based mastics, sealing compounds, or paints on collar portion of all flashings, on all hardbase, flexible , or rain collars.)**

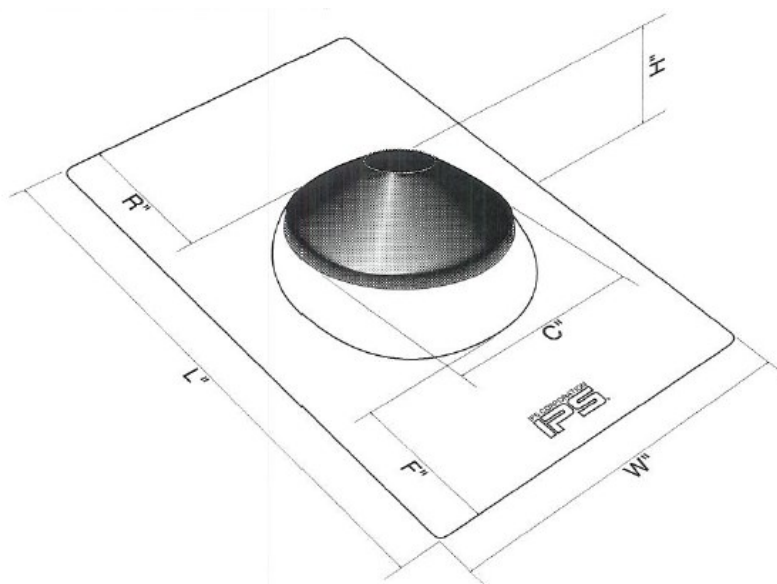

Florida Building Code Approved
#FL3066-R2

Product Code	Model	Vent Size	Dim. W	Dim. L	Dim. R	Dim. F	Dim. C	Dim. H
81850	GB1	1 ¼" - 1 ½"	8 ¾"	12 ½"	3 ½"	2 ⅜"	4 ¼"	2 ¼"
81855	GB2	2"	8 ¾"	12 ½"	3 ½"	2 ⅜"	4 ¼"	2 ¼"
81860	GB3	3"	10 ¾"	14 ½"	2 ⅝"	2 ⅜"	5 ½"	2"
81865	GB4	4"	12"	16"	3 ¾"	2 ¾"	6 ½"	2 ⅛"
81870	GB5	½", ¾", 1"	8 ¾"	12 ½"	3 ½"	2 ⅜"	4 ¼"	2 ⅝"
81872	GB118	1 ¼" - 1 ½"	18"	18"	6 ¼"	5 ⅞"	4 ¼"	2 ¼"
81874	GB218	2"	18"	18"	6 ¼"	5 ⅞"	4 ¼"	2 ¼"
81876	GB318	3"	18"	18"	5 ⅜"	5 ⅞"	5 ½"	2"
81878	GB418	4"	18"	18"	4 ¾"	3 ¾"	6 ½"	2 ⅛"
81879	GB518	½", ¾", 1"	18"	18"	6 ¼"	5 ⅞"	4 ¼"	2 ⅝"
81880	GB4118	1 ¼" - 4"	18"	18"	4 ¾"	3 ¾"	6 ½"	2 ⅛"