



SPECIFICATION:

JOSAM 60500B-EXT SERIES EPOXY COATED FABRICATED STEEL OIL SEPARATOR, THREADED CONNECTIONS, DEEP ROUGHING, INTERNAL EXTENSION, INTERNAL TRAP, SEDIMENT BUCKET, TWO-VENT CONNECTIONS ON EACH SIDE, GASKETED NON-SKID COVER AND FLOW-CONTROL FITTING.

OIL SEPARATOR DRAW-OFF, GRAVITY TYPE

SERIES **60500B-EXT**

FORMERLY 60520A SERIES

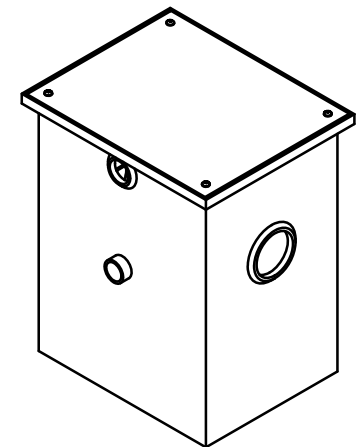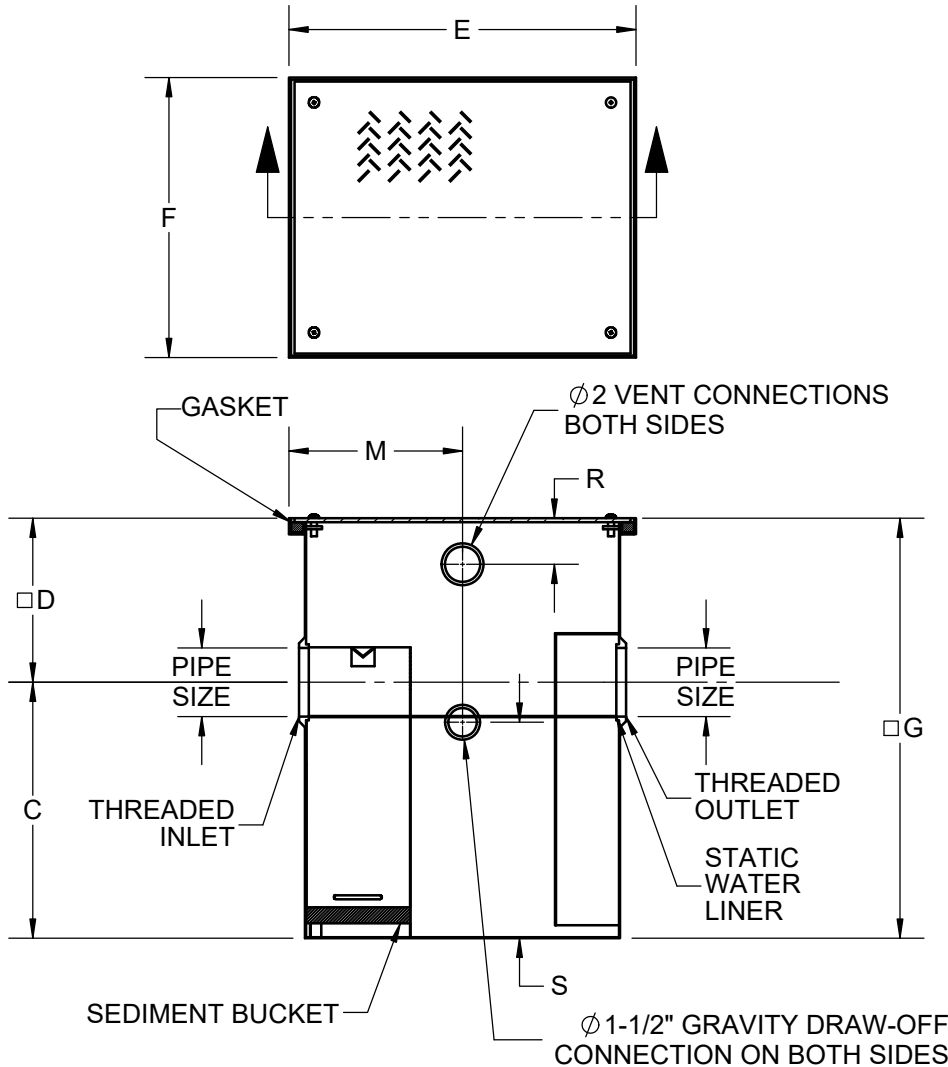

PRODUCT IS NON-CANCELABLE
AND NON-RETURNABLE

NAME: _____

SIGNATURE: _____

DATE: _____

☒	-EXT	EXTENSION, 6" STANDARD (SPECIFY EXT. HEIGHT)
☐	-EST	EXTRA STORAGE TANK
☐	-60	ANCHOR FLANGE (4" DOWN FROM TOP)
☐	-61	FLANGE AND CLAMP DEVICE (4" DOWN FROM TOP)
☐	-HD	HEAVY-DUTY COVER

FOR CUSTOM EXTENSION HEIGHT:

SPECIFY "D" DIMENSION= _____ IN.

NEW "G" DIMENSION= _____ IN.
("C" + "D")

	TYPE	FLOW RATE (GPM)	PIPE SIZE	C	□ D	E	F	□ G	M	R	S
☐	60503B	10	2"	10 1/2"	10 1/8"	15 1/2"	12 3/8"	20 5/8"	7 3/4"	2 3/4"	8 1/2"
☐	60504B	15	2"	12 3/4"	9 3/8"	18 1/4"	14 1/2"	22 1/8"	9 1/8"	2 3/4"	10 3/4"
☐	60505B	20	*3"	14 5/8"	10 3/8"	20"	16 3/8"	25"	10"	2 3/4"	12"
☐	60506B	25	*3"	16"	10"	21 3/4"	17 1/2"	26"	10 7/8"	2 3/4"	13 1/2"
☐	60507B	35	*3"	16 3/4"	10 7/8"	25 1/4"	19 1/4"	27 5/8"	12 5/8"	2 3/4"	14 1/4"
☐	60508B	50	*3"	18 1/2"	12 1/4"	28 3/4"	21 1/2"	30 3/4"	14 3/8"	2 3/4"	16"

□ DIMENSIONS BASED ON STANDARD 6" EXTENSION

* 3" SIZES NORMALLY FURNISHED WITH 4" x 3" REDUCING BUSHINGS

DATE OF LAST CHANGE: 04/29/21

DIMENSIONS ARE SUBJECT TO MANUFACTURERS
TOLERANCES AND CHANGE WITHOUT NOTICE.
WE CAN ASSUME NO RESPONSIBILITY FOR
USE OF SUPERSEDED OR VOID DATA.

JOSAM
MICHIGAN CITY, INDIANA

NOTES