

VERTICAL ADJUSTABLE FITTINGS

12714-D4 No-Hub, Single, Two 4" Branches, R.H. 2" Vent  Page 29	12714-HS-HD4 Hub & Spigot, Single, Two 4" Branches, R.H. 2" Vent  Page 29	12724 No-Hub, Back-to-Back, 2" Vent  Page 30	12724-HS Hub & Spigot, Back-to-Back, 2" Vent  Page 31	12724-VS4 No-Hub, Back-to-Back, 4" Branch, 2" Vent Same Side  Page 31	12724-OS4 No-Hub, Back-to-Back, 4" Branch, 2" Vent Opposite Side  Page 31
--	--	---	---	--	--

VERTICAL ADJUSTABLE FITTINGS

12724-HS-HVS4 Hub & Spigot, Back-to-Back, Single Branch, 2" Vent  Page 31	12724-D4 No-Hub, Back-to-Back, Two 4" Branches, 2" Vent  Page 31	12724-HS-HD4 Hub & Spigot, Back-to-Back, Two 4" Branches, 2" Vent  Page 31	14004/14024 L.H. Offset, L.H. 2" Vent R.H. Offset, R.H. 2" Vent  Page 32	14044 Back-to-Back, Offset, 2" Vent  Page 32	14064 Single, On-Stack, 4" Vent  Page 33
--	---	---	---	---	---

VERTICAL CLOSE FITTINGS

14104 Single, On-Stack, 2" Vent  Page 33	14404/14424 L.H. Offset, L.H. 2" Vent R.H. Offset, R.H. 2" Vent  Page 34	14444 Back-to-Back, Offset, 2" Vent  Page 34	14464 Single, On-Stack, 4" Vent  Page 35	14484 Back-to-Back, On-Stack, 4" Vent  Page 35	14504 Single, On-Stack, 2" Vent  Page 36
---	--	---	--	---	---

90° INSTITUTIONAL CARRIERS

15964 Vertical, 2" Vent, 4" Branches  Page 37	15984 Vertical, 2" Vent, 4" Branches  Page 37
--	--

FLOOR-MOUNTED



16123 Single, On-Stack, 3" PVC Fitting Adapter  Page 38
--

VERTICAL 4" NO-HUB, ADJUSTABLE, BACK-TO-BACK

12724

APPLICATION: For use with Siphon Jet or Blowout Closets in No-Hub piping systems where back-to-back adjustable fitting with vertical flow is desired.

Back-to-Back Fitting, On Stack, 2" Vent

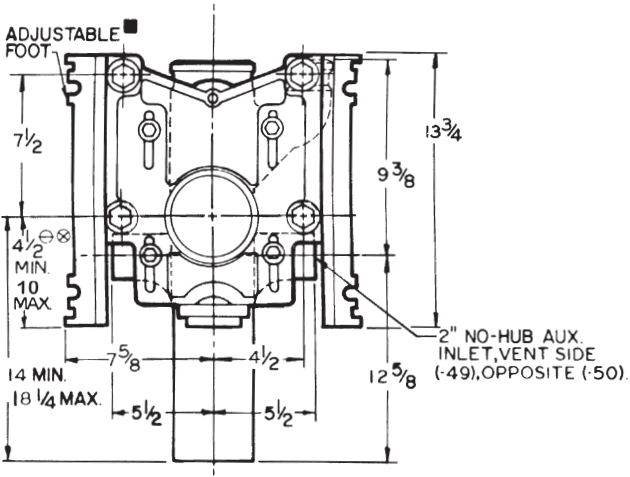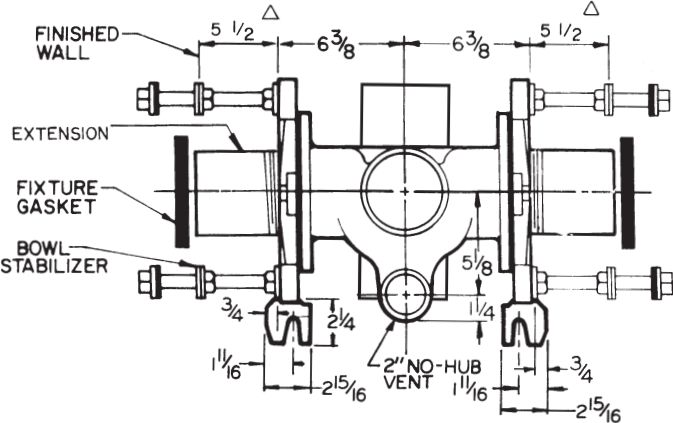

117 LBS.

OPTIONS N/A: -HD4, -HVS4.

OPTIONS & NOTES

- | | | | |
|---------|--------------------------------|-------|--|
| –PF | Pylon Foot, Std. | –6 | Supply Pipe Support (Specify Type of Pipe) |
| –OR | O-Ring Carrier | –10 | ABS Extension, through 10-1/2" Wall |
| –SD | Special-Duty 500 lb. Carrier | –24 | Carrier for Floor-Mounted, Back-Outlet China Bowls |
| ▼ –HS | Hub & Spigot | –30 | Cast Iron Adjustable Extension with Connector |
| ▼ –D4 | Double 4" No-Hub Branches | –30–2 | Cast Iron Adjustable Extension with Connector and Test Cap |
| ▼ –HD4 | Double 4" Hub Branches | –32 | Carrier for Wide Chase Installations |
| ▼ –VS4 | Vent Side 4" No-Hub Branch | –35 | Closet Carrier for Wheelchair High Rough |
| ▼ –OS4 | Opposite Vent 4" No-Hub Branch | –49 | No-Hub High Auxiliary Inlet, Under Vent |
| ▼ –HVS4 | Vent Side 4" Hub Branch | –50 | No-Hub High Auxiliary Inlet, Opposite Vent |
| –VP | Vandal-Proof Trim | –53 | Threaded High Auxiliary Inlet, Under Vent |
| –1 | Positioning Frame | –54 | Threaded High Auxiliary Inlet, Opposite Vent |

■ RECOMMENDED ALL FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS BY OTHERS.


DIM. SHOWN IS FOR SIPHON JET. BLOWOUT IS: ⌀ 11" MIN. & 16-1/2" MAX.

⊗ FOR ROUGHING OVER 6" FOR SIPHON JET OR 12-1/2" FOR BLOWOUT, SPECIFY ON ORDER.

△ FOR DIM. SHORTER THAN 5-1/2" (1" MIN.) CUT EXT. SPECIFY –10 FOR LONGER EXT. (10-1/2" MAX.)

12724-HS SERIES

Back-to-Back, 2" Vent

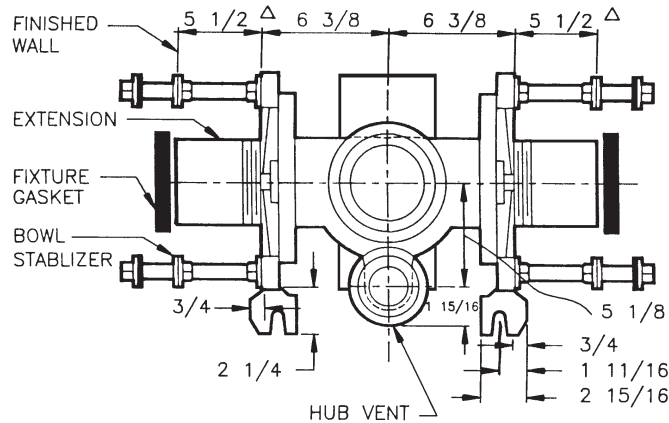


129 LBS.

OPTIONS N/A: -D4, -VS4, -OS4

12724-VS4 SERIES

Back-to-Back, 4" Branch, 2" Vent Same Side

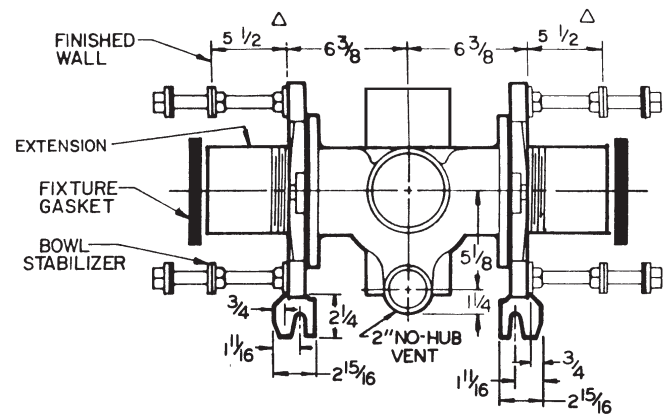


116 LBS.

OPTIONS N/A: -49, -53

12724-OS4 SERIES

Back-to-Back, 4" Branch, 2" Vent Opposite Side

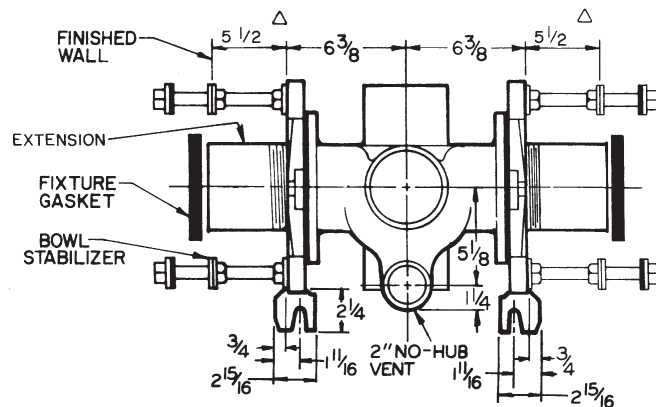


116 LBS.

OPTIONS N/A: -50, -54

12724-HS-HVS4 SERIES

Back-to-Back, Single Branch, 2" Vent

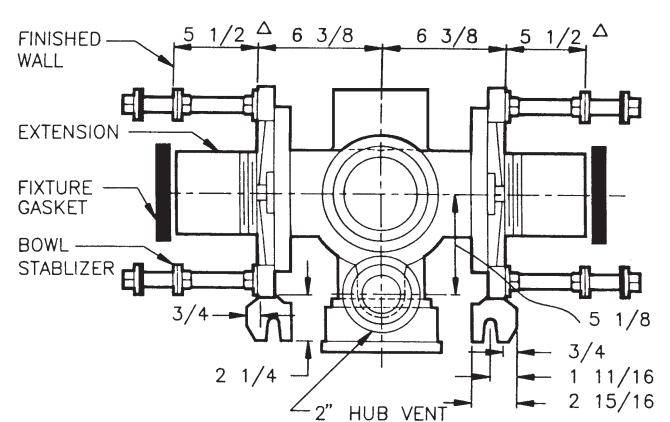


118 LBS.

OPTIONS N/A: -49, -53

12724-D4 SERIES

Back-to-Back, Two 4" Branches, 2" Vent

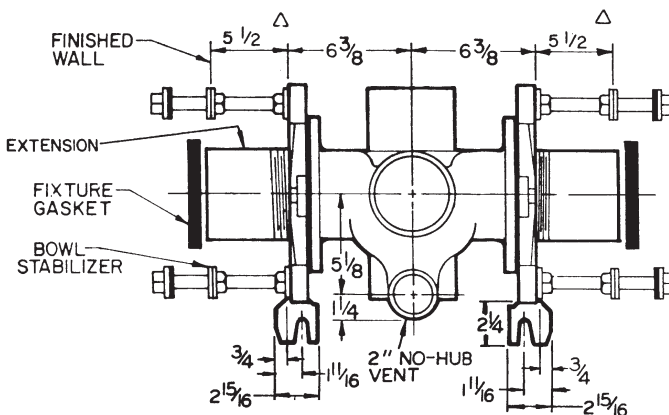


115 LBS.

OPTIONS N/A: -49, -50, -53, -54

12724-HS-HD4 SERIES

Back-to-Back, Two 4" Branches, 2" Vent

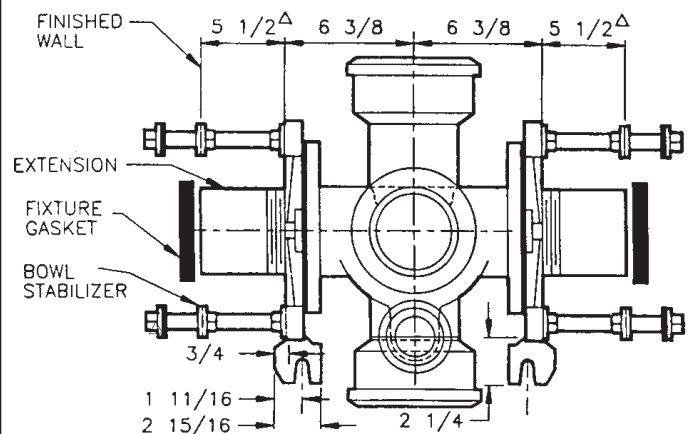

131 LBS.

OPTIONS N/A: -49, -50, -53, -54