





CARRIERS		12000 TRIM PACKS		
11001 With 4" Pipe Grip Adapter  Page 23	11007/11008 With 3" & 4" Copper Fitting Adapters  Page 23	12000  Page 14	12000-OR  Page 15	12000-32  Pages 16

HORIZONTAL ADJUSTABLE FITTINGS				VERTICAL ADJ. FITTINGS	
12674/12684 No-Hub, Single, 12674, L.H., 12684, R.H.  Page 24	12694 No-Hub, Back-to-Back  Page 24	12674/12684-HS Hub & Spigot, Single, 12674-HS, L.H., 12684-HS, R.H.  Page 25	12694-HS Hub & Spigot, Back-to-Back  Page 25	12704 No-Hub, Single, L.H. 2" Vent  Page 26	12704-HS Hub & Spigot, Single, L.H. 2" Vent  Page 26

VERTICAL ADJUSTABLE FITTINGS					
12704-LH4 No-Hub, Single, L.H. 4" Branch, L.H. 2" Vent  Page 26	12704-HS-HLH4 Hub & Spigot, Single, L.H. 4" Branch, L.H. 2" Vent  Page 27	12704-RH4 No-Hub, Single, R.H. 4" Branch, L.H. 2" Vent  Page 27	12704-HS-HRH4 Hub & Spigot, Single, R.H. 4" Branch, L.H. 2" Vent  Page 27	12704-D4 No-Hub, Single, Two 4" Branches, L.H. 2" Vent  Page 27	12704-HS-HD4 Hub & Spigot, Single, Two 4" Branches, L.H. 2" Vent  Page 27



VERTICAL ADJUSTABLE FITTINGS					
12714 No-Hub, Single, R.H. 2" Vent  Page 28	12714 -HS Hub & Spigot, Single, R.H. 2" Vent  Page 28	12714-RH4 No-Hub, Single, R.H. 4" Branch, R.H. 2" Vent  Page 28	12714-HS-HRH4 Hub & Spigot, Single, R.H. 4" Branch, R.H. 2" Vent  Page 29	12714-LH4 No-Hub, Single, L.H. 4" Branch, R.H. 2" Vent  Page 29	12714-HS-HLH4 Hub & Spigot, Single, L.H. 4" Branch, R.H. 2" Vent  Page 29

VERTICAL 4" NO-HUB, ADJUSTABLE, SINGLE

12704

APPLICATION: For use with Siphon Jet or Blowout Closets in No-Hub piping systems where back-to-back adjustable fitting with vertical flow is desired.

Single Fitting, On Stack, Left-Hand 2" Vent

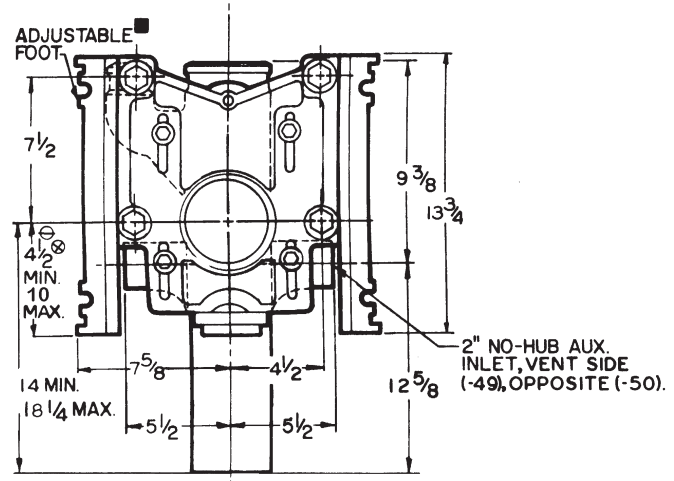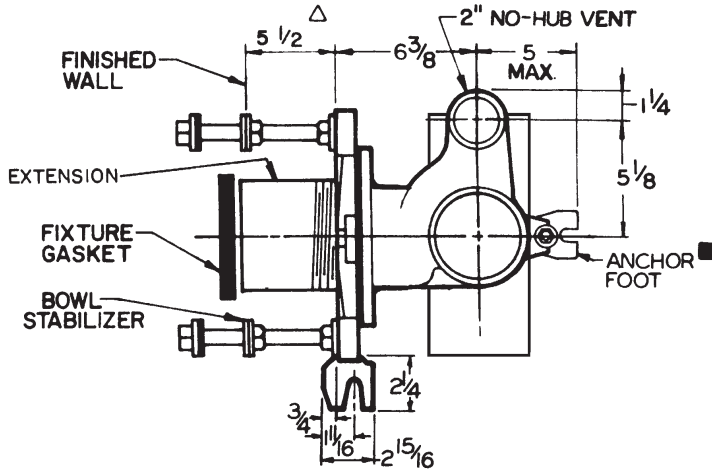

72 LBS.


OPTIONS N/A: -LH4, -RH4, -D4

OPTIONS

- | | | | |
|---------|------------------------------|-------|--|
| -PF | Pylon Foot, Std. | -6 | Supply Pipe Support (Specify Type of Pipe) |
| -OR | O-Ring Carrier | -10 | ABS Extension, through 10-1/2" Wall |
| -SD | Special-Duty 500 lb. Carrier | -24 | Carrier for Floor-Mounted, Back-Outlet China Bowls |
| ▼ -HS | Hub & Spigot | -30 | Cast Iron Adjustable Extension with Connector |
| ▼ -LH4 | Left-Hand 4" No-Hub Branch | -30-2 | Cast Iron Adjustable Extension with Connector and Test Cap |
| ▼ -HLH4 | Left-Hand 4" Hub Branch | -32 | Carrier for Wide Chase Installations |
| ▼ -RH4 | Right-Hand 4" No-Hub Branch | -35 | Closet Carrier for Wheelchair High Rough |
| ▼ -HRH4 | Right-Hand 4" Hub Branch | -49 | No-Hub High Auxiliary Inlet, Under Vent |
| ▼ -D4 | Double 4" No-Hub Branches | -50 | No-Hub High Auxiliary Inlet, Opposite Vent |
| ▼ -HD4 | Double 4" Hub Branches | -53 | Threaded High Auxiliary Inlet, Under Vent |
| -VP | Vandal-Proof Trim | -54 | Threaded High Auxiliary Inlet, Opposite Vent |
| -1 | Positioning Frame | | |

12704-HS SERIES


Single, Left-Hand 2" Vent, Hub & Spigot

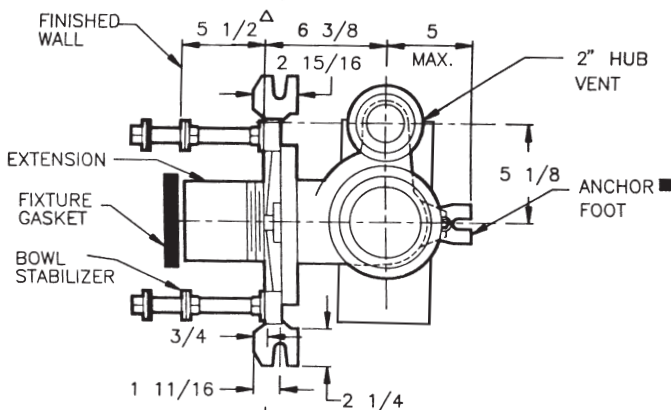

83 LBS.

12704-LH4 SERIES

Single, Left-Hand 4" Branch, Left-Hand 2" Vent

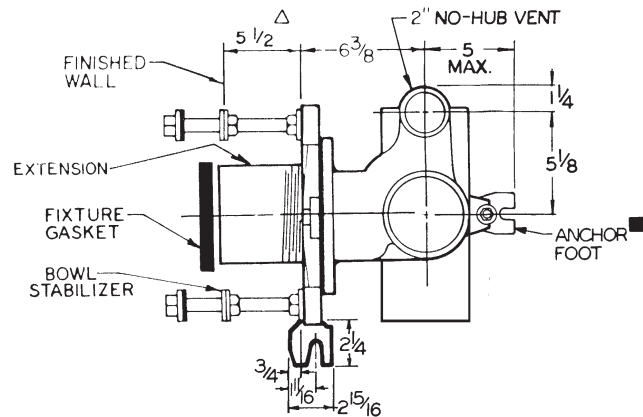

71 LBS.

OPTIONS N/A: -49, -53

■ RECOMMENDED ALL FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS BY OTHERS.


DIM. SHOWN IS FOR SIPHON JET. BLOWOUT IS: ⊕ 11" MIN. & 16-1/2" MAX.

⊗ FOR ROUGHING OVER 6" FOR SIPHON JET OR 12-1/2" FOR BLOWOUT, SPECIFY ON ORDER.

△ FOR DIM. SHORTER THAN 5-1/2" (1" MIN.) CUT EXT. SPECIFY -10 FOR LONGER EXT. (10-1/2" MAX.)

12704-HS-HLH4 SERIES

Single, Left-Hand Branch, Left-Hand 2" Vent

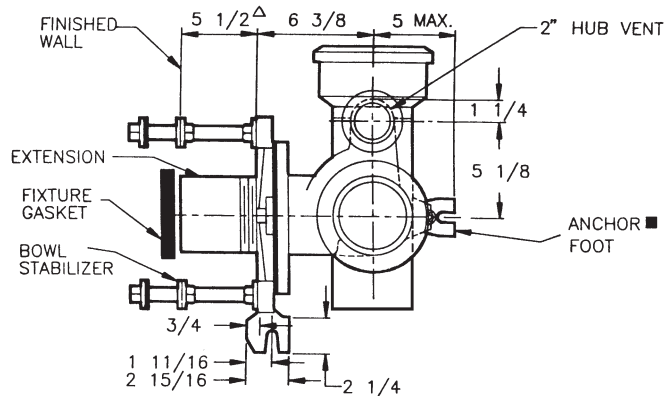


84 LBS.

OPTIONS N/A: -49, -53

12704-RH4 SERIES

Single, Right-Hand 4" Branch, Left-Hand 2" Vent

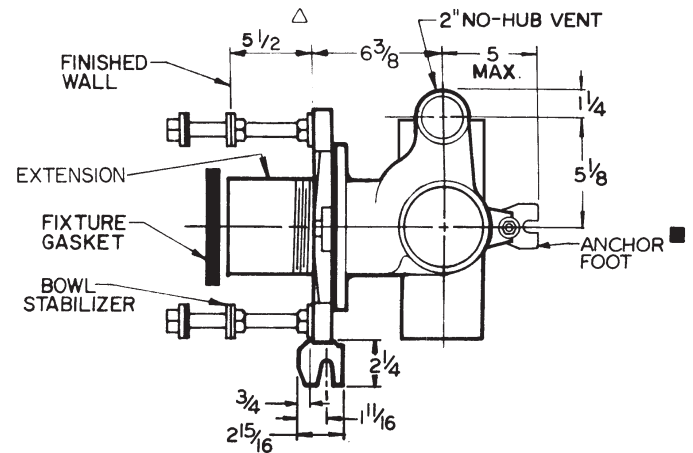


71 LBS.

OPTIONS N/A: -50, -54

12704-HS-HRH4 SERIES

Single, Right-Hand Branch, Left-Hand 2" Vent

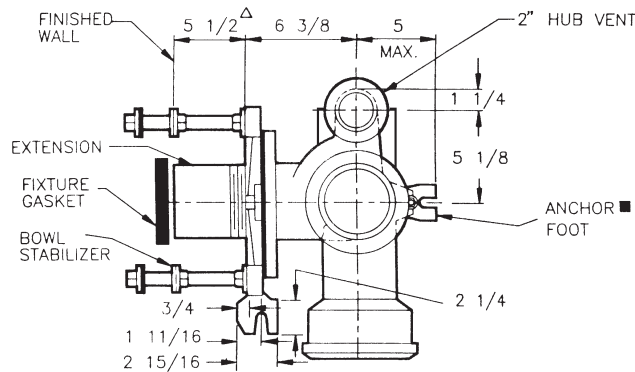


84 LBS.

OPTIONS N/A: -50, -54

12704-D4 SERIES

Single, Two 4" Branches, Left-Hand 2" Vent

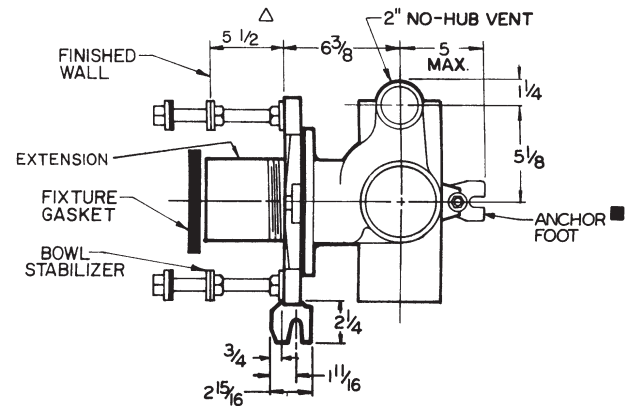


70 LBS.

OPTIONS N/A: -49, -50, -53, -54

12704-HS-HD4 SERIES

Single, Two 4" Branches, Left-Hand 2" Vent

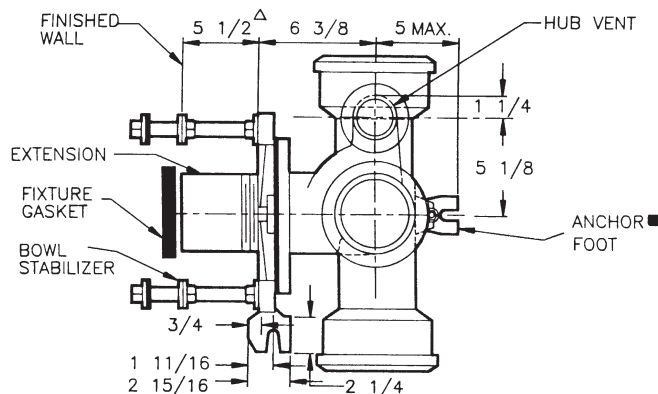

86 LBS.

OPTIONS N/A: -49, -50, -53, -54