





CARRIERS		12000 TRIM PACKS		
11001 With 4" Pipe Grip Adapter  Page 23	11007/11008 With 3" & 4" Copper Fitting Adapters  Page 23	12000  Page 14	12000-OR  Page 15	12000-32  Pages 16

HORIZONTAL ADJUSTABLE FITTINGS				VERTICAL ADJ. FITTINGS	
12674/12684 No-Hub, Single, 12674, L.H., 12684, R.H.  Page 24	12694 No-Hub, Back-to-Back  Page 24	12674/12684-HS Hub & Spigot, Single, 12674-HS, L.H., 12684-HS, R.H.  Page 25	12694-HS Hub & Spigot, Back-to-Back  Page 25	12704 No-Hub, Single, L.H. 2" Vent  Page 26	12704-HS Hub & Spigot, Single, L.H. 2" Vent  Page 26

VERTICAL ADJUSTABLE FITTINGS					
12704-LH4 No-Hub, Single, L.H. 4" Branch, L.H. 2" Vent  Page 26	12704-HS-HLH4 Hub & Spigot, Single, L.H. 4" Branch, L.H. 2" Vent  Page 27	12704-RH4 No-Hub, Single, R.H. 4" Branch, L.H. 2" Vent  Page 27	12704-HS-HRH4 Hub & Spigot, Single, R.H. 4" Branch, L.H. 2" Vent  Page 27	12704-D4 No-Hub, Single, Two 4" Branches, L.H. 2" Vent  Page 27	12704-HS-HD4 Hub & Spigot, Single, Two 4" Branches, L.H. 2" Vent  Page 27


VERTICAL ADJUSTABLE FITTINGS					
12714 No-Hub, Single, R.H. 2" Vent  Page 28	12714 -HS Hub & Spigot, Single, R.H. 2" Vent  Page 28	12714-RH4 No-Hub, Single, R.H. 4" Branch, R.H. 2" Vent  Page 28	12714-HS-HRH4 Hub & Spigot, Single, R.H. 4" Branch, R.H. 2" Vent  Page 29	12714-LH4 No-Hub, Single, L.H. 4" Branch, R.H. 2" Vent  Page 29	12714-HS-HLH4 Hub & Spigot, Single, L.H. 4" Branch, R.H. 2" Vent  Page 29

HORIZONTAL 4" NO-HUB, ADJUSTABLE, SINGLE


12674 & 12684

APPLICATION: For use with Siphon Jet or Blowout Closets in No-Hub piping systems where single adjustable fitting with horizontal flow is desired.

12674 Left-Hand (Shown)
12684 Right-Hand (Opposite)

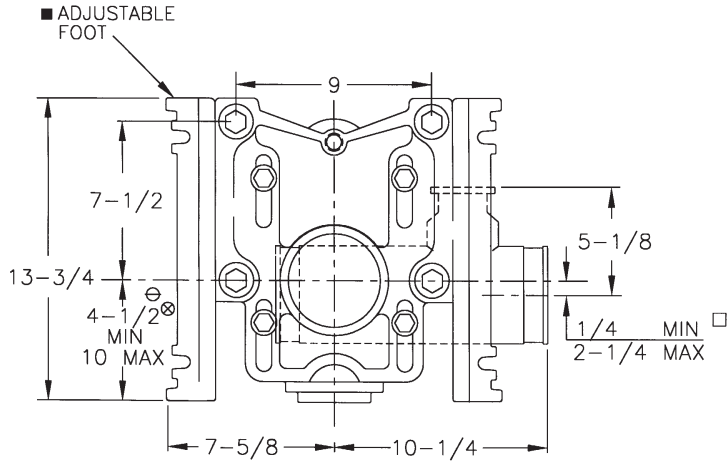

60 LBS.

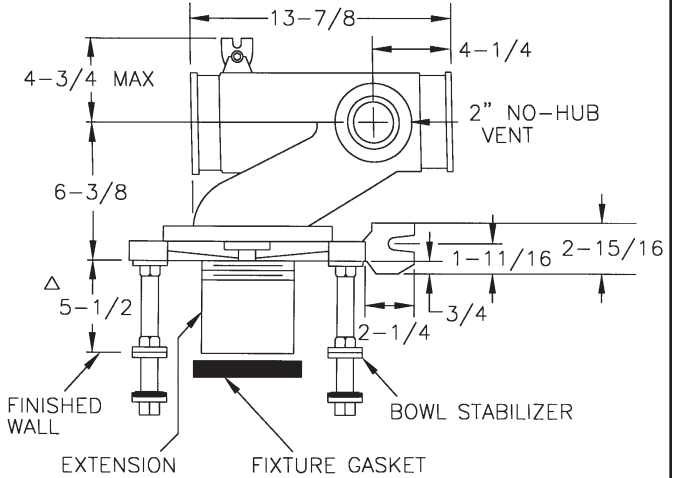


HORIZONTAL 4" NO-HUB, ADJUSTABLE, BACK-TO-BACK


12694

APPLICATION: For use with Siphon Jet or Blowout Closets in No-Hub piping systems where back-to-back adjustable fitting with horizontal flow is desired.

Back-to-Back

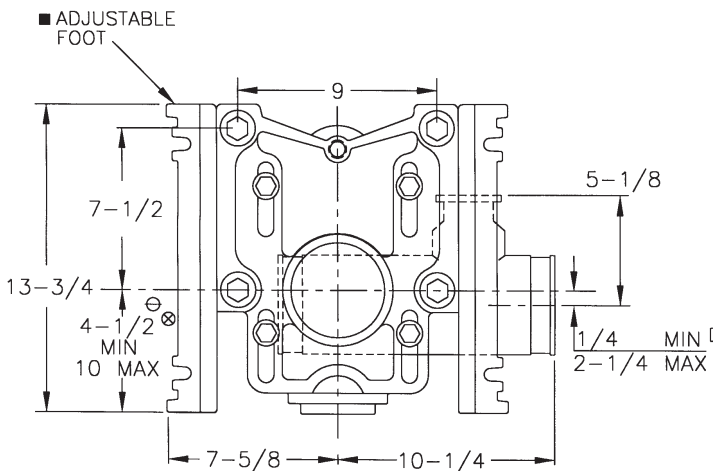

100 LBS.

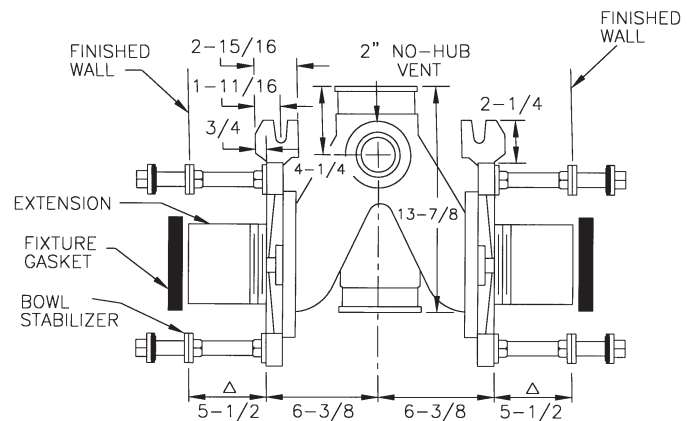

OPTIONS & NOTES

- | | | | |
|-------|--|-------|--|
| -PF | Pylon Foot, Std. | -10 | ABS Extension, through 10-1/2" Wall |
| -OR | O-Ring Carrier | -24 | Carrier for Floor-Mounted, Back-Outlet China Bowls |
| -SD | Special-Duty 500 lb. Carrier | -30 | Cast Iron Adjustable Extension with Connector |
| ▼ -HS | Hub & Spigot | -30-2 | Cast Iron Adjustable Extension with Connector and Test Cap |
| -AUX | Auxiliary Inlet, 2" | -32 | Carrier for Wide Chase Installations |
| -VP | Vandal-Proof Trim | -35 | Closet Carrier for Wheelchair High Rough |
| -1 | Positioning Frame | ▼ -58 | Horizontal No-Hub Cast Long Barrel |
| -6 | Supply Pipe Support (Specify Type of Pipe) | | |

■ RECOMMENDED ALL FEET BE SECURED TO FLOOR WITH 1/2" BOLTS AND ANCHORS BY OTHERS.

DIM. SHOWN IS FOR SIPHON JET. BLOWOUT IS: ⊕ 11" MIN. & 16-1/2" MAX. □ 2" MIN. & 4" MAX.

⊗ FOR ROUGHING OVER 6" FOR SIPHON JET OR 12-1/2" FOR BLOWOUT, SPECIFY ON ORDER.

△ FOR DIM. SHORTER THAN 5-1/2" (1" MIN.) CUT EXT. SPECIFY -10 FOR LONGER EXT. (10-1/2" MAX.)