

MANUAL CLEANING

60100H
On-Floor Type



Page 211

60100H-EXT
Extended Top



Page 212

60100H-ET
Enclosed Top



Page 212

60100H-RT
Recessed Type



Page 213

MANUAL CLEANING

60115A/60117A
Low-Boy



Page 216

60210A
High Volume



Page 217

60210A-EXT
High Volume, Extended Top



Page 218

SEMI-AUTOMATIC CLEANING

60100-SA
On-Floor Type



Page 214

60100-SA-ET
Enclosed Type



Page 215

60100-SA-RT
Recessed Type



Page 215

60115-SA
Low Boy



Page 216

AUTOMATIC

60300A
GI-2000A Fully Electronic
SS Interceptor



Page 219

ELECTRONIC GREASE/OIL LEVEL DETECTORS

60100H-GRD
Grease Removal Device



Page 211

EGOLD-1000
Monitoring Device for
Interceptors Inside Building



Page 220

CEGOLD-2000
Monitoring Device for
Interceptors Outside Building



Page 220

SAP
Sensing & Alarm Probe



Page 217

60100H SERIES

MANUAL CLEANING, ON-FLOOR TYPE

APPLICATION

For use in restaurant and institutional kitchens and all types of food handling and processing areas where waste water contains fats, oil and grease (FOG). Adequate space and head room for removal of cover must be available for manual cleaning.

SPECIFICATION

JOSAM 60100H Series epoxy coated fabricated steel Grease Interceptor, no-hub connections, internal trap, removable diffuser baffle, gasketed non-skid cover, flow control fitting and PDI Seal of Approval. Conforms to Plumbing & Drainage Institute Standard PDI-G101.





Conforms to Plumbing and Drainage Institute Standard PDI-G101.

Available Options

-40	Cover Recess for Floor Finish	-HD	Heavy-Duty Cover
-61	Flange and Clamp Device	-SS	Stainless Steel Interceptor
* -ISI	Integrated Solids Interceptor	▼ -GRD*	Grease Removal Device, 60104H-60110H
▼ -EXT	Extension, 6" Standard. (Specify Extension Height)	† -GRDP	Grease Recovery Device with Probe
▼ -RT	Recessed Type	-SAP	Sensing and Alarm Probe
▼ -ET	Enclosed Type		

* -ISI and -GRD cannot be furnished together. † 60100H-GRDP meets ANSI A112.14.4

TYPE NO.	FLOW RATE GPM	GREASE CAP LBS.	PIPE SIZE	ROUGH-IN CENTERS		LGTH. E	WIDTH F	HGT. G	LBS.
				C	D				
60102H	7	14	2	8-1/4	3-3/8	14-7/8	13	11-5/8	35
60103H	10	20	2	8-1/2	3-3/8	16-5/8	14-1/2	11-7/8	45
60104H	15	30	2	9-1/2	3-3/8	20-3/8	17	12-7/8	60
60105H	20	40	3	12	4-7/8	20-7/8	19	16-7/8	70
60106H	25	50	3	13	4-7/8	23-3/8	21-1/2	17-7/8	90
60107H	35	70	3	14-1/2	4-7/8	26-1/8	23	19-3/8	110
60108H	50	100	3	16-1/2	4-7/8	27-7/8	25-1/2	21-3/8	135
60109H	75	150	3	21	6	41	31	27	220
60110H	100	200	4	23	8	47	35	31	325

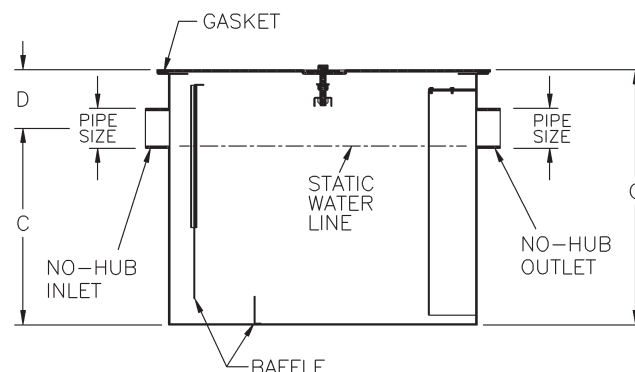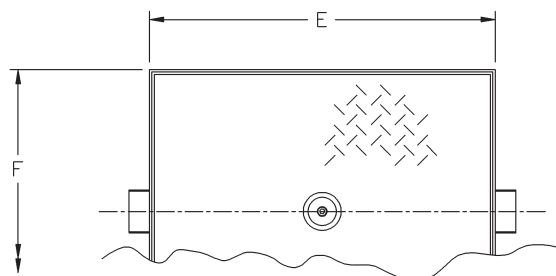

INTERCEPTORS

60100H-GRD SERIES

with Grease Removal Device

APPLICATION


For use in restaurant and institutional kitchens and all types of food handling and processing areas where waste water contains fats, oil and grease (FOG). The Grease Removal Device (GRD), with programmable timer, controls the internal pump to remove grease on schedule.

SPECIFICATION

JOSAM 60100H-GRD Series epoxy coated fabricated steel Grease Interceptor, no-hub connections, internal trap, removable baffle, gasketed non-skid cover, flow control fitting and PDI Seal of Approval. Programmable timer controls internal pump for removal of grease at predetermined intervals.

OPTION N/A:

-ISI

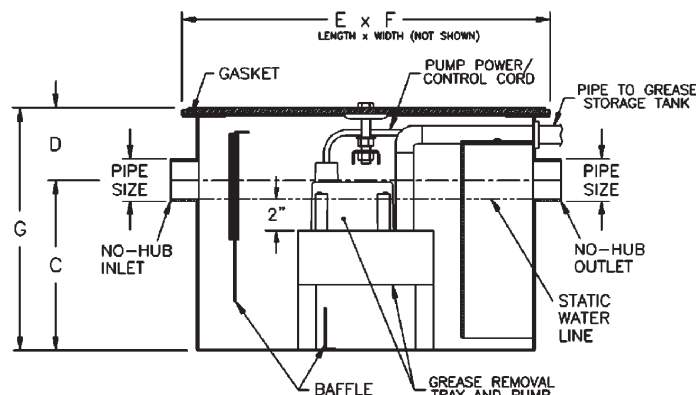

TYPE NO.	FLOW RATE GPM	GREASE CAP LBS.	PIPE SIZE	ROUGH-IN CENTERS		LGTH. E	WIDTH F	HGT. G	LBS.
				C	D				
60104H-GRD	15	30	2	9-1/2	3-3/8	20-3/8	17	12-7/8	90
60105H-GRD	20	40	3	12	4-7/8	20-7/8	19	16-7/8	100
60106H-GRD	25	50	3	13	4-7/8	23-3/8	21-1/2	17-7/8	120
60107H-GRD	35	70	3	14-1/2	4-7/8	26-1/8	23	19-3/8	140
60108H-GRD	50	100	3	16-1/2	4-7/8	27-7/8	25-1/2	21-3/8	165
60109H-GRD	75	150	3	21	6	41	31	27	250
60110H-GRD	100	200	4	23	8	47	35	31	355