

OIL SEPARATORS

60500B

Gravity-Type Draw-Off



Page 225

60500B-EXT

Extended Top, Draw-Off Type



Page 225

60500-EST

with External Storage Tank



Page 226

OIL SEPARATORS

60610A

High Volume, Draw-Off Type



Page 227

60610A-EXT

High Volume, Extended Top, Draw-Off Type



Page 227

60610-EST

High Volume with External Storage Tank



Page 228 (EST NOT SHOWN)

SOLIDS INTERCEPTORS

61000

Barber Shop Type, Bottom Access



Page 229

61030

Jewelry Shop Type, Top Access



Page 229

61040A

18" x 18" Top Access



Page 230

61070

10-1/2" Top

Top Access



Pages 230, 231

61080

16-1/2" Top

OIL/SEDIMENT

60810



Page 229

LINT INTERCEPTOR

61800

Galvanized Steel Bucket



Page 232

60810 SERIES

OIL SEDIMENT INTERCEPTOR


APPLICATION

For use in service stations, parking garages, car and truck washes and industrial plants where discharged water contains oil, sediment and other volatile liquids. Sediment and debris are collected in the sediment pan and removable bucket, which are accessible by removing the top grate. Oil and grease are trapped in the unit and may be skimmed off periodically.

SPECIFICATION

JOSAM 60810 Series steel Oil Sediment Interceptor with acid-resisting coating, threaded connection, flat bottom, visible double wall trap, removable sediment bucket, primary and secondary screens and medium-duty cast iron grate(s).

SLOT WIDTH 1/2"

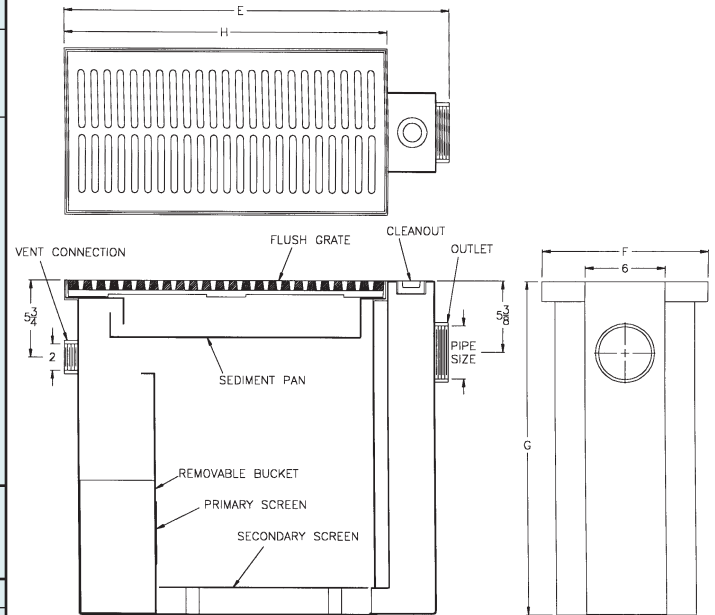

TYPE NO.	PIPE SIZE	GRATE FREE AREA (SQ. IN.)	NO. OF GRATES	SLUDGE CAP (LBS.)	E	F	G	H	LBS.
60816	2	54	1	12	17-1/2	12-1/8	15	12-1/8	60
60817	4	112	1	60	29-7/8	12-1/2	25	24-1/2	175
60818	4	224	2	100	29-7/8	24-1/2	25	24-1/2	280
60819	4	336	3	200	41-7/8	24-1/2	35	36-1/2	360