

SQUARE • ARE TOPS					
49300 8" Top, 6" Deep Body 49300-LF Less Flange	49320A 12" Top, 6" Deep Body 49320A-LF Less Flange	49340A 12" Top, 8" Deep Body 49340A-LF Less Flange.	49360A 12" Top, 10" Deep Body 49360A-LF Less Flange	49400 16" Top, 6" Deep Body 49400-LF Less Flange	49420 16" Top, 12" Deep Body 49420-LF Less Flange
					
Page 162	Page 164	Page 166	Page 168	Page 170	Page 172

SQUARE • NICKEL BRONZE TOPS					
49300-NB 8" Top, 6" Deep Body 49300-LF-NB Less Flange	49320A-NB 12" Top, 6" Deep Body 49320A-LF-NB Less Flange	49340A-NB 12" Top, 8" Deep Body 49340A-LF-NB Less Flange	49360A-NB 12" Top, 10" Deep Body 49360A-LF-NB Less Flange	49400-NB 16" Top, 6" Deep Body 49400-LF-NB Less Flange	49420-NB 16" Top, 12" Deep Body 49420-LF-NB Less Flange
					
Page 163	Page 165	Page 167	Page 169	Page 171	Page 173

ROUND • ARE TOPS			ROUND • NICKEL BRONZE TOPS		
49500 8" Top, 3" Deep Body 49500-LF Less Flange	49520A 8" Top, 6" Deep Body 49520A-LF Less Flange	49580A 12" Top, 8" Deep Body 49580A-LF Less Flange	49500-NB 8" Top, 3" Deep Body 49500-LF-NB Less Flange	49520A-NB 8" Top, 6" Deep Body 49520A-LF-NB Less Flange	49580A-NB 12" Top, 8" Deep Body 49580A-LF-NB Less Flange
					
Page 174	Page 176	Page 178	Page 175	Page 177	Page 179

RECTANGULAR				CAN WASH DRAINS	
49700 4" x 8" Top, 4" Deep Body 49700-LF Less Flange	49700-NB 4" x 8" Top, 4" Deep Body 49700-LF-NB Less Flange	49720 6" x 12" Top, 7" Deep Body 49720-LF Less Flange	49720-NB 6" x 12" Top, 7" Deep Body 49720-LF-NB Less Flange	49850 12" Top Flushing Rim Hinged Grate	49870A 12" Top 8" Deep Body Spray Nozzle Assembly
					
Page 180	Page 181	Page 182	Page 183	Page 184	Page 184

49320A SERIES			12" SQUARE TOP, 6" DEEP	
APPLICATION			SLOT WIDTH 3/8"	
For use in non-traffic areas where ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 9" square grate and medium sump accept moderate flow and the dome strainer intercepts debris which could block the drain line. Double drainage flange serves as an anchor in the sub-floor and redirects secondary moisture to the waste line. It may also be used with a clamp device to assure a bond between the drain and the flashing or waterproof membrane.				
SPECIFICATION				
JOSAM 49320A Series square cast iron 5-7/8" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, double drainage flange with weepholes, bottom outlet, aluminum internal dome strainer and cast iron, non-traffic, acid-resisting, anti-tilting grate.			X (2" - 3") = 2-1/2" X (4" - 6") = 2-3/4" Y (2" - 4") = 2" Z (2" - 4") = 2-1/16" GRATE FREE AREA 26 SQ. IN. FOR OUTLET TYPE, SPECIFY -X, -Y or -Z.	
For Options, See Below				
OPTIONS N/A: -VP, -8, -20, -24				
TYPE NO.	PIPE SIZE	LBS.		
49322A	2	45		
49323A	3	45		
49324A	4	45		
49326A	6	45		
49320A-LF SERIES			Less Flange	
APPLICATION			SLOT WIDTH 3/8"	
For use in non-traffic areas where ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 9" square grate and medium sump accept moderate flow and the dome strainer intercepts debris which could block the drain line.				
SPECIFICATION				
JOSAM 49320A-LF Series square cast iron 5-7/8" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, bottom outlet, aluminum internal dome strainer and cast iron, non-traffic, acid-resisting, anti-tilting grate.			X (2" - 3") = 2-1/2" X (4") = 2-3/4" Y (2" - 4") = 2" Z (2" - 4") = 2-1/16" GRATE FREE AREA 26 SQ. IN. FOR OUTLET TYPE, SPECIFY -X, -Y or -Z.	
OPTIONS N/A: -VP, -8, -20, -24, -C				
TYPE NO.	PIPE SIZE	LBS.		
49322A-LF	2	28		
49323A-LF	3	28		
49324A-LF	4	28		
49326A-LF	6	28		
OPTIONS				
▼ -LF	Less Flange		-31	Sediment Bucket (Aluminum)
▼ -NB	Nickel Bronze Traffic Top		-33	Sediment Bucket (A.R. Finish)
-LG	Less Grate		▽ -35	Stainless Steel Mesh Bucket Liner
-3	1/2 Grate		-43	Internal Dome Strainer (A.R. Finish)
-4	3/4 Grate		-45	Less Internal Dome Strainer
-5	Nikaloy Extra Heavy-Duty Grate & Rim (Not SUPER-FLO® Design)		-55	1/2" Primer Adaptor, 88450 Provided for 2" - 4"
-7	Full Grate with 2-1/2" Center Opening			1/2" Primer Tap, 6"
-8	Stainless Steel Depressed Grate, NB		-C	Clamp Device, 49320A, 49320A-NB
-VP	Secured Grate, Vandal-Proof Screws, NB			
-15	Stainless Steel Rim and Grate, NB		OUTLETS	
-16	Grate with 4" Round Funnel		-X	Inside Caulk Outlet
-17	Grate with 6" Round Funnel		-Y	Hub Outlet with Gasket, 2" - 4"
-18	Grate with 9" x 3-1/2" Oval Funnel		-Z	No-Hub Outlet
-20	Solid Nikaloy Cover, NB			
-24	Chained Grate, NB			▽ Specify -31 or -33 Bucket

49320A-NB SERIES

with -NB Nikaloy Traffic Top

APPLICATION


For use in areas where pedestrian and medium weight wheel loads are anticipated and ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 10" square grate and medium sump accept moderate flow and the dome strainer intercepts debris which could block the drain line. Double drainage flange serves as an anchor in the sub-floor and redirects secondary moisture to the waste line. It may also be used with a clamp device to assure a bond between the drain and the flashing or waterproof membrane.

SPECIFICATION

JOSAM 49320A-NB Series square cast iron 6-1/4" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, double drainage flange with weepholes, bottom outlet, aluminum internal dome strainer, Nikaloy sanitary sloped rim and Nikaloy light-duty, anti-tilting, SUPER-FLO® Grate.

TYPE NO.	PIPE SIZE	LBS.
49322A-NB	2	45
49323A-NB	3	45
49324A-NB	4	45
49326A-NB	6	45

SLOT WIDTH 1/2"

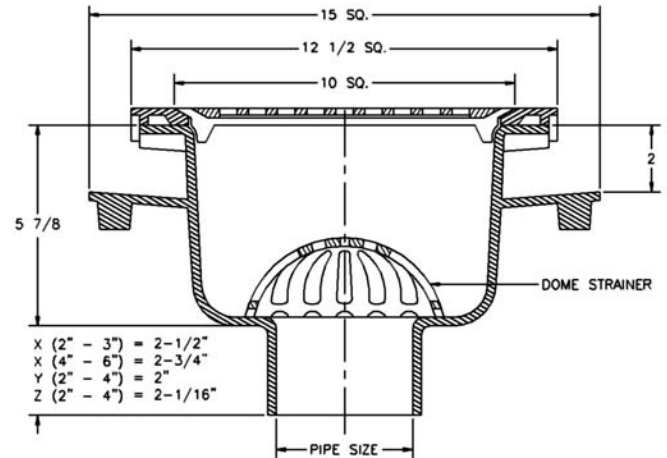

GRATE FREE AREA 35 SQ. IN.

FOR OUTLET TYPE, SPECIFY -X, -Y or -Z.

49320A-LF-NB SERIES

Less Flange, with -NB Nikaloy Traffic Top

APPLICATION

For use in areas where pedestrian and medium weight wheel loads are anticipated and ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 10" square grate and medium sump accept moderate flow and the dome strainer intercepts debris which could block the drain line.


SPECIFICATION

JOSAM 49320A-LF-NB Series square cast iron 6-1/4" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, bottom outlet, aluminum internal dome strainer, Nikaloy sanitary sloped rim and Nikaloy light-duty, anti-tilting, SUPER-FLO® Grate.

OPTION N/A: -C

TYPE NO.	PIPE SIZE	LBS.
49322A-LF-NB	2	28
49323A-LF-NB	3	28
49324A-LF-NB	4	28
49326A-LF-NB	6	28

SLOT WIDTH 1/2"

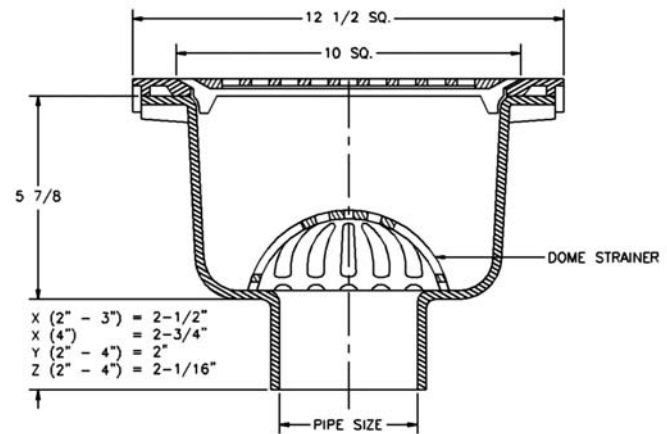

GRATE FREE AREA 35 SQ. IN.

FOR OUTLET TYPE, SPECIFY -X, -Y or -Z.