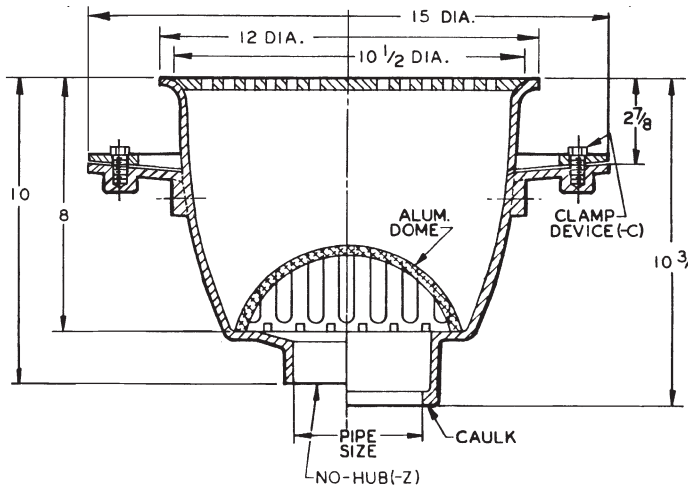
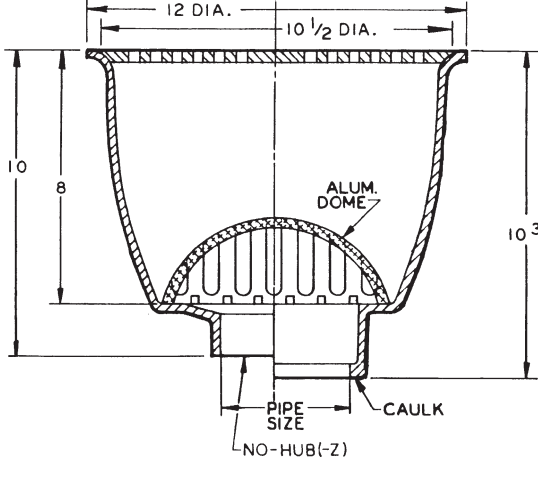


SQUARE • ARE TOPS					
49300 8" Top, 6" Deep Body 49300-LF Less Flange	49320A 12" Top, 6" Deep Body 49320A-LF Less Flange	49340A 12" Top, 8" Deep Body 49340A-LF Less Flange.	49360A 12" Top, 10" Deep Body 49360A-LF Less Flange	49400 16" Top, 6" Deep Body 49400-LF Less Flange	49420 16" Top, 12" Deep Body 49420-LF Less Flange
					
Page 162	Page 164	Page 166	Page 168	Page 170	Page 172

SQUARE • NICKEL BRONZE TOPS					
49300-NB 8" Top, 6" Deep Body 49300-LF-NB Less Flange	49320A-NB 12" Top, 6" Deep Body 49320A-LF-NB Less Flange	49340A-NB 12" Top, 8" Deep Body 49340A-LF-NB Less Flange	49360A-NB 12" Top, 10" Deep Body 49360A-LF-NB Less Flange	49400-NB 16" Top, 6" Deep Body 49400-LF-NB Less Flange	49420-NB 16" Top, 12" Deep Body 49420-LF-NB Less Flange
					
Page 163	Page 165	Page 167	Page 169	Page 171	Page 173

ROUND • ARE TOPS			ROUND • NICKEL BRONZE TOPS		
49500 8" Top, 3" Deep Body 49500-LF Less Flange	49520A 8" Top, 6" Deep Body 49520A-LF Less Flange	49580A 12" Top, 8" Deep Body 49580A-LF Less Flange	49500-NB 8" Top, 3" Deep Body 49500-LF-NB Less Flange	49520A-NB 8" Top, 6" Deep Body 49520A-LF-NB Less Flange	49580A-NB 12" Top, 8" Deep Body 49580A-LF-NB Less Flange
					
Page 174	Page 176	Page 178	Page 175	Page 177	Page 179

RECTANGULAR				CAN WASH DRAINS	
49700 4" x 8" Top, 4" Deep Body 49700-LF Less Flange	49700-NB 4" x 8" Top, 4" Deep Body 49700-LF-NB Less Flange	49720 6" x 12" Top, 7" Deep Body 49720-LF Less Flange	49720-NB 6" x 12" Top, 7" Deep Body 49720-LF-NB Less Flange	49850 12" Top Flushing Rim Hinged Grate	49870A 12" Top 8" Deep Body Spray Nozzle Assembly
					
Page 180	Page 181	Page 182	Page 183	Page 184	Page 184

49580A SERIES			SUPER-FLO® 12" ROUND TOP, 8" DEEP		
APPLICATION			SLOT WIDTH 3/4"		
For use in areas where pedestrian and medium weight wheel loads are anticipated and ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 10-1/2" diameter grate and deep sump accept heavy flow and the dome strainer intercepts debris which could block the drain line. Double drainage flange serves as an anchor in the sub-floor and redirects secondary moisture to the waste line. It may also be used with a clamp device to assure a bond between the drain and the flashing or waterproof membrane.					
SPECIFICATION			GRATE FREE AREA 19.7 SQ. IN.		
JOSAM 49580A Series round cast iron 8" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, double drainage flange with weepholes, bottom outlet, aluminum internal dome strainer, cast iron, non-traffic, acid-resisting, anti-tilting, SUPER-FLO® Grate.			FOR OUTLET TYPE, SPECIFY -X or -Z.		
For Options, See Below					
OPTIONS N/A: -VP, -8					
TYPE NO.	PIPE SIZE	LBS.			
49582A	2	45			
49583A	3	46			
49584A	4	47			
49580A-LF SERIES			Less Flange		
APPLICATION			SLOT WIDTH 3/4"		
For use in areas where pedestrian and medium weight wheel loads are anticipated and ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 10-1/2" diameter grate and deep sump accept heavy flow and the dome strainer intercepts debris which could block the drain line.					
SPECIFICATION			GRATE FREE AREA 19.7 SQ. IN.		
JOSAM 49580A-LF Series round cast iron 8" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, bottom outlet, aluminum internal dome strainer, cast iron, non-traffic, acid-resisting, anti-tilting, SUPER-FLO® Grate.			FOR OUTLET TYPE, SPECIFY -X or -Z.		
OPTIONS N/A: -VP, -C, -8					
TYPE NO.	PIPE SIZE	LBS.			
49582A-LF	2	37			
49583A-LF	3	38			
49584A-LF	4	39			
OPTIONS					
▼ -LF	Less Flange	▼ -35	Stainless Steel Mesh Bucket Liner		
▼ -NB	Nickel Bronze Traffic To	-43	Internal Dome Strainer (A.R. Finish)		
-LG	Less Grate	-45	Less Internal Dome Strainer		
-3	1/2 Grate	-51	Galvanized Cast Iron Inside and Outside		
-4	3/4 Grate	-52	Painted Inside and Outside		
-7	Full Grate with 2-1/2" Center Opening	-55	1/2" Primer Adapter, 88450 Provided		
-8	Depressed Grate, (Aluminum), NB	-C	Clamp Device, 49580A, 49580A-NB		
-VP	Secured Grate, Vandal-Proof Screws, NB				
-16	Grate with 4" Round Funnel				
-17	Grate with 6" Round Funne				
-18	Grate with 9" x 3-1/2" Oval Funnel				
-31	Sediment Bucket (Aluminum)				
-33	Sediment Bucket (A.R. Finish)				
			OUTLETS		
			-X	Inside Caulk Outlet	
			-Z	No-Hub Outlet	
			▼ Specify -31 or -33 Bucket		

49580A-NB SERIES

with -NB Nikaloy Traffic Top

APPLICATION


For use in areas where pedestrian and medium weight wheel loads are anticipated and ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 11-1/8" diameter grate and deep sump accept heavy flow and the dome strainer intercepts debris which could block the drain line. Double drainage flange serves as an anchor in the sub-floor and redirects secondary moisture to the waste line. It may also be used with a clamp device to assure a bond between the drain and the flashing or waterproof membrane.

SPECIFICATION

JOSAM 49580A-NB Series round cast iron 8-1/4" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, double drainage flange with weepholes, bottom outlet, aluminum internal dome strainer, Nikaloy sanitary sloped rim and Nikaloy, light-duty, anti-tilting, SUPER-FLO® Grate.

TYPE NO.	PIPE SIZE	LBS.
49582A-NB	2	50
49583A-NB	3	51
49584A-NB	4	52

SLOT WIDTH 1/2"

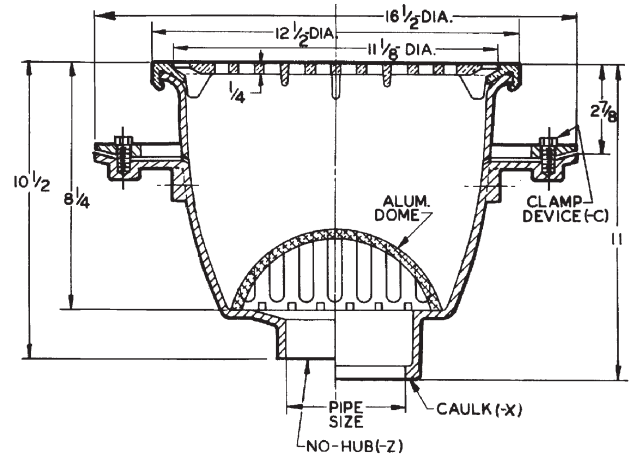

GRATE FREE AREA 40 SQ. IN.

FOR OUTLET TYPE, SPECIFY -X or -Z.

49580A-LF-NB SERIES

Less Flange, with -NB Nikaloy Traffic Top

APPLICATION

For use in areas where pedestrian and medium weight wheel loads are anticipated and ultimate sanitation is desired, such as kitchens, hospitals and food processing plants. The 11-1/8" diameter grate and deep sump accept heavy flow and the dome strainer intercepts debris which could block the drain line.


SPECIFICATION

JOSAM 49580A-LF-NB Series round cast iron 8-1/4" deep SUPER-FLO-SEPTOR® Floor Sink with acid-resisting interior, bottom outlet, aluminum internal dome strainer, Nikaloy sanitary sloped rim and Nikaloy, light-duty, anti-tilting, SUPER-FLO® Grate.

OPTION N/A: -C

TYPE NO.	PIPE SIZE	LBS.
49582A-LF-NB	2	43
49583A-LF-NB	3	43
49584A-LF-NB	4	44

SLOT WIDTH 1/2"

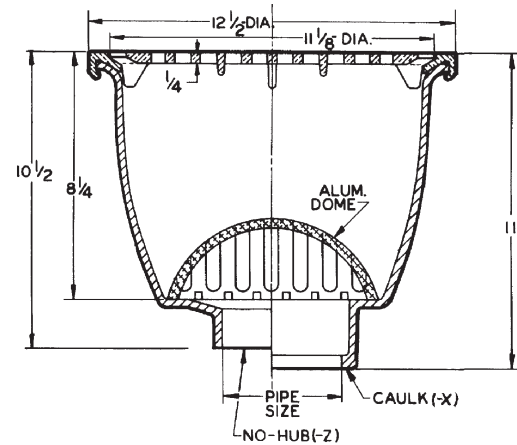

GRATE FREE AREA 40 SQ. IN.

FOR OUTLET TYPE, SPECIFY -X or -Z.