
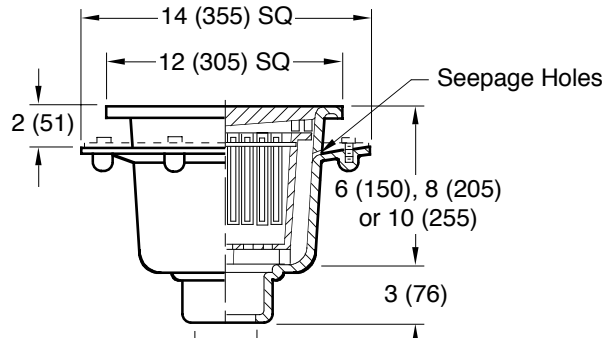


K	DRAWING NUMBER S3420	SIZE A	SCALE: NONE	DATE: 9-19-85	APPROVED BY: JD	CHECKED BY: JD	DRAWN BY: CM	FIGURE NUMBER	SMITH® JAY R. SMITH MFG. CO.® MEMBER OF MORRIS GROUP INTERNATIONAL POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com  CUSTOMER DRIVEN SINCE 1928	LOCATION																																									
									SANI-CEPTOR® ACID RESISTANT COATED FLOOR & INDIRECT WASTE DRAINS A.R. COATED NON-TRAFFIC TOPS 12" (305) SQUARE TOP - MEDIUM, DEEP, EXTRA DEEP RECEPTORS FUNCTION: Used in kitchens, hospitals, food markets, restaurants, schools and all types of food handling areas not subject to foot or other traffic. The deeper receptors are particularly useful for indirect waste applications or for handling a large volume of waste water.																																										
									 Free Area 40 SQ IN (258) SQ CM Seepage Holes 2 (51) 14 (355) SQ 12 (305) SQ 6 (150), 8 (205) or 10 (255) 3 (76) A (Pipe Size) = 02(50), 03(75) or 04(100)																																										
									WITH DOME BOTTOM STRAINER WITH SEDIMENT BUCKET																																										
									6" (150) deep 8" (205) deep 10" (255) deep Fig. ... 3420C ... 3430C ... 3440C ... CAULK OUTLET ... Fig. ... 3421C ... 3431C ... 3441C Fig. ... 3420Y ... 3430Y ... 3440Y ... NO-HUB OUTLET ... Fig. ... 3421Y ... 3431Y ... 3441Y																																										
FEATURES, OPTIONS & ORDERING INFORMATION REGULARLY FURNISHED: Cast Iron Flanged Receptor with Seepage Holes, Acid Resistant Coated Interior, and Loose Set Acid Resistant Coated Cast Iron Grate. Aluminum Dome Bottom Strainer or White ABS Sediment Bucket as Indicated by Figure Number. VARIATIONS: ☐ Aluminum Flat Bottom Strainer -FBS ☐ Flashing Clamp -C ☐ Less Flange (Specify Fig. *3425, *3426, 3435, 3436, *3445, *3446) ☐ Polished Aluminum Dome Bottom Strainer -PDBS ☐ L Speedi-Set Service Weight ☐ LXH Speedi-Set Extra Heavy OPTIONAL MATERIALS: ☐ All Duco Cast Iron Receptor and Grate -CI ☐ All Galvanized Receptor and Grate -G NOTE: This grate is not recommended for any type of traffic including pedestrian traffic. NOTE: Dimensions shown in parentheses are in millimeters. *CONTACT SMITH ENGINEERING																																																			
OPTIONAL TOP GRATES AND COVERS FOR INDIRECT WASTE APPLICATIONS <table><thead><tr><th>SUFFIX</th><th>NUMBER</th><th>DESCRIPTION</th></tr></thead><tbody><tr><td>☐</td><td>-10</td><td>Less A.R.C. Grate</td></tr><tr><td>☐</td><td>-12</td><td>With A.R.C. 1/2 Grate</td></tr><tr><td>☐</td><td>-13</td><td>With A.R.C. 3/4 Grate</td></tr><tr><td>☐</td><td>-14</td><td>With A.R.C. Grate with 2 1/2" (64) DIA Center Hole</td></tr><tr><td>☐</td><td>-15</td><td>With NB Rim and Aluminum Recessed Grate</td></tr><tr><td>☐</td><td>-21</td><td>With A.R.C. Grate and 4" (100) DIA A.R.C. Funnel</td></tr><tr><td>☐</td><td>-22</td><td>With A.R.C. Grate and 6" (150) DIA A.R.C. Funnel</td></tr><tr><td>☐</td><td>-25</td><td>With A.R.C. Grate and 8 1/4(210) x 3 1/4(83) x 4 1/2"(115) High Oval A.R.C. Funnel</td></tr><tr><td>☐</td><td>-26</td><td>With A.R.C. Grate and 6(150) x 2 1/2(64) x 1"(25) High Oval A.R.C. Funnel</td></tr><tr><td>☐</td><td>-41</td><td>With A.R.C. Solid Cover</td></tr><tr><td>☐</td><td>-42</td><td>With A.R.C. 1/2 Solid Cover</td></tr><tr><td>☐</td><td>-43</td><td>With A.R.C. 3/4 Solid Cover</td></tr><tr><td>☐</td><td>-44</td><td>With A.R.C. Solid Cover with 2 1/2" (64) DIA Center Hole</td></tr></tbody></table>										SUFFIX	NUMBER	DESCRIPTION	☐	-10	Less A.R.C. Grate	☐	-12	With A.R.C. 1/2 Grate	☐	-13	With A.R.C. 3/4 Grate	☐	-14	With A.R.C. Grate with 2 1/2" (64) DIA Center Hole	☐	-15	With NB Rim and Aluminum Recessed Grate	☐	-21	With A.R.C. Grate and 4" (100) DIA A.R.C. Funnel	☐	-22	With A.R.C. Grate and 6" (150) DIA A.R.C. Funnel	☐	-25	With A.R.C. Grate and 8 1/4(210) x 3 1/4(83) x 4 1/2"(115) High Oval A.R.C. Funnel	☐	-26	With A.R.C. Grate and 6(150) x 2 1/2(64) x 1"(25) High Oval A.R.C. Funnel	☐	-41	With A.R.C. Solid Cover	☐	-42	With A.R.C. 1/2 Solid Cover	☐	-43	With A.R.C. 3/4 Solid Cover	☐	-44	With A.R.C. Solid Cover with 2 1/2" (64) DIA Center Hole
SUFFIX	NUMBER	DESCRIPTION																																																	
☐	-10	Less A.R.C. Grate																																																	
☐	-12	With A.R.C. 1/2 Grate																																																	
☐	-13	With A.R.C. 3/4 Grate																																																	
☐	-14	With A.R.C. Grate with 2 1/2" (64) DIA Center Hole																																																	
☐	-15	With NB Rim and Aluminum Recessed Grate																																																	
☐	-21	With A.R.C. Grate and 4" (100) DIA A.R.C. Funnel																																																	
☐	-22	With A.R.C. Grate and 6" (150) DIA A.R.C. Funnel																																																	
☐	-25	With A.R.C. Grate and 8 1/4(210) x 3 1/4(83) x 4 1/2"(115) High Oval A.R.C. Funnel																																																	
☐	-26	With A.R.C. Grate and 6(150) x 2 1/2(64) x 1"(25) High Oval A.R.C. Funnel																																																	
☐	-41	With A.R.C. Solid Cover																																																	
☐	-42	With A.R.C. 1/2 Solid Cover																																																	
☐	-43	With A.R.C. 3/4 Solid Cover																																																	
☐	-44	With A.R.C. Solid Cover with 2 1/2" (64) DIA Center Hole																																																	
K J H G	8-4-14 6-10-14 6-9-08 12-3-98	Revised Variations Revised Reg. Furn., Var. Revised Free Area Added Note	TBW TBW RN CMD	CL TWK CL CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 3420-3441 Series																																												
REV.	DATE	DESCRIPTION	BY	CKD. BY																																															

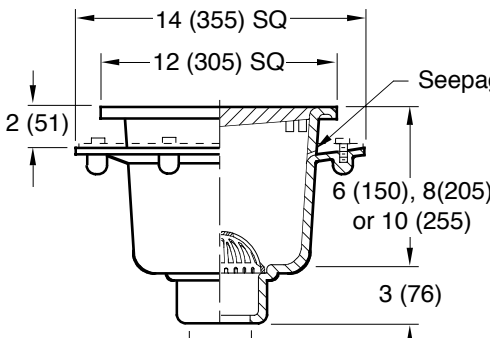

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov