

SPECIFICATION:

JOSAM 32160 SERIES COATED CAST IRON FLOOR DRAIN WITH DOUBLE DRAINAGE FLANGE, WEJLOC COLLAR, WEEP-HOLES, BOTTOM OUTLET, INSIDE CAULK CONNECTION, ROUND TOP AND HEAVY-DUTY LOOSE-SET TRACTOR GRATE.



FLOOR DRAIN

9" ROUND TRACTOR TOP

SERIES

32160

SLOT WIDTH 3/8"

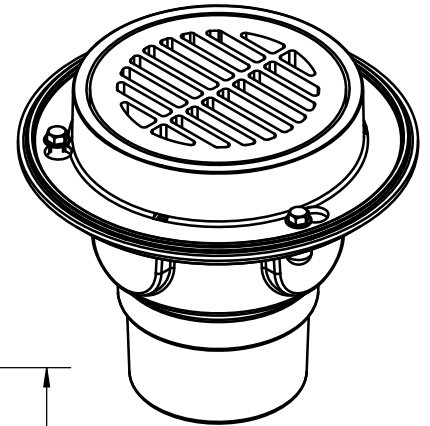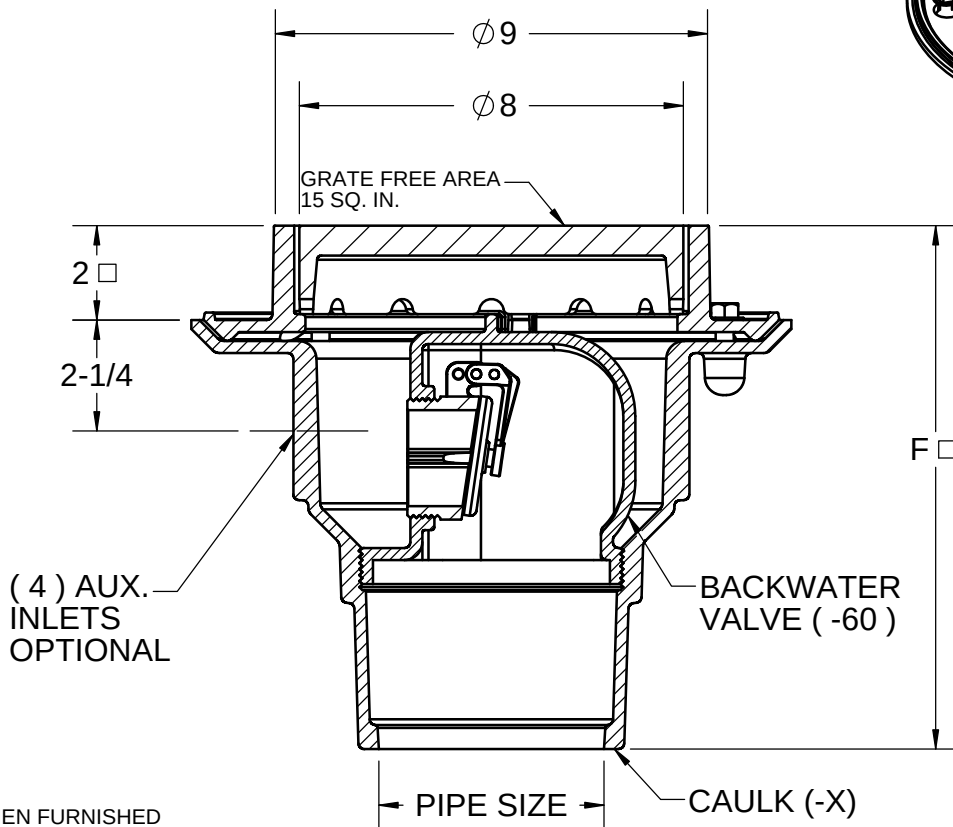

▲ CANNOT BE INSTALLED WITH (-60) BACKWATER VALVE OPTION

3"	PIPE SIZE ("F" DIM. = 10 - 7/8")	-54-92	2" AUXILIARY SPIGOT INLET, GALVANIZED
4"	PIPE SIZE ("F" DIM. = 11 - 1/4")	-60	BACKWATER VALVE
		▲ -62	"T"-HANDLE BRONZE CLOSURE PLUG
-7	DUCTILE IRON GRATE	-66	NO-HUB SIDE OUTLET
-12	SQUARE TOP, CAST IRON	▲ -71	SOLID CAST IRON BUCKET
-15	CHAINED GRATE	▲ -81	SLOTTED CAST IRON BUCKET
-19	CAST IRON UNDERGRATE W/SATINFINISH NIKALOY TOP	▲ -88	SUPPLEMENTARY STRAINER
-44	FIXED EXTENSION COLLAR (3" STD. OR SPECIFY HT.)	-92	GALVANIZED CAST IRON PARTS
-49	3/4" PRIMER TAP		
-50	1/2" PRIMER TAP	-ARE	ACID-RESISTING EPOXY
-51	1-1/2" AUXILIARY THREADED INLET	-92	GALVANIZED CAST IRON PARTS
-52	2" AUXILIARY THREADED INLET	-ARE	ACID RESISTANT EPOXY COATING
-53	2" AUXILIARY HUB INLET	-VP	SECURED GRATE, VANDAL-PROFF SCREWS
-54	2" AUXILIARY SPIGOT INLET		
-53-92	2" AUXILIARY HUB INLET, GALVANIZED	X -X	INSIDE CAULK OUTLET

DATE OF LAST CHANGE: 1/22/2018

DIMENSIONS ARE SUBJECT TO MANUFACTURERS
TOLERANCES AND CHANGE WITHOUT NOTICE.
WE CAN ASSUME NO RESPONSIBILITY FOR
USE OF SUPERSEDED OR VOID DATA.

JOSAM COMPANY
MICHIGAN CITY, INDIANA

NOTES