

ACADEMIC ART ROOM SINK TOP

SPDT-6130-42 ART ROOM STAINLESS STEEL COUNTER WITH BACKSLASH


Seamless welded construction. Top of 16 gauge type 304 stainless steel. Bowl of 18 gauge type 304 stainless steel. Wide wood frame for cabinet mounting. Top and bowls to have a non-porous Hand-Blended Just

Finish. Fully coated underside insulates for sound, and reduces condensation. Straight-sided compartment with 1-1/2" radius corners provides greater capacity. Drain punch #35 centered for Just J-35.

Includes: JS-47-TGSA gooseneck faucet, high impact resistant ABS Soap dispenser with 40 fl. oz. capacity, satin finish stainless steel C-fold paper towel dispenser to hold 200 paper towels, and J-35-FS drain.



**NEW
PRODUCT GROUP!**



 Available as ADA compliant. Specify as ADA 4-1/2 to 6-1/2 depth and note drain location.

COMMERCIAL GRADE FAUCETS

JSL-46-AC or B Sensor Operated Faucet with Control Module

 **AB 1953 Compliant**

Sensor-operated backsplash mounted faucet. PVD chrome finished solid brass construction faucet body. Spout 12-3/4" high from bottom of base (8-3/4" from base to aerator) with 5-3/8" reach. Laminar flow 2.0GPM aerator.

Control module AC vandal resistant with armored control/power cable. Power adapter, standard plug-in type, provides 12V DC output. Slow closing solenoid valve, piston-operated, provides reliable smooth operation without water hammer. In-line filter with clean-out trap. Sensor range adjustable from 6" to 30". Automatic time-out feature adjustable from 0 (preset-active until no activity sensed) up to 60 seconds in 15 second intervals. Shut-off delay adjustable to 0, 1(preset), 2, 4 or 8 seconds.

Battery powered unit available. Specifications same as above, except provides 6V DC and includes battery holder for four AA batteries in lieu of plug-in power adapter.



JSFVR-5 Stainless Steel

 **AB 1953 Compliant**

Deck mounted single handle ADA Compliant faucet. Features include **type 304 stainless steel body**, spout, handle and supply pipe and ceramic disc cartridge. Polished stainless mirror finish. Aerator integral to spout and vandal resistant. Aerator removable with proprietary faucet wrench. Deck to top of spout 14". Deck to aerator 9-3/4".



JPR-501 Pre-Rinse Faucet

 **AB 1953 Compliant**

Single hole heavy cast body with spring action goosneck. Quarter turn ceramic disc cartridge. Brushed nickel finish. Heavy duty magnetic hose mount holds the spray head securely in place for hand washing use. Supplied with stainless steel braided hose and 20.5" reach. Overall 20.5" height. 7.5" bottom of spray valve to centerline of faucet body.

NEW!



JS-45-TGA

 **AB 1953 Compliant**

Goosneck faucet with 3-1/2" reach, and measures 5-1/2" from inlet centerline to top of spout. (4" O.C. supply).




JS-47-TGSA

 **AB 1953 Compliant**

Backsplash mounted goosneck faucet and aerator, with 4-1/16" spout reach. 10-3/16" from inlet centerline to top of spout (8" O.C. supply). PVD chrome finish.



JFVC-301



Floor mounted dual pedal operated self closing foot valves. 1/2" inlets on 1-1/4" centers. Polished chrome pedals with rough chrome valve body. 1/2" outlet.

J-15-FS



Chrome plated brass drain with flat grid strainer. 1-1/2" O.D. chrome plated tailpiece, 4" long.

JTN-150




P-Trap Solid, non adjustable cast brass P-trap with brass slip nut. Hex head cleanout to have neoprene O-ring and top to be flush with inside bottom of J-bend.

JTM47 Thermostatic Mixing Valve

 **AB 1953 Compliant**

Anti-Scald mixing valve with bronze body with integral check valves and adjustment cap with locking feature. 1/2" threaded union inlet and outlet connections. Temperature range from 60 to 120 F(16 C to 49 C). ASSE Standard 1016 Listed.



JT-150 Trap



P-trap to have cast brass J-Bend, brass slip nuts and 17 gauge brass wall bend. Chrome plated finish. Hex head clean-out plug with neoprene O-Ring, and top of plug to be flush with bottom of inside J-Bend.


LAVATORY DROP-IN SINKS FOR JLT ENVIRO-SERIES SINK SYSTEMS

SPECIFICATIONS




Seamless die-drawn construction of 18 gauge type 304 stainless steel. Interior and top surfaces polished to a non-porous Hand-Blended Just Finish, and highlighted bowl rim. Smooth, fully coated underside insulates for sound, and reduces condensation. Self-rimming top mount Grip-Rim Plus* stainless steel mounting channels. Oval and round lavatories include clips and stainless steel mounting channel. Rectangle bowls have straight-sided compartment with 1 3/4" radius corners providing greater capacity.


OLF-ADA SERIES




OIF-ADA SERIES

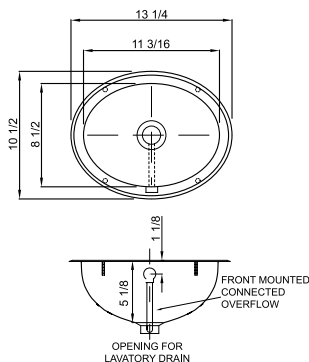

CIF-ADA-SERIES



SLF-ADA SERIES



SENSOR PACKAGES INCLUDE

JSL-300-AC or B Sensor



AB 1953 Compliant



Deck mount, non-mixing, automatic faucet with chrome finish, solid brass 4" centerset construction, three hole punching required.

Includes faucet, sensor assembly with; Armored/vandal resistant control cable, wall mountable/vandal and water resistant control box, 0.5 GPM vandal resistant laminar flow control, 6V DC slow-closing solenoid valve.

AC POWERED

Plug-in power adapter with armored/vandal resistant output cable, 3/8" copper supply tube, in-line filter and mounting hardware.

BATTERY POWERED

Battery holder with (4) AA batteries, 3/8" copper supply tube, in-line filter and mounting hardware.

JTM47 Thermostatic Mixing Valve



AB 1953 Compliant

Anti-Scald mixing valve with bronze body with integral check valves and adjustment cap with locking feature. 1/2" threaded union inlet and outlet connections. Temperature range from 60 to 120 F (16 C to 49 C). ASSE Standard 1016 Listed.



J-ADA-115-FS



Chrome plated flat grid lavatory drain. 1-1/4" offset tailpiece.

NEW!

ADA COMPLIANT - 18 GAUGE CIRCULAR BOWL W/OUT OVERFLOW

Model No.	O.D. DIA	I.D. DIA	Depth
CIR-ADA-12	14-1/4	12	6
CIR-ADA-14	16-1/4	14	5-1/4
CIR-ADA-15	17-1/4	15	5-1/4



WITH OVERFLOW

Model No.	O.D. DIA	I.D. DIA	Depth
CIF-ADA-12	14-1/4	12	6
CIF-ADA-14	16-1/4	14	5-1/4
CIF-ADA-15	17-1/4	15	5-1/4

NEW!

OVAL LAVATORY WITH LEDGE - LESS OVERFLOW - 18 GAUGE

Model No.	O.D.	I.D.	Depth
OLR-ADA-1619	16 x 19	11-3/8 x 15-1/2	6



WITH OVERFLOW

Model No.	O.D.	I.D.	Depth
OLF-ADA-1619	16 x 19	11-3/8 x 15-1/2	6

NEW!

OVAL LAVATORY WITHOUT LEDGE - LESS OVERFLOW - 18 GAUGE

Model No.	O.D.	I.D.	Depth
OIR-ADA-1013	10-1/2 x 13-1/4	8-1/2 x 11-3/16	5-1/8



WITH OVERFLOW

Model No.	O.D.	I.D.	Depth
OIF-ADA-1013	10-1/2 x 13-1/4	8-1/2 x 11-3/16	5-1/8

ADA COMPLIANT - SINGLE BOWL - 18 GAUGE - LEDGEBACK

Model No.	O.D. ¹	I.D. ²	Depth
SL-ADA-1617-A-GR	16 x 17	10 x 14	4-1/2 to 6-1/2
SL-ADA-17519-A-GR	17-1/2 x 19	11-1/2 x 16	4-1/2 to 6-1/2
SL-ADA-2019-A-GR	20 x 19	14 x 16	4-1/2 to 6-1/2



WITH INTEGRA-FLOW SYSTEM

Model No.	O.D.	I.D.	Depth
SLF-ADA-1617-A-GR	16 x 17	10 x 14	4-1/2 to 6-1/2
SLF-ADA-17519-A-GR	17-1/2 x 19	11-1/2 x 16	4-1/2 to 6-1/2
SLF-ADA-2019-A-GR	20 x 19	14 x 16	4-1/2 to 6-1/2

¹ O.D. - Overall Dimensions (Front-to-Back X Left-to-Right)

² I.D. - Inside Dimensions (Front-to-Back X Left-to-Right)

ADDITIONAL FAUCET OPTIONS

JSL-100-AC or B



AB 1953 Compliant



Deck mount, non-mixing, automatic sensor faucet with chrome finish, solid brass construction, single hole punch. Specify

☐ "AC" (includes plug-in power adapter) or
☐ "B" (includes battery holder with (4) AA batteries).



JV-1139-A-W4



Lavatory centerset faucet less drain with 4" wrist blade handles. Solid cast brass body, replaceable seats and areator. Flow rate 2.2 GPM at 80PSI. PVD lifetime finish.

