

## Features

- 8" (203 mm) widespread faucet holes
- Swivel/rigid gooseneck spout
- 1/4-turn full brass ceramic valve
- 2.0 gpm (7.6 lpm) maximum flow rate at 60 psi (4.14 bar)
- Vandal-resistant aerator
- 4-1/16" vandal-resistant metal wristblade lever handles
- Integral Supply Stops with lock key for easy and convenient access
- Drain sold separately

## Material

- Solid-brass construction with thick chrome plating for rough commercial applications

## Installation

- Eccentric inlet shanks for easy installation



**ADA**

**CSA B651**

**OBC**

## Codes/Standards

ASME A112.18.1/CSA B125.1

DOE - Energy Policy Act 1992

ADA

ICC/ANSI A117.1

CSA B651

OBC

## KOHLER® One-Year Limited Warranty

See website for detailed warranty information.


## Available Colors/Finishes

*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|



|    |                 |
|----|-----------------|
| CP | Polished Chrome |
|----|-----------------|

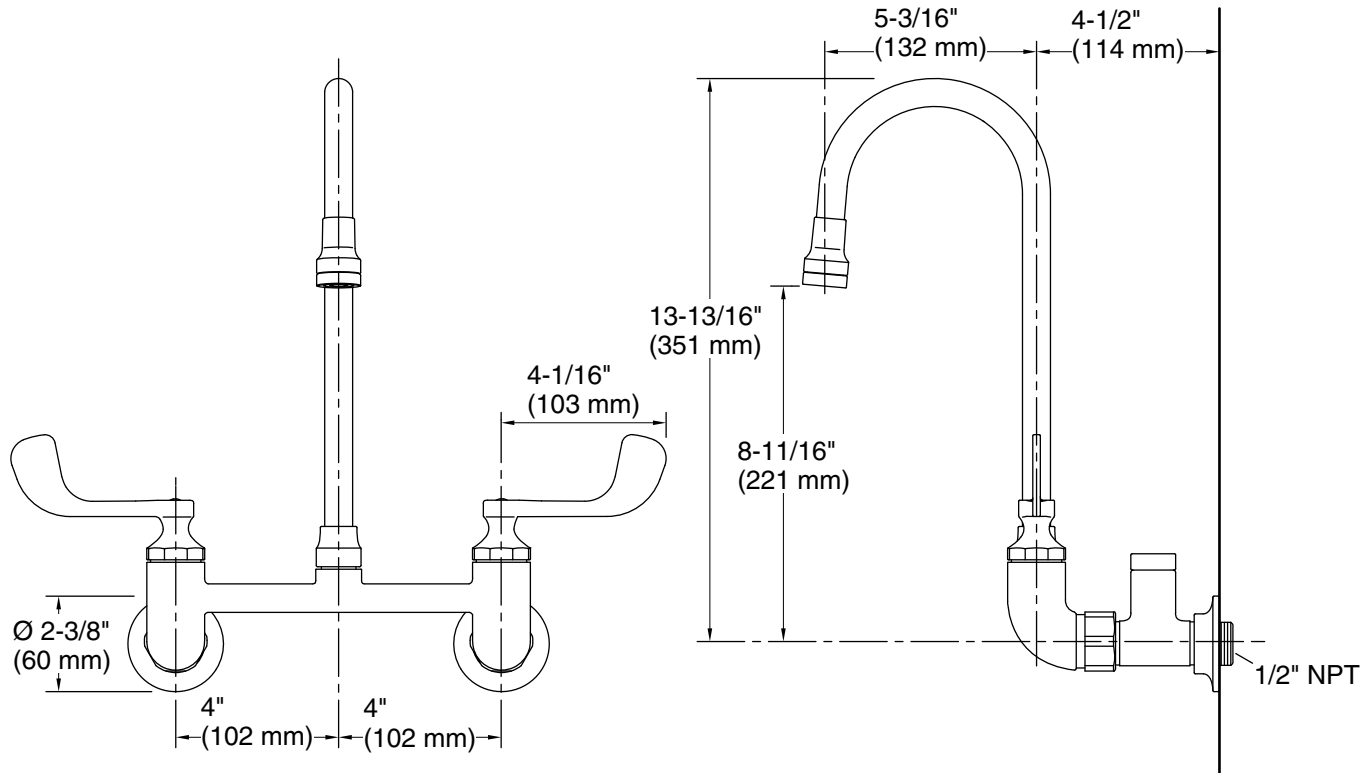

#### Technical Information

All product dimensions are nominal.

Faucet flow rate: 2 gal/min (7.6 l/min)

#### Spout:

Spout reach:  $5\text{-}1/8"$  (130 mm)

Handle clearance:  $3"$  (76 mm)

#### Notes

Install this product according to the installation instructions.

ADA compliant for faucet handles only

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.