



# Morningside™

## Wall-mount Wheelchair Bathroom Sink

### K-12636-R

#### Features

- Made from premium materials that withstand high-volume usage
- 20" (508 mm) x 27" (686 mm)
- 4" center drilling
- Includes soap dispenser drilling on right
- ADA-compliant when installed with K-13885 offset drain

#### Material

- Vitreous china

#### Installation

- Wall-mount
- Drilled for concealed arm carrier installation

#### Recommended Products/Accessories

K-8998 P-Trap  
K-7131-A Offset Drain  
K-23726 Drain treatment  
K-23725 Cast iron cleaner



ADA

#### Codes/Standards

ASME A112.19.2/CSA B45.1  
ADA  
ICC/ANSI A117.1

#### KOHLER® Vitreous China Bathroom Sink Lifetime Limited Warranty


See website for detailed warranty information.

#### Available Colors/Finishes

*Color tiles intended for reference only.*

#### Color Code Description

|                                                                                     |   |       |
|-------------------------------------------------------------------------------------|---|-------|
|  | 0 | White |
|-------------------------------------------------------------------------------------|---|-------|

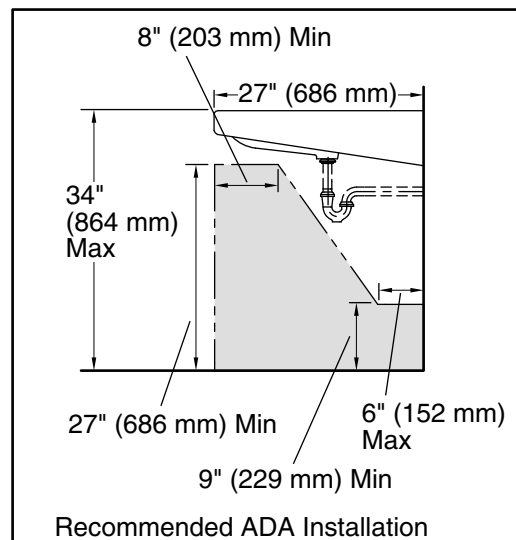

|                          |                                                                            |
|--------------------------|----------------------------------------------------------------------------|
| Basin configuration:     | Single Bowl                                                                |
| Center(s):               | 4" (102 mm)                                                                |
| Bowl area (Only):        | Length: 14" (356 mm)<br>Width: 13" (330 mm)<br>Water depth: 2-5/8" (67 mm) |
| With overflow:           | Yes                                                                        |
| Number of deck<br>holes: | 4                                                                          |
| Faucet hole(s):          | 1-1/4" (32 mm)                                                             |
| Soap/Lotion hole:        | 1-1/4" (32 mm)                                                             |
| Drain hole:              | 1-3/4" (44 mm)                                                             |

Install this product according to the installation instructions.

ADA compliant when installed to the specific requirements of these regulations.