



# Sunward®

66" x 42" drop-in whirlpool bath with Bask® heated surface  
K-6347-W1

## Features

- Bask® heated surface creates spa-like relaxation with soothing warmth on your back, shoulders, and neck
- Three heat settings allow you to customize the surface temperature
- Single-speed whirlpool offers performance and value, with six fully adjustable jets
- Hydromassage flow and direction can be controlled at each jet
- Oval basin creates a spacious bathing experience
- Integral lumbar support and armrests offer extra comfort while bathing
- Textured bottom surface

## Material

- Acrylic

## Hydrotherapy

- Whirlpool

## Installation

- Reversible drain
- Drop-in or undermount
- Smooth backside for easy handling and mounting of drain and overflow

## Required Products/Accessories

K-11677 Bath Drain

## Recommended Products/Accessories

K-738 Under-Mount Install Kit - K-6346/K-6347

K-23726 Drain treatment



## Codes/Standards

ASME A112.19.7/CSA B45.10

CSA B45.5/IAPMO Z124

UL 1795

UL Listed

## KOHLER® Plastic Baths and Shower Bases Lifetime Limited Warranty KOHLER® Hydrotherapy Components Five-Year Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes


*Color tiles intended for reference only.*

| Color | Code | Description |
|-------|------|-------------|
|-------|------|-------------|

|                                                                                     |    |         |
|-------------------------------------------------------------------------------------|----|---------|
|  | 0  | White   |
|  | 96 | Biscuit |




**Sunward®**  
66" x 42" drop-in whirlpool bath with Bask® heated  
surface  
**K-6347-W1**

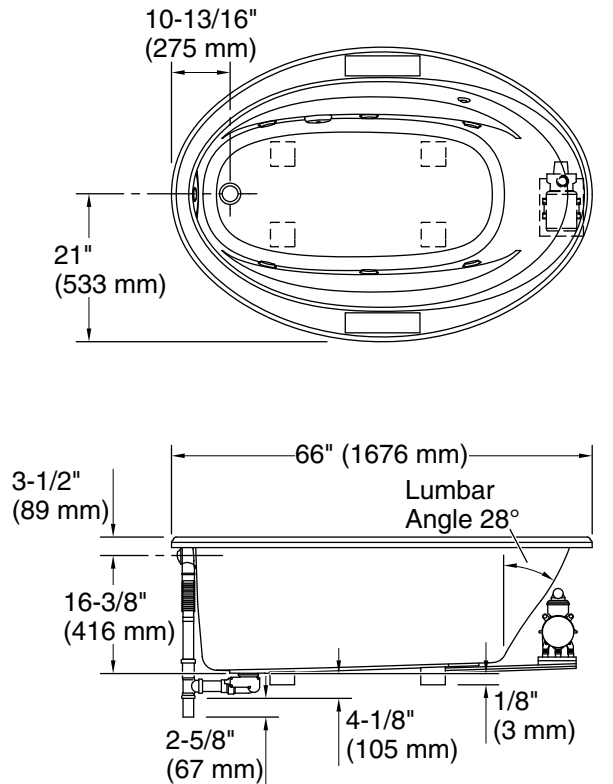


No change in measurements if connected with drain illustrated. (K-37382)

 Recommended Faucet Location



Access Panel  
20" (508 mm) W x 15" (381 mm) H

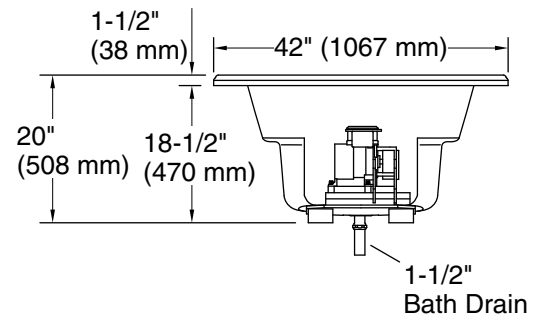

### Required Electrical Service

Two circuits required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI). Outside North America, this device may be known as a Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz  
Heated Surface: 120 V, 15 A, 60 Hz

### Technical Information

All product dimensions are nominal.

Drain location: Reversible  
Basin area, bottom: 48-5/8" x 24-1/2" (1235 mm x 622 mm)  
Basin area, top: 60" x 32-3/16" (1523 mm x 818 mm)  
Minimum floor load: 34 lbs/ft<sup>2</sup> (166 kg/m<sup>2</sup>)  
Water depth: 14-5/16" (364 mm)  
Water capacity: 70 gal (265 L)  
Template: Drop-in, 1233384-7, not required, included  
Electrical component rating: Pump: 120 V, 7.5 A, 60 Hz, 65 W  
Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W  
Pump speed: Single

### Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Kit is required for under-mount installations (sold separately).

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada

3-31-2025 00:32 - US/CA

THE BOLD LOOK  
OF **KOHLER®**