

KOHLER® Faucets

Exposed hybrid 0.125 gpf washdown urinal flushometer
K-7546

Features

- Fixture-mount design.
- Includes a 30-year hybrid energy cell.

Material

- Brass.

Technology

- Electronic infrared sensor with Tripoint® technology for accurate activation.
- Slow-closing piston technology.

Installation

- Intended for urinal installations with 3/4" spud coupling connection.

Recommended Products/Accessories

K-23723 Faucet cleaner

Optional Products/Accessories

GP1118986 Flushometer Extension Kit



ADA

CSA B651

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1

CSA B64

CSA B125.3

ASSE 1037/ASME A112.1037/CSA B125.37

ADA

ICC/ANSI A117.1

CSA B651

OBC

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------



CP	Polished Chrome
----	-----------------

1-800-4KOHLER (1-800-456-4537)


Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to www.kohler.com.

5-29-2021 22:13 - US/CA

THE BOLD LOOK
OF **KOHLER®**

*10-3/4" (273 mm) minimum with a
6" (152 mm) critical level above the fixture

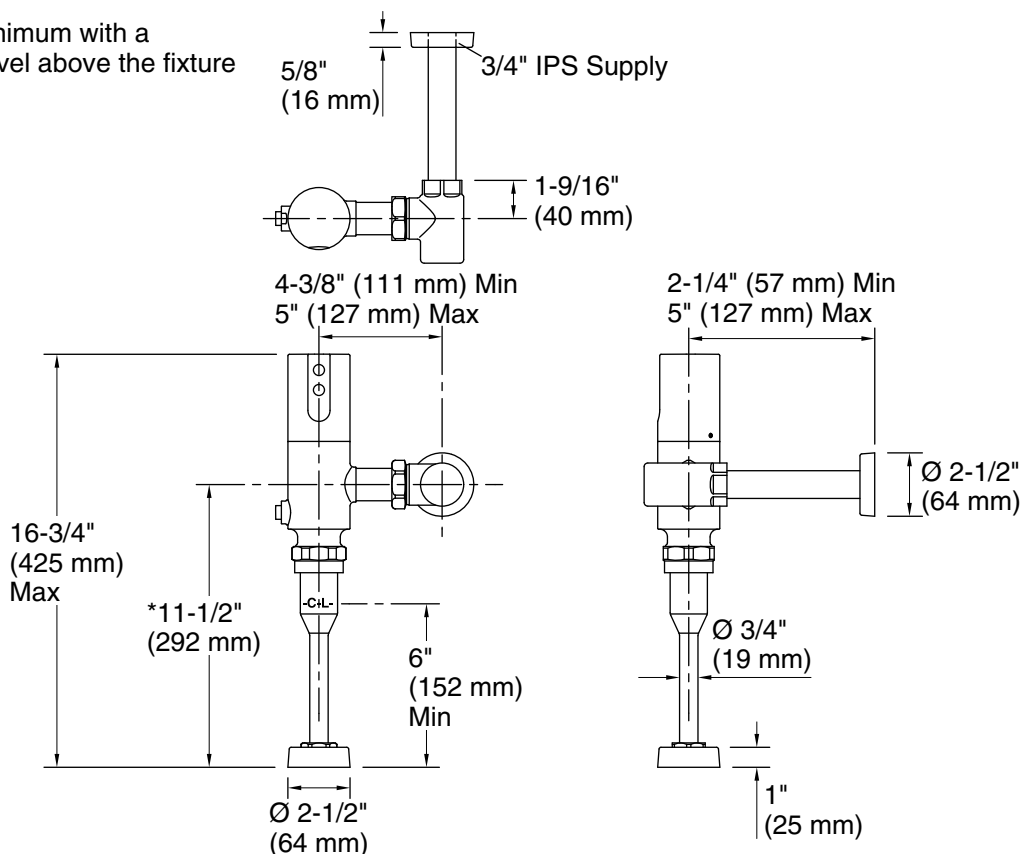

Technical Information

All product dimensions are nominal.

Power source: Hybrid Energy Cell, included

Pressure/fixture Supply Requirements

Fixture pressure 80 psi (551.6 kPa)

max (static):

Min flowing 25 psi (172.4 kPa)

pressure:

Min flow rate: 10 gpm (37.9 lpm)

Notes

Install this product according to the installation guide.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.