

Location: _____




FS1520-FL

**8" X 8" X 6" FLOOR AREA AND INDIRECT
SANITARY WASTE DRAIN WITH FLANGE**

Specification: MIFAB Series FS1520-FL, 8" x 8" x 6" deep cast iron floor area and indirect sanitary waste drain complete with white acid resistant porcelain enamel coated interior and loose set grate and anchor flange with weepholes. Anti-splash aluminum dome strainer included.

Function: Used in kitchens, restaurants, grocery stores, hospitals, schools, and other areas that require a medium volume sanitary drain. The anchor flange is engineered to receive water proofing membrane. Membrane clamps are recommended for use with the anchor flange (Suffix -C). The light duty grate is not recommended for foot traffic.

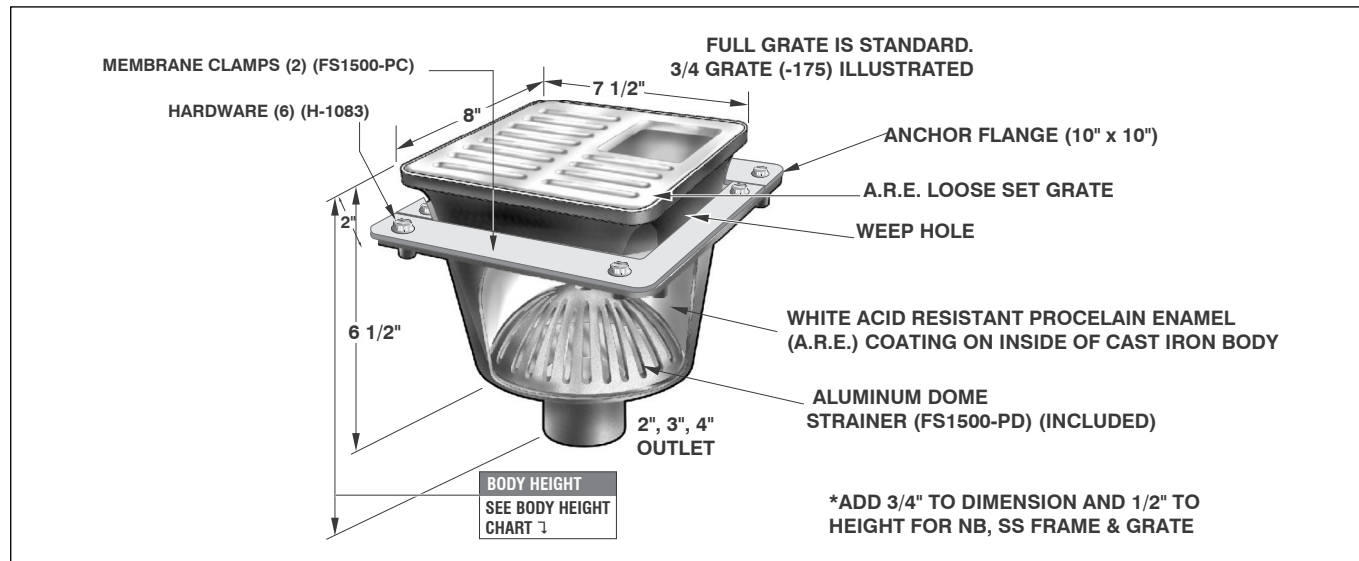

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30) / ABS (-31)
○ 2" (51)	□ 7 3/4" (197)	□ 7 3/4" (197)	□ 8 5/8" (219)	□ *8 1/2" (216)	□ *9 1/4" (235)
○ 3" (76)	□ 7 3/4" (197)	□ 7 3/4" (197)	□ 8 5/8" (219)	□ *8 7/8" (225)	□ *9 1/4" (235)
○ 4" (102)	□ 7 3/4" (197)	□ 7 3/4" (197)	□ 8 5/8" (219)	□ *8 7/8" (225)	□ *9 1/4" (235)

*Indicates outlet size and connection available with transition outlet body only.

** 4" Inside Caulk outlet body only available with -FL anchor flange (as a std. body design not transition).

Suffix	Description		
□ -1	Full NB grate and frame	□ -90	Threaded side outlet
□ -3	Full SS grate and frame	□ -90NH	No hub side outlet
□ -5	Sediment bucket (FS1500-PB)	□ -95	Client logo (-1, -3 only)
□ -6	Security screws (H-1039A, 4 pcs) (-1, -3 only)	□ -150	1/2 grate
□ -7	Trap seal primer connection	□ -175	3/4 grate
□ -8	Backwater Valve (BV1250 Series) (2", 3", 4")	□ -BA	Buy American Act compliant product
□ -9	Hinged grate (-3 only)	□ -PA	Pennsylvania Steel Act compliant product
□ -21	Secondary flat strainer (FD-9600 Series)	□ -C	Membrane clamp
□ -22	Less grate	□ -F4	4" round funnel
□ -30	PVC socket connection W/A.R.E. Body (2", 3", 4")	□ -F6	6" round funnel
□ -31	ABS socket connection W/A.R.E. body (2", 3", 4")	□ -G	4" x 9" oval funnel
□ -32	Deep seal trap (2", 3", 4" no hub) (MI-950 Series)	□ -J	3" x 1" oval funnel
□ -50	A.R.E. coated cast iron funnel	□ P	Push on outlet (2", 3" or 4")
□ -51	2 1/2" round center hole in grate (-1, -3 only)	□ (Standard)	No hub outlet
□ -69	Stainless steel sediment bucket (FS1500-PB-3)	□ T	Threaded outlet (2", 3" or 4")
□ -83	Stainless steel mesh screen over sediment bucket (add to S.S. Bucket)	□ X	Inside caulk outlet (2", 3" or 4")
		□ -Z	Extended wide elastomeric flange (with -FL only)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____