



Location: **HY-2000**

ENCASED NON-FREEZE WALL HYDRANT

Specification: MIFAB Series HY-2000 ____ (specify length) A.S.S.E. 1019-B certified exposed type, self draining, non freeze wall hydrant with A.S.S.E. 1011 approved anti-siphon and vandal resistant integral vacuum breaker with 3/4" (19) male hose connection. Hydrant assembly complete with neoprene plunger to control both the flow and drain functions, hardened bronze operating stem, drain port under the hexagon nut, heavy duty brass casing, 360 degree swivel inlet connection, heavy duty chrome plated bronze head casting, polished chrome plated face plate, and satin finished nickel bronze box with hinged locking cover. Operating key to be furnished with each hydrant.

Function: Designed to blend in with commercial applications such as office buildings, apartment complexes, malls and shopping centers, schools, churches and industrial buildings.

Overhead view

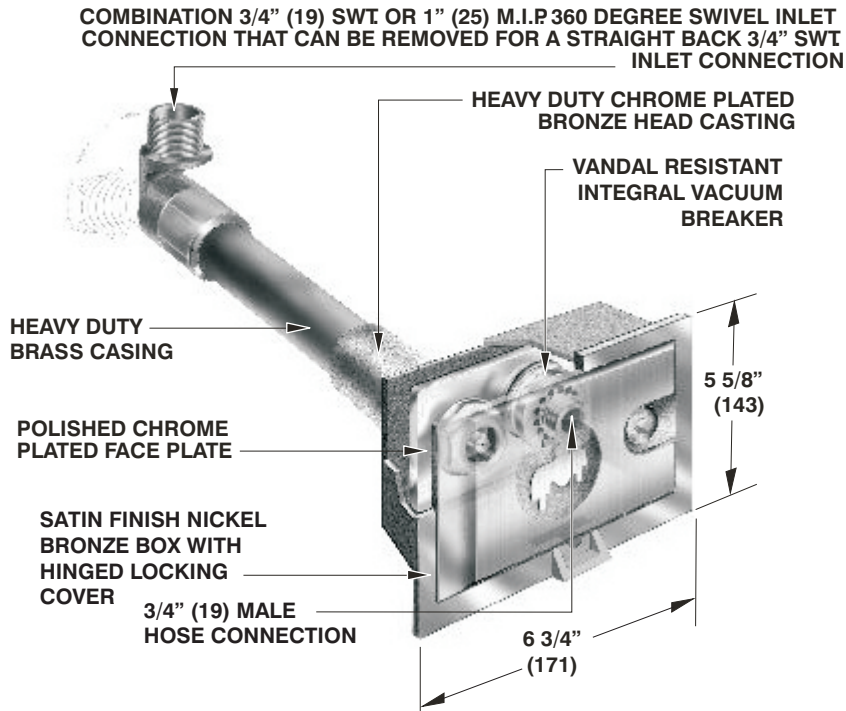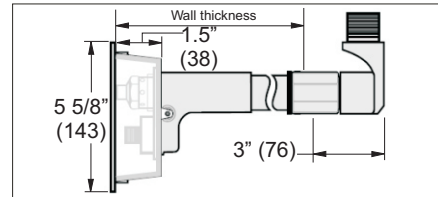

RECOMMENDED WALL OPENING 4 1/4" (108) X 6 1/4" (158)

(Dimension) Denotes Millimetres

MIFAB® HY-2000 Series Features

- **SWIVEL CONNECTION** - 360 degree combination 3/4" SWT. and 1" male threaded inlet connection. Swivel connection can be removed for 3/4" SWT. straight back inlet.
- **VACUUM BREAKER** - unique vandal resistant integral vacuum breaker protects owner from anti-siphon conditions. Self draining.
- **FACE PLATE** - polished chrome plated.
- **CASING** - heavy duty brass casing tube.
- **APPROVALS** - HY-2000 Series wall hydrant is tested and certified by C.S.A. to the A.S.S.E. Standard 1019-B. The anti-siphon vacuum breaker is tested and certified by C.S.A. to the A.S.S.E. Standard 1011.



MODEL NO.	WALL THICKNESS		OVERALL LENGTH		APPROXIMATE WEIGHT		SWIVEL INLET CONNECTION
	IN	MM	IN	MM	Lbs.	Kg.	IN
○ HY-2006	6	152	10	254	7.0	3.18	3/4" SWT., 1" Male IPS combination
○ HY-2008	8	203	12	305	7.5	3.41	3/4" SWT., 1" Male IPS combination
○ HY-2010	10	254	14	356	8.0	3.64	3/4" SWT., 1" Male IPS combination
○ HY-2012	12	305	16	406	8.5	3.86	3/4" SWT., 1" Male IPS combination
○ HY-2014	14	356	18	457	9.0	4.09	3/4" SWT., 1" Male IPS combination
○ HY-2016	16	406	20	508	9.5	4.32	3/4" SWT., 1" Male IPS combination
○ HY-2018	18	457	22	559	10.0	4.54	3/4" SWT., 1" Male IPS combination
○ HY-2020	20	508	24	610	10.5	4.77	3/4" SWT., 1" Male IPS combination
○ HY-2022	22	559	26	660	11.0	5.00	3/4" SWT., 1" Male IPS combination
○ HY-2024	24	610	28	711	11.5	5.22	3/4" SWT., 1" Male IPS combination

SUFFIX

- ☐ -0
☐ -3
☐ -49

OPTIONAL VARIATIONS:

- 1" (25) Hose connection
 Cast stainless steel hydrant box
 Polished chrome plated nickel bronze box

SUFFIX

- ☐ -52
☐ -BA

A.S.S.E 1052 double check vacuum breaker. HY-1600 deep rough in Stainless Steel box required
 Buy American Act compliant product

SUFFIX

- ☐ -K Cylinder key lock
☐ -RB Fabricated stainless steel hydrant box with round back for tilt up construction
☐ -S Four 1" x 1/4" (25 x 6) slots on top and two sides of box to receive mounting brackets
☐ -WC Wall clamp

Job Name:
 Section No:
 Schedule No:

Page No:
 Contractor:
 Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880