

Location: \_\_\_\_\_




**MHY-40**

## HOT AND COLD NON FREEZE WALL HYDRANT

**Specification:** MIFAB® Series MHY-40 A.S.S.E. 1019-B approved exposed type, self draining, non freeze hot and cold wall hydrant with A.S.S.E. 1011 approved anti-siphon integral vacuum breaker with 3/4" male hose connection. Hydrant assembly complete with hot and cold temperature control selection, one piece neoprene plunger to control the flow, hardened bronze operating stem, heavy duty brass casing, heavy duty chrome plated bronze head casing and chrome plated face plate. Loose tee key to be furnished with each hydrant.

**Function:** Designed to blend in with commercial applications such as office buildings, apartment complexes, malls and shopping centers, schools, churches and industrial buildings.

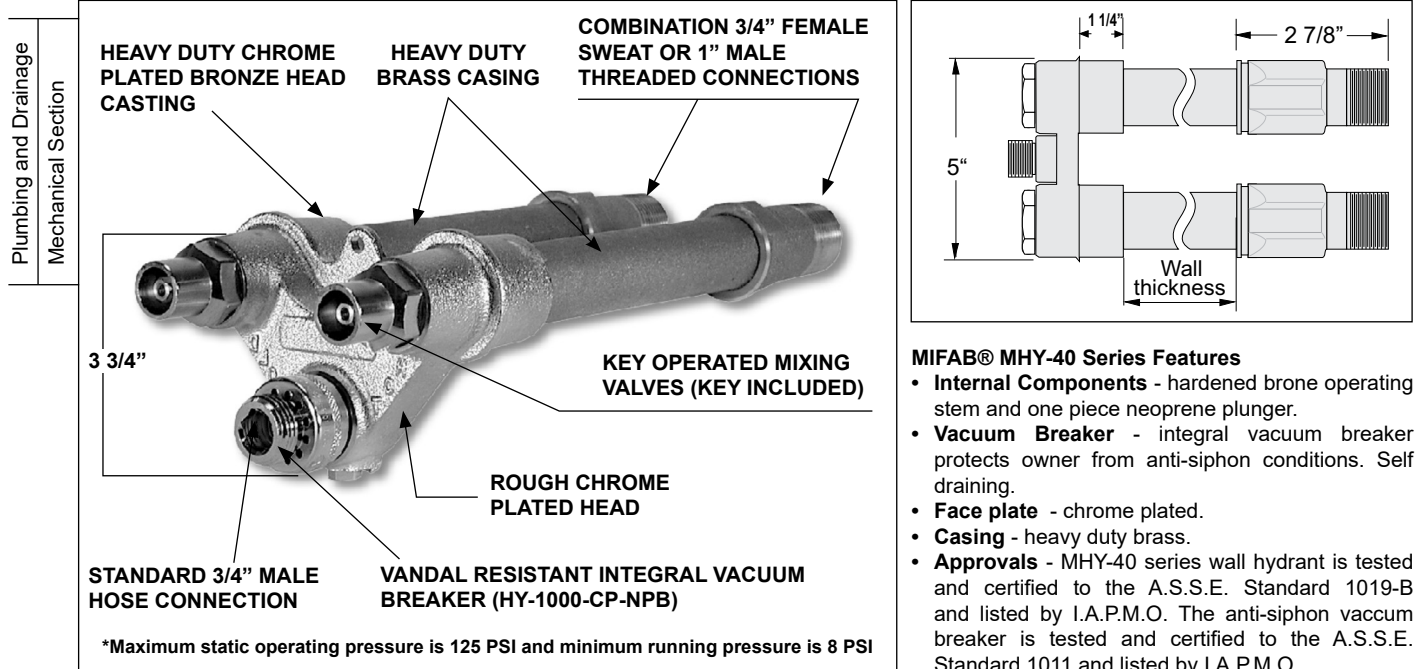

| MODEL NO.   | WALL THICKNESS |     | OVERALL LENGTH |     | APPROXIMATE WEIGHT/Lbs. |      | INLET CONNECTION                           |
|-------------|----------------|-----|----------------|-----|-------------------------|------|--------------------------------------------|
|             | IN             | MM  | IN             | MM  | Lbs.                    | Kg.  |                                            |
| ○ MHY-40-4  | 4              | 102 | 11             | 279 | 4                       | 1.81 | 3/4" Female Sweat, 1" Male IPS combination |
| ○ MHY-40-6  | 6              | 152 | 13             | 330 | 7.54                    | 3.42 | 3/4" Female Sweat, 1" Male IPS combination |
| ○ MHY-40-8  | 8              | 203 | 15             | 381 | 8.26                    | 3.74 | 3/4" Female Sweat, 1" Male IPS combination |
| ○ MHY-40-10 | 10             | 254 | 17             | 432 | 8.98                    | 4.10 | 3/4" Female Sweat, 1" Male IPS combination |
| ○ MHY-40-12 | 12             | 305 | 19             | 483 | 9.70                    | 4.39 | 3/4" Female Sweat, 1" Male IPS combination |
| ○ MHY-40-14 | 14             | 356 | 22             | 559 | 10.42                   | 4.72 | 3/4" Female Sweat, 1" Male IPS combination |
| ○ MHY-40-16 | 16             | 406 | 23             | 584 | 11.14                   | 5.05 | 3/4" Female Sweat, 1" Male IPS combination |
| ○ MHY-40-18 | 18             | 457 | 25             | 635 | 11.86                   | 5.38 | 3/4" Female Sweat, 1" Male IPS combination |
| ○ MHY-40-20 | 20             | 508 | 27             | 686 | 12.58                   | 5.70 | 3/4" Female Sweat, 1" Male IPS combination |
| ○ MHY-40-24 | 24             | 610 | 31             | 787 | 14.02                   | 6.35 | 3/4" Female Sweat, 1" Male IPS combination |

### SUFFIX OPTIONAL VARIATIONS

- ☐ -0 1" (25) Hose connection
- ☐ -6 3/4" (19) I.P.S. 90 degree elbow and union nut Wall clamp
- ☐ -BA Buy American Act compliant product
- ☐ -PA Pennsylvania Steel Act compliant product
- ☐ -WC Wall clamp



**(Dimensions) Denotes Millimeters**

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_