

Location: _____




C1100-XR

**FLOOR CLEANOUT WITH HEAVY DUTY ROUND
ADJUSTABLE COVER AND PLUG**

Specification: MIFAB C1100-XR Series adjustable floor cleanout with lacquered cast iron body and anchor flange, secondary "O" ring Test Seal, 4" diameter cleanout opening and round heavy duty square scoriated combined cover and plug top assembly with stainless steel vandal proof allen key screws and primary gasket seal. (For membrane floors, add Suffix -C for the membrane clamp.)

Function: Used in unfinished floors with heavy load traffic such as warehouses and manufacturing facilities to provide emergency access to the plumbing lines for removal of blockages. Replacement of the surface level cover/plug with the neoprene gasket glued to the underside provides visual evidence that the cleanout has been properly resealed to prevent harmful sewer gases from entering the building.

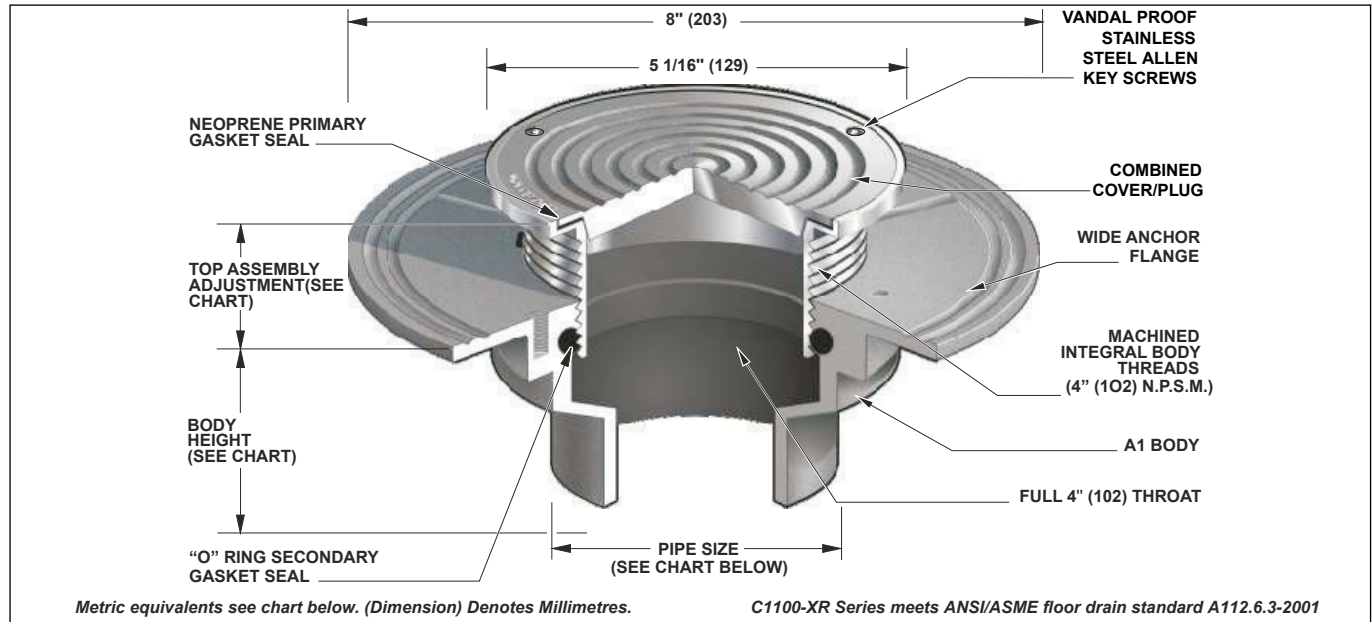

TOP ASSEMBLY DIAMETER	TOP ASSEMBLY ADJUSTMENT		ANSI/ASME RATING			PIPE SIZE	BODY HEIGHT				
	MIN	MAX	LOAD RATING				NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
			N.B. (-1) Lbs.	S.S. (-3) Lbs.	D.I. (-4) Lbs.						
○ 5" (127)	1/2" (13)	1 1/4" (32)	Up to 4,999	5,000 to 7,499	Special Duty Over 10,000	○ 2" (51)	☐ 3" (76)	☐ 3 3/8" (86)	☐ 2 1/4" (57)	☐ 3 3/4" (95)	☐ 2 15/16" (75)
						○ 3" (76)	☐ 3" (76)	☐ 3 3/8" (86)	☐ 2 5/8" (67)	☐ 3 3/4" (95)	☐ 3 3/4" (95)
						○ 4" (102)	☐ 3" (76)	☐ 3 3/8" (86)	☐ 2 5/8" (67)	☐ 3 3/4" (95)	☐ 3 3/4" (95)
						○ 5" (127)	☐ 3" (76)	--	☐ 2 5/8" (67)	☐ 3 3/4" (95)	--
						○ 6" (152)	☐ 3 1/4" (83)	☐ 6 1/2" (165)	--	--	--

Suffix	Description		
☐ -1	Nickel bronze top assembly	☐ -90	Threaded side outlet (2", 3", 4") (cast iron only)
☐ -3	Heavy duty stainless steel top assembly	☐ -90NH	No hub side outlet (2", 3", 4") cast iron only)
☐ -4	Extra heavy duty ductile iron top assembly for unfinished areas	☐ -95	Special marking etched into top (SAN for sanitary or GW for Grease Waste)
☐ -6	Security screws (TR25 Torx & pin)	☐ -ARRA	American Iron and Steel Act Compliant
☐ -11	Acid resistant epoxy coated body	☐ -BA	Buy American Act compliant product
☐ -13	Galvanized body	☐ -C	Membrane clamp
☐ -15	Extension	☐ (Standard)	No hub outlet
☐ -28	Stainless steel body (Type 304)	☐ P	Push on outlet
☐ -30	PVC socket connection body	☐ -PA	Pennsylvania Steel Act compliant product
☐ -31	ABS socket connection body	☐ T	Threaded outlet (2", 3", 4")
☐ -34	Secondary closure plug	☐ X	Inside caulk outlet
		☐ -XS	Heavy duty square top assembly (-1, -3 only)
		☐ -Z	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
Section No: _____ Contractor: _____
Schedule No: _____ Purchase Order No: _____