

Location: _____





C220-R

**5" ROUND ADJUSTABLE
FLOOR CLEANOUT**



Specification: MIFAB C220-R Series adjustable floor cleanout with lacquered cast iron body, secondary closure plug and scoriated combined gasketed cover and plug top assembly (specify material type) with stainless steel vandal proof allen key screws.

Function: Used in finished floors to provide emergency access to the plumbing lines for removal of blockages.

C224-30-R-4

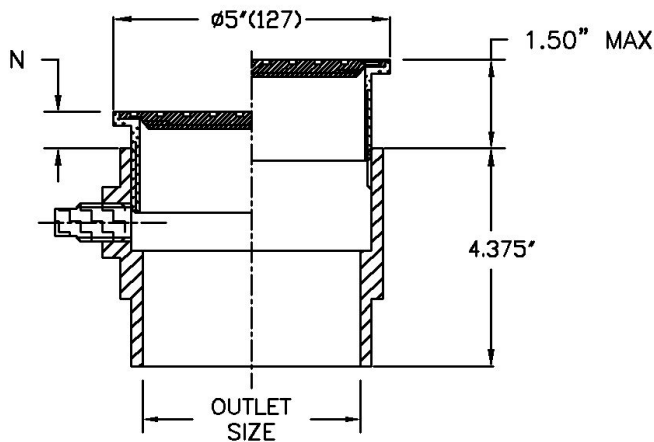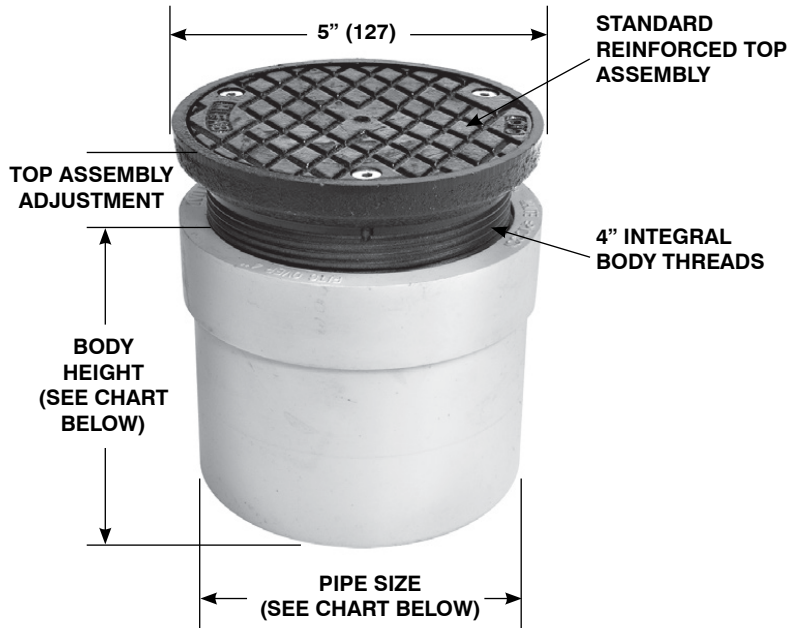

C224-R-1

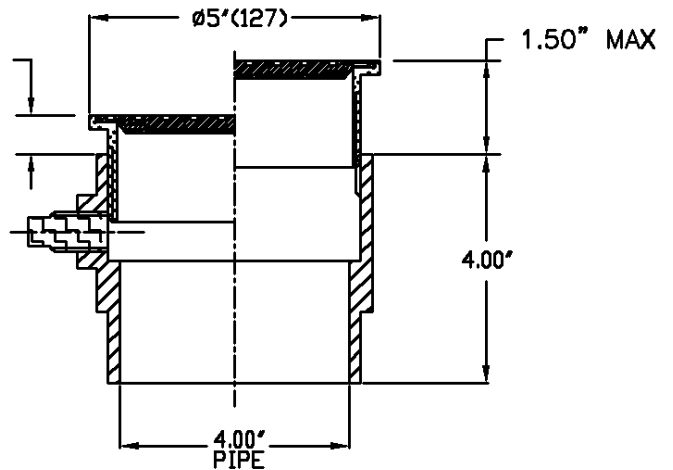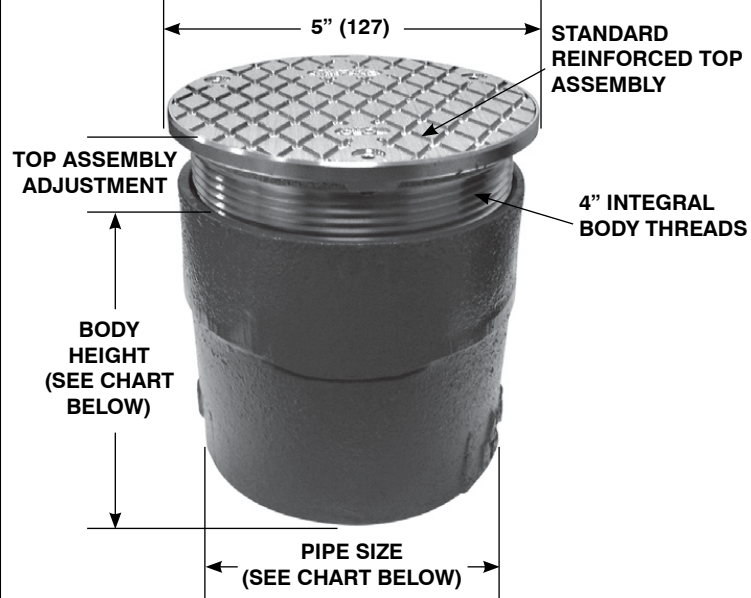

TOP ASSEMBLY DIAMETER	TOP ASSEMBLY ADJUSTMENT		ANSI/ASME RATING			PIPE SIZE	NO HUB (STANDARD)	PUSH ON (P)	PVC/ABS (-30)/(-31)
			FREE AREA	LOAD RATING					
	MIN	MAX			N.B. (-1)				
5" (127)	1/2" (13)	1 1/4" (32)	8 in ² (5200 ²)	Up to 2,000 Lbs.	Over 10,000 Lbs.	2" (51)	4" (102)	4 3/8" (111)	4 3/8" (111)
						3" (76)	4" (102)	4 3/8" (111)	4 3/8" (111)
						4" (102)	4" (102)	4 3/8" (111)	4 3/8" (111)

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contract: _____
 Purchase Order No: _____