

Location: _____



CAD-FL

CEILING OR WALL ACCESS DOOR, FLUSH DOOR WITH FRAME

Specification: MIFAB® Series CAD-FL access door is designed for flush installation in drywall or plaster surfaces. The door panel is flush with the frame. When installed flush with the wall or ceiling, only the door panel is exposed. A mounting bracket is recessed 5/8" (15) from the door. It has a unique white finish.

Material: CAD-FL Series is a 16 gage satin coat door and a 16 gage satin coat frame. The CAD-FLSS Stainless Steel Series is 16 gage #304 stainless steel door and frame.

Finish: Satin coat steel doors have a primed white finish. Stainless steel doors have a #4 brush satin finish.

Door: Flush to frame. Turned back around edges for extra rigidity.

Frame: Flush to surface. Mounting flange is 1 1/8" (28) wide and recessed 5/8" (15) from the door.

Hinge: Concealed pivot pins.

Latch: Standard – Flush mounted, screwdriver operated cam. Optional – Allen key, cylinder key, paddle latch, or vandal resistant (lock only) latch. All of MIFAB's cylinder key locks are keyed alike.

Packaging: Individual pack.



"B" x "A"	WALL OPENING	SHIP WEIGHT (Lbs.)	LATCHES	MILD STEEL MODEL #	STAINLESS STEEL MODEL #
8" x 8"	8 3/16" x 8 3/16"	4.0	1	○ CAD-FL0808	○ CAD-FLSS0808
8" x 12"	8 3/16" x 12 3/16"	5.0	1	○ CAD-FL0812	○ CAD-FLSS0812
10" x 10"	10 3/16" x 10 3/16"	5.5	1	○ CAD-FL1010	○ CAD-FLSS1010
12" x 12"	12 3/16" x 12 3/16"	6.0	1	○ CAD-FL1212	○ CAD-FLSS1212
12" x 16"	12 3/16" x 16 3/16"	7.0	1	○ CAD-FL1216	○ CAD-FLSS1216
12" x 18"	12 3/16" x 18 3/16"	8.0	1	○ CAD-FL1218	○ CAD-FLSS1218
12" x 24"	12 3/16" x 24 3/16"	11.4	3	○ CAD-FL1224	○ CAD-FLSS1224
14" x 14"	14 3/16" x 14 3/16"	7.8	1	○ CAD-FL1414	○ CAD-FLSS1414
16" x 16"	16 3/16" x 16 3/16"	9.6	1	○ CAD-FL1616	○ CAD-FLSS1616
16" x 20"	16 3/16" x 20 3/16"	11.4	1	○ CAD-FL1620	○ CAD-FLSS1620
18" x 18"	18 3/16" x 18 3/16"	11.4	3	○ CAD-FL1818	○ CAD-FLSS1818
18" x 24"	18 3/16" x 24 3/16"	15.9	3	○ CAD-FL1824	○ CAD-FLSS1824
20" x 24"	20 3/16" x 24 3/16"	17.0	3	○ CAD-FL2024	○ CAD-FLSS2024
20" x 30"	20 3/16" x 30 3/16"	19.0	5	○ CAD-FL2030	○ CAD-FLSS2030
24" x 24"	24 3/16" x 24 3/16"	18.3	3	○ CAD-FL2424	○ CAD-FLSS2424
24" x 30"	24 3/16" x 30 3/16"	20.0	5	○ CAD-FL2430	○ CAD-FLSS2430
24" x 36"	24 3/16" x 36 3/16"	24.5	5	○ CAD-FL2436	○ CAD-FLSS2436
30" x 30"	30 3/16" x 30 3/16"	24.5	5	○ CAD-FL3030	○ CAD-FLSS3030
36" x 36"	36 3/16" x 36 3/16"	28.0	5	○ CAD-FL3636	○ CAD-FLSS3636

A-B Door Size


C-D Overall Dimensions - Door Size - Plus 2 1/4" (57)

E-F Wall Opening - Door Size - Plus 1/2" (13)

(Dimension) Denotes Millimetres

NOTE: The hinge is always furnished on the "A" or height (longer) dimension, unless otherwise specified.

SUFFIX	OPTIONAL VARIATIONS
☐ -A	Allen key lock
☐ -BA	Buy American Act compliant product
☐ -C	Cylinder key lock
☐ -PA	Pennsylvania Steel Act compliant product
☐ -PL	Paddle latch
☐ -VP	Vandal resistant hardware (VP Screwdriver included)

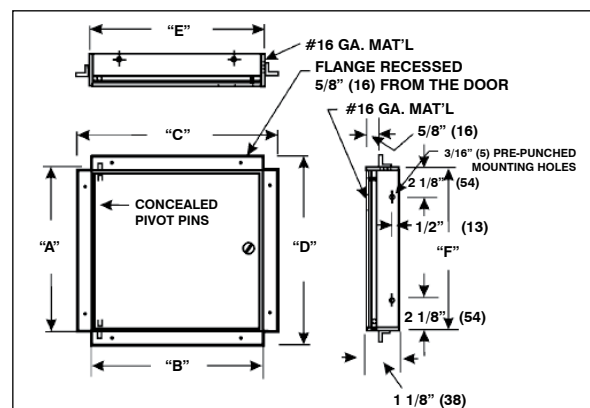

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____