

Location: _____




F1100-90

**FLOOR DRAIN WITH SIDE OUTLET
FOR NON-MEMBRANE FLOOR AREAS**

Specification: MIFAB® Series F1100-90 lacquered cast iron floor drain with anchor flange, weepholes, threaded side outlet, and standard reinforced (specify diameter), (specify strainer finish) strainer. (For membrane floors, use MIFAB F1100-C-90 Series).

Function: Used in showers, kitchens, restrooms and other non-membrane finished areas where shallow side outlet body connection is required. Round adjustable strainer is used for all types of poured finished floors.

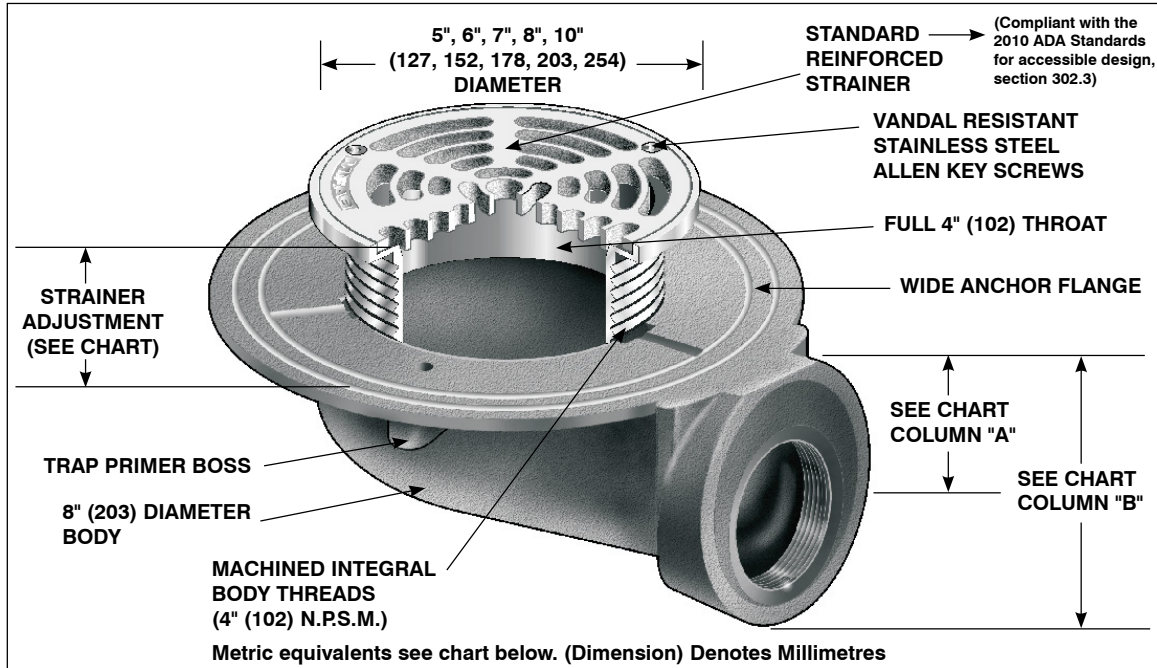

PARTS:



A1-(*): T-90
(*) Denotes Outlet Connection Size (2", 3" or 4")



(*)-(**)
(*) Denotes Strainer Diameter (5", 6", 7", 8" or 10")
(**) Denotes Strainer Finish (-1, -3 or -4)

F1100-90 Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING				PIPE SIZE	BODY HEIGHT	
			FREE AREA	LOAD RATING				A	B
	MIN	MAX		N.B. (-1)	S.S. (-3)	D.I. (-4)			
5" (127) ○	1/2" (13)	1 1/2" (38)	8 in ² (5200 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	UP TO 7,499 LBS.	2" (51) ○ 3" (76) ○ 4" (102) ○	2 15/16" (75)	3 7/8" (98)
6" (152) ○	11/16" (17)	1 1/2" (38)	9 in ² (5800 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	--		3" (76)	4 3/8" (111)
7" (178) ○	9/16" (14)	1 9/16" (40)	12 in ² (7700 ²)	UP TO 2,000 LBS.	5000-7499 LBS.	--		4" (102)	4 3/8" (111)
8" (203) ○	11/16" (32)	2 1/4" (57)	18 in ² (11600 ²)	--	5000-7499 LBS.	UP TO 10000 LBS.			
10" (254) ○	1 1/16" (17)	2 1/4" (57)	26 in ² (17170 ²)	--	5000-7499 LBS.	--			

SUFFIX OPTIONAL VARIATIONS

- ☐ -1 Nickel bronze strainer (standard)
- ☐ -3 Stainless steel strainer
- ☐ -4 Ductile iron strainer (5", 8" only)
- ☐ -5 Sediment bucket
- ☐ -6 Security screws (T-20 Torx & pin)
- ☐ -7 1/2" trap seal primer connection
- ☐ -8 Backwater valve (2", 3", 4")
- ☐ -11 Acid resistant epoxy coated body
- ☐ -13 Galvanized body
- ☐ -15 Extension
- ☐ -21 Secondary flat stainless steel strainer (2", 3", 4")
- ☐ -34 Closure plug
- ☐ -40 Underdeck clamp
- ☐ -41 Sump receiver
- ☐ -49 Chrome plated strainer

SUFFIX OPTIONAL VARIATIONS

- ☐ -50 Lacquered cast iron funnel
- ☐ -90 Threaded side outlet (2", 3", 4") (cast iron only)
- ☐ -95 Client logo
- ☐ -BA Buy American Act compliant product
- ☐ -C Membrane clamp for low rough-in (min. 1/2" (13))
- ☐ -C2 High rough-in membrane clamp (min. 1 9/16" (40))
- ☐ -F4 4" Round funnel
- ☐ -F6 6" Round funnel
- ☐ -G Oval 4" x 9" funnel
- ☐ -J 6" x 3" x 1" funnel
- ☐ -MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
- ☐ -NH No hub side outlet
- ☐ P Push on outlet
- ☐ -PA Pennsylvania Steel Act compliant product
- ☐ -Z Extended wide elastomeric flange

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____