

Location: \_\_\_\_\_




# F1100-C-Z

## FLOOR DRAIN WITH ELASTOMERIC FLANGE FOR MEMBRANE FLOOR AREAS

**Specification:** MIFAB® Series F1100-C-Z 13 1/4" (337) diameter elastomeric flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and standard reinforced 5" (102) diameter (specify material finish) strainer. (For non-membrane floors, use MIFAB F1100-Z Series.)

**Function:** Used in showers, kitchens, restrooms and other membrane finished areas. Four inch wide cast iron anchor flange provides large surface area for traffic bearing deck covering. Integral flange is set 1/8" below grate. Membrane clamp is provided to secure the waterproofing membrane.

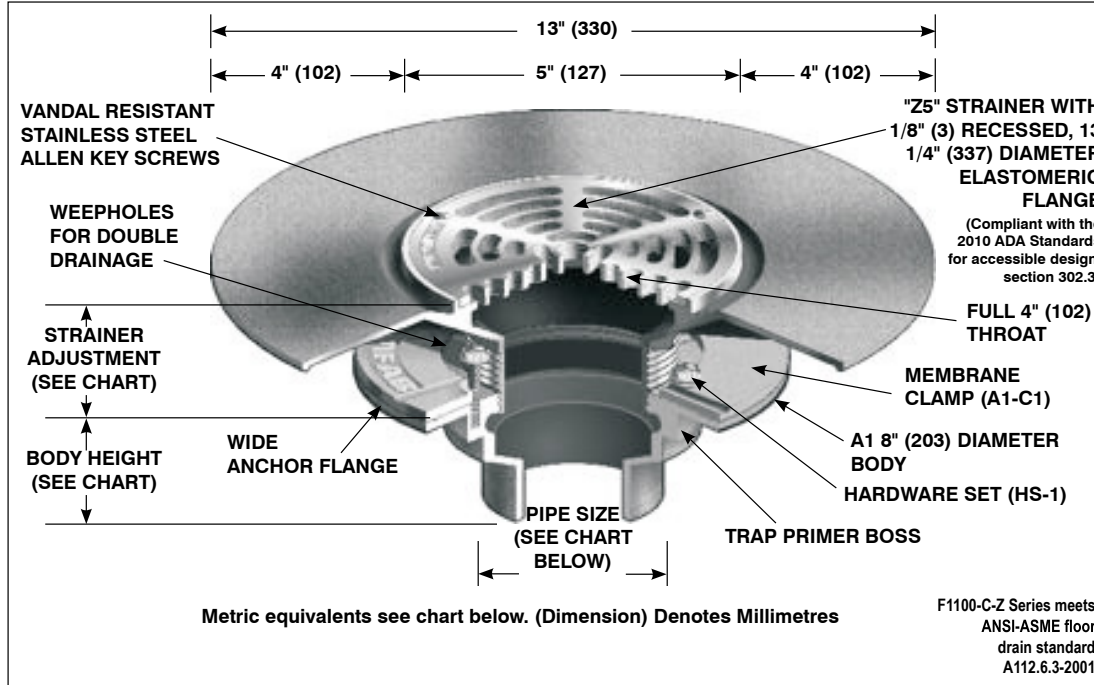

### PARTS:



A1 BODY



Z5-(\*)  
(\*) Denotes Strainer Finish (-1 or -3)



A1-C1



HS-1

| STRAINER<br>DIAMETER | STRAINER<br>ADJUSTMENT |             | ANSI/ASME RATING                          |                        |                       | PIPE<br>SIZE | BODY HEIGHT          |                |                 |                     |                        |
|----------------------|------------------------|-------------|-------------------------------------------|------------------------|-----------------------|--------------|----------------------|----------------|-----------------|---------------------|------------------------|
|                      |                        |             | FREE<br>AREA                              | LOAD RATING            |                       |              | NO HUB<br>(STANDARD) | PUSH<br>ON (P) | THREADED<br>(T) | INSIDE<br>CAULK (X) | PVC/ABS<br>(-30)/(-31) |
|                      | N.B. (-1)              | S.S. (-3)   |                                           |                        |                       |              |                      |                |                 |                     |                        |
| 5" (127)             | 1/2" (13)              | 1 1/2" (38) | 8 in <sup>2</sup><br>(5200 <sup>2</sup> ) | UP TO<br>2,000<br>LBS. | 5000-<br>7499<br>LBS. | 2" (51)      | 3" (76)              | 3 3/8" (86)    | 2 1/4" (57)     | 3 3/4" (95)         | 2 15/16" (75)          |
|                      |                        |             |                                           |                        |                       | 3" (76)      | 3" (76)              | 3 3/8" (86)    | 2 5/8" (67)     | 3 3/4" (95)         | 3 3/4" (95)            |
|                      |                        |             |                                           |                        |                       | 4" (102)     | 3" (76)              | 3 3/8" (86)    | 2 5/8" (67)     | 3 3/4" (95)         | 3 3/4" (95)            |
|                      |                        |             |                                           |                        |                       | 5" (127)     | 3" (76)              | --             | 2 5/8" (67)     | 3 3/4" (95)         | --                     |
|                      |                        |             |                                           |                        |                       | 6" (152)     | 3 1/4" (83)          | 6 1/2" (165)   | --              | --                  | --                     |

### SUFFIX OPTIONAL VARIATIONS

- 1 Nickel bronze strainer (standard)
- 3 Stainless steel strainer
- 4 Ductile iron strainer (5", 8" only)
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 13 Galvanized body
- 15 Extension
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body
- 31 ABS socket connection body
- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver

### SUFFIX OPTIONAL VARIATIONS

- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo
- BA Buy American Act compliant product
- C2 High rough-in membrane clamp (min. 1 9/16" (40))
- F4 4" Round funnel
- F6 6" Round funnel
- (Standard) No hub outlet
- G Oval 4" x 9" funnel
- J 6" x 3" x 1" funnel
- MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_