


Location: **F1100-Z**
**FLOOR DRAIN WITH ELASTOMERIC  
FLANGE FOR NON-MEMBRANE FLOOR AREAS**

**Specification:** MIFAB Series F1100-Z lacquered cast iron floor drain with anchor flange, weepholes, and 1/8" (3) recessed, 13 1/4" (337) diameter elastomeric flange, with standard reinforced 5" (102) diameter (specify material finish) strainer.  
(For membrane floors, use MIFAB F1100-C-Z Series.)

**Function:** Used in showers, kitchens, restrooms and other non-membrane finished areas. Four inch wide cast iron anchor flange provides large surface area for traffic bearing deck covering. Integral flange is set 1/8" below grate.

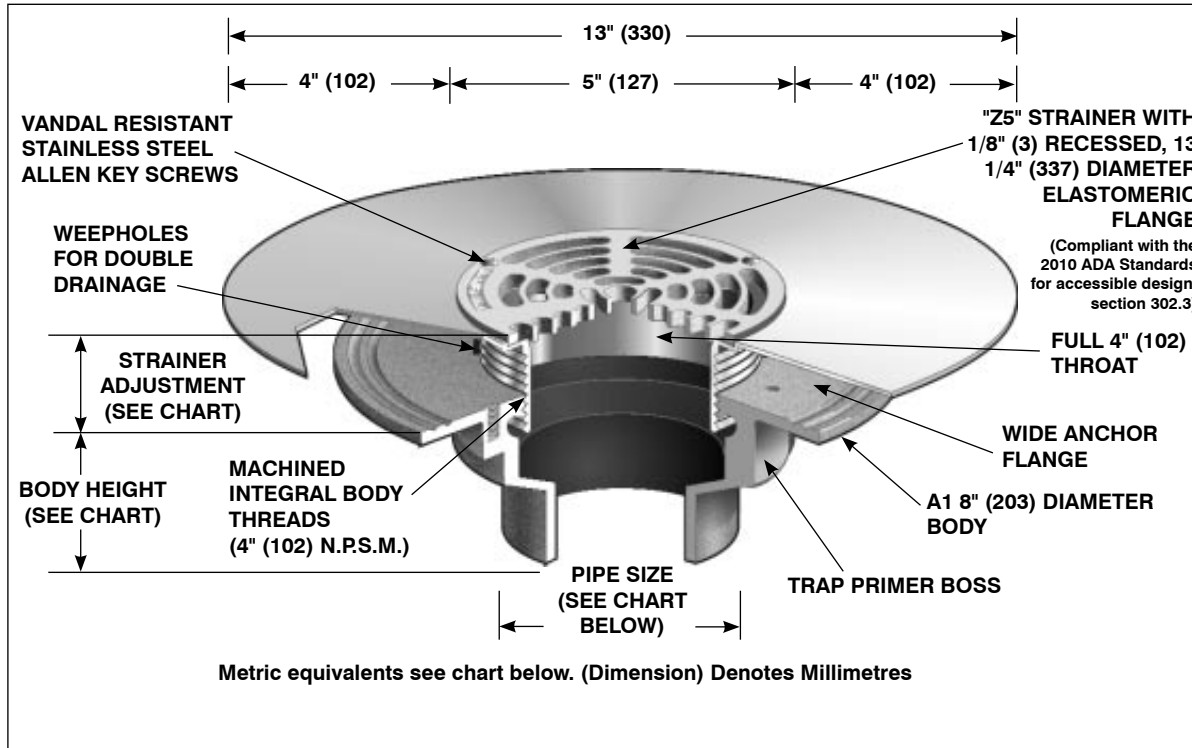

F1100-Z Series meets  
ANSI-ASME floor  
drain standard  
A112.6.3-2001

| STRAINER<br>DIAMETER                                                                         | STRAINER<br>ADJUSTMENT |             | ANSI/ASME RATING                          |                        |                       | PIPE<br>SIZE                                                                                 | BODY HEIGHT                                                                                     |                                                                                                  |                                                                                                 |                                                                                                 |                                                                                                   |  |  |
|----------------------------------------------------------------------------------------------|------------------------|-------------|-------------------------------------------|------------------------|-----------------------|----------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|--|--|
|                                                                                              |                        |             | FREE<br>AREA                              | LOAD RATING            |                       |                                                                                              | NO HUB<br>(STANDARD)                                                                            | PUSH<br>ON (P)                                                                                   | THREADED<br>(T)                                                                                 | INSIDE<br>CAULK (X)                                                                             | PVC/ABS<br>(-30)/(-31)                                                                            |  |  |
|                                                                                              | MIN                    | MAX         |                                           | N.B. (-1)              | S.S. (-3)             |                                                                                              |                                                                                                 |                                                                                                  |                                                                                                 |                                                                                                 |                                                                                                   |  |  |
| 5" (127)  | 1/2" (13)              | 1 1/2" (38) | 8 in <sup>2</sup><br>(5200 <sup>2</sup> ) | UP TO<br>2,000<br>LBS. | 5000-<br>7499<br>LBS. | 2" (51)   | 3" (76)      | 3 3/8" (86)   | 2 1/4" (57)  | 3 3/4" (95)  | 2 15/16" (75)  |  |  |
|                                                                                              |                        |             |                                           |                        |                       | 3" (76)   | 3" (76)      | 3 3/8" (86)   | 2 5/8" (67)  | 3 3/4" (95)  | 3 3/4" (95)    |  |  |
|                                                                                              |                        |             |                                           |                        |                       | 4" (102)  | 3" (76)      | 3 3/8" (86)   | 2 5/8" (67)  | 3 3/4" (95)  | 3 3/4" (95)    |  |  |
|                                                                                              |                        |             |                                           |                        |                       | 5" (127)  | 3" (76)      | --            | 2 5/8" (67)  | 3 3/4" (95)  | --             |  |  |
|                                                                                              |                        |             |                                           |                        |                       | 6" (152)  | 3 1/4" (83)  | 6 1/2" (165)  | --           | --           | --             |  |  |

**SUFFIX OPTIONAL VARIATIONS**

- ☐ -1 Nickel bronze strainer
- ☐ -3 Stainless steel strainer
- ☐ -5 Sediment bucket
- ☐ -6 Security screws (T-20 Torx & pin)
- ☐ -7 1/2" trap seal primer connection
- ☐ -8 Backwater valve (2", 3", 4")
- ☐ -11 Acid resistant epoxy coated body
- ☐ -13 Galvanized body
- ☐ -15 Extension
- ☐ -21 Secondary flat stainless steel strainer (2", 3", 4")
- ☐ -28 Stainless steel body (Type 304)
- ☐ -30 PVC socket connection body

**SUFFIX OPTIONAL VARIATIONS**

- ☐ -31 ABS socket connection body
- ☐ -34 Closure plug
- ☐ -40 Underdeck clamp
- ☐ -41 Sump receiver
- ☐ -90 Threaded side outlet (2", 3", 4") (cast iron only)
- ☐ -90NH No hub side outlet (2", 3", 4") (cast iron only)
- ☐ -95 Client logo
- ☐ -BA Buy American Act compliant product
- ☐ -C Membrane clamp for low rough-in (min. 1/2" (13))

**SUFFIX OPTIONAL VARIATIONS**

- ☐ -C2 High rough-in membrane clamp (min. 1 9/16" (40))
- ☐ -F4 4" Round funnel
- ☐ -F6 6" Round funnel
- ☐ (Standard) No hub outlet
- ☐ -G Oval 4" x 9" funnel
- ☐ -J 6" x 3" x 1" funnel
- ☐ P Push on outlet
- ☐ -PA Pennsylvania Steel Act compliant product
- ☐ T Threaded outlet (2", 3", 4")
- ☐ X Inside caulk outlet
- ☐ -Z Extended wide elastomeric flange

Job Name:

Section No:

Schedule No:

Page No:

Contract:

Purchase Order No: