

Location: _____




F1100-C-ZS

FLOOR DRAIN WITH SQUARE STRAINER AND ELASTOMERIC FLANGE MEMBRANE FLOOR AREAS

Specification: MIFAB® Series F1100-C-ZS lacquered cast iron floor drain with anchor flange and 1/8" (3) recessed, 13 1/4" (337) square elastomeric flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, and standard reinforced 6" x 6" (152 x 152) square strainer. (For non-membrane floors, use MIFAB F1100-ZS Series.)

Function: Used in showers, kitchens, restrooms and other membrane finished areas. Wide cast iron anchor flange provides large surface area for traffic bearing deck covering. Integral flange is set 1/8" below grate. Square adjustable strainer is used for floors that are finished of material or straight line patterns. Membrane clamp is provided to secure the waterproofing membrane.

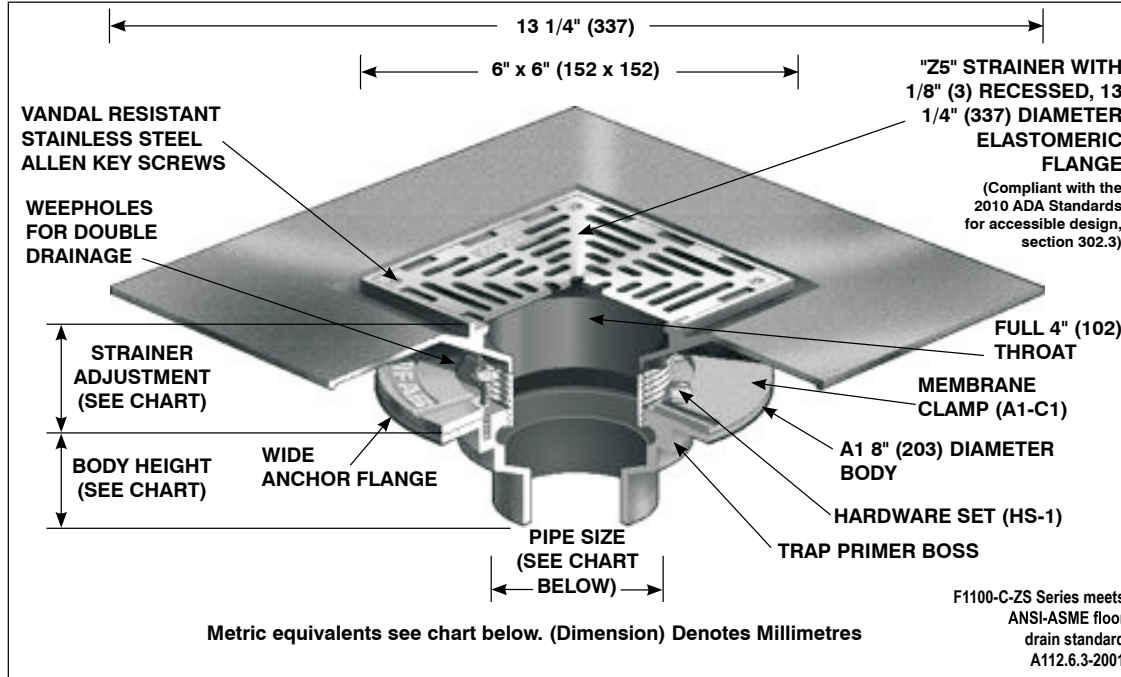

PARTS:



A1 BODY



ZS-(-)
(*) Denotes Strainer Finish (-1 or -3)



A1-C1



HS-1

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING			PIPE SIZE	BODY HEIGHT					
			FREE AREA	LOAD RATING			NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)	
	MIN	MAX		N.B. (-1)	S.S. (-3)							
6" x 6"○ (152 x 152)	7/8" (22)	1 9/16" (40)	12 in² (7700²)	UP TO 2,000 LBS.	5000- 7499 LBS.	2" (51) ○	3" (76) ☐	3 3/8" (86) ☐	2 1/4" (57) ☐	3 3/4" (95) ☐	2 15/16" (75) ☐	
						3" (76) ○	3" (76) ☐	3 3/8" (86) ☐	2 5/8" (67) ☐	3 3/4" (95) ☐	3 3/4" (95) ☐	
						4" (102) ○	3" (76) ☐	3 3/8" (86) ☐	2 5/8" (67) ☐	3 3/4" (95) ☐	3 3/4" (95) ☐	
						5" (127) ○	3" (76) ☐	-- ☐	2 5/8" (67) ☐	3 3/4" (95) ☐	-- ☐	
						6" (152) ○	3 1/4" (83) ☐	6 1/2" (165) ☐	-- ☐	-- ☐	-- ☐	

SUFFIX OPTIONAL VARIATIONS

☐ -1	Nickel bronze strainer (standard)
☐ -3	Stainless steel strainer
☐ -5	Sediment bucket
☐ -6	Security screws (T-20 Torx & pin)
☐ -7	1/2" trap seal primer connection
☐ -8	Backwater valve (2", 3", 4")
☐ -11	Acid resistant epoxy coated body
☐ -13	Galvanized body
☐ -15	Extension
☐ -21	Secondary flat stainless steel strainer (2", 3", 4")
☐ -28	Stainless steel body (Type 304)
☐ -30	PVC socket connection body
☐ -31	ABS socket connection body
☐ -34	Closure plug
☐ -40	Underdeck clamp
☐ -41	Sump receiver
☐ -90	Threaded side outlet (2", 3", 4") (cast iron only)

SUFFIX OPTIONAL VARIATIONS

☐ -90NH	No hub side outlet (2", 3", 4") (cast iron only)
☐ -95	Client logo
☐ -BA	Buy American Act compliant product
☐ -C2	High rough-in membrane clamp (min. 1 9/16" (40))
☐ -F4	4" Round funnel
☐ -F6	6" Round funnel
☐ (Standard)	No hub outlet
☐ -G	Oval 4" x 9" funnel
☐ -J	6" x 3" x 1" funnel
☐ -MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
☐ P	Push on outlet
☐ -PA	Pennsylvania Steel Act compliant product
☐ T	Threaded outlet (2", 3", 4")
☐ X	Inside caulk outlet
☐ -Z	Extended wide elastomeric flange

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____