

Location: _____




F1100-ZS

FLOOR DRAIN WITH SQUARE STRAINER AND ELASTOMERIC FLANGE FOR NON-MEMBRANE FLOOR AREAS

Specification: MIFAB® Series F1100-ZS lacquered cast iron floor drain with anchor flange, weepholes, and 1/8" (3) recessed, 13 1/4" (337) square elastomeric flange, with standard reinforced 6" x 6" (152 x 152) square (specify strainer finish) strainer. (For membrane floors, use MIFAB F1100-C-ZS Series.)

Function: Used in showers, kitchens, restrooms and other non-membrane finished areas. Wide cast iron anchor flange provides large surface area for traffic bearing deck covering. Integral flange is set 1/8" below grate. Square adjustable strainer is used for floors that are finished of material or straight line patterns.

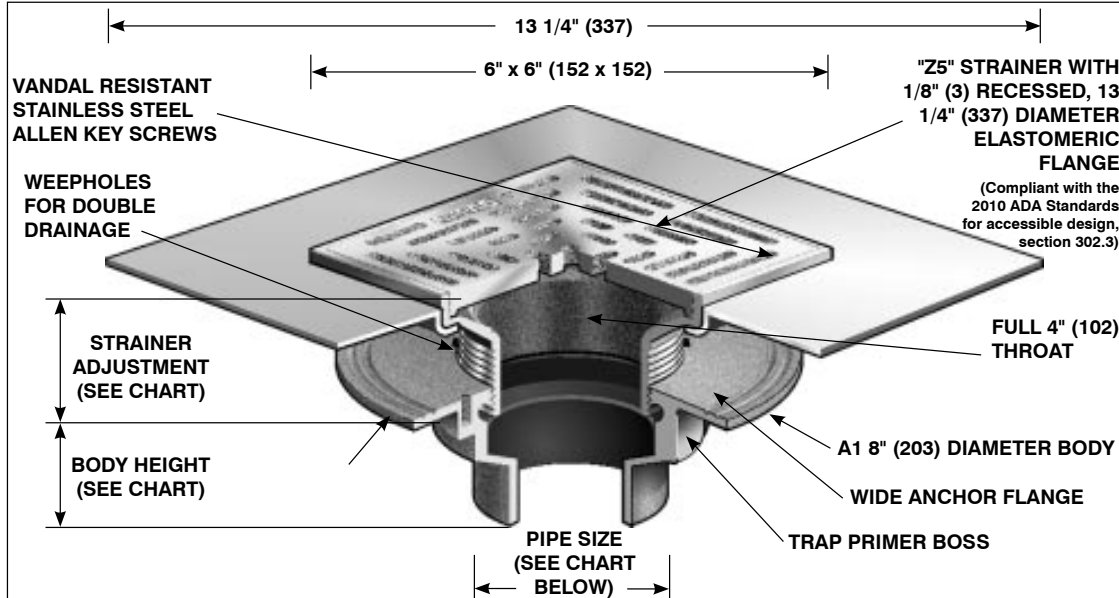

Metric equivalents see chart below. (Dimension) Denotes Millimetres

PARTS:



A1 BODY



ZS-(-)
(*) Denotes Strainer Finish (-1 or -3)

F1100-ZS Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING			PIPE SIZE	BODY HEIGHT					
			FREE AREA	LOAD RATING			NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)	
	N.B. (-1)	S.S. (-3)										
6" x 6"○ (152 x 152)	7/8" (22)	1 9/16" (40)	12 in² (7700²)	UP TO 2,000 LBS.	5000- 7499 LBS.	2" (51) ○	3" (76) ☐	3 3/8" (86) ☐	2 1/4" (57) ☐	3 3/4" (95) ☐	2 15/16" (75) ☐	
						3" (76) ○	3" (76) ☐	3 3/8" (86) ☐	2 5/8" (67) ☐	3 3/4" (95) ☐	3 3/4" (95) ☐	
						4" (102) ○	3" (76) ☐	3 3/8" (86) ☐	2 5/8" (67) ☐	3 3/4" (95) ☐	3 3/4" (95) ☐	
						5" (127) ○	3" (76) ☐	-- ☐	2 5/8" (67) ☐	3 3/4" (95) ☐	-- ☐	
						6" (152) ○	3 1/4" (83) ☐	6 1/2" (165) ☐	-- ☐	-- ☐	-- ☐	

SUFFIX OPTIONAL VARIATIONS

- ☐ -1 Nickel bronze strainer
- ☐ -3 Stainless steel strainer
- ☐ -5 Sediment bucket
- ☐ -6 Security screws (T-20 Torx & pin)
- ☐ -7 1/2" trap seal primer connection
- ☐ -8 Backwater valve (2", 3", 4")
- ☐ -11 Acid resistant epoxy coated body
- ☐ -13 Galvanized body
- ☐ -15 Extension
- ☐ -21 Secondary flat stainless steel strainer (2", 3", 4")
- ☐ -28 Stainless steel body (Type 304)
- ☐ -30 PVC socket connection body
- ☐ -31 ABS socket connection body
- ☐ -34 Closure plug
- ☐ -40 Underdeck clamp
- ☐ -41 Sump receiver
- ☐ -90 Threaded side outlet (2", 3", 4") (cast iron only)

SUFFIX OPTIONAL VARIATIONS

- ☐ -90NH No hub side outlet (2", 3", 4") (cast iron only)
- ☐ -95 Client logo
- ☐ -BA Buy American Act compliant product
- ☐ -C Membrane clamp for low roughin (min. 1/2" (13))
- ☐ -C2 High rough-in membrane clamp (min. 1 9/16" (40))
- ☐ -F4 4" Round funnel
- ☐ -F6 6" Round funnel
- ☐ (Standard) No hub outlet
- ☐ -G Oval 4" x 9" funnel
- ☐ -J 6" x 3" x 1" funnel
- ☐ -MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
- ☐ P Push on outlet
- ☐ -PA Pennsylvania Steel Act compliant product
- ☐ T Threaded outlet (2", 3", 4")
- ☐ X Inside caulk outlet
- ☐ -Z Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____