

Location: _____




F1100-DD

**HUB DRAIN FOR
NON-MEMBRANE FLOOR AREAS**

Specification: MIFAB® Series F1100-DD lacquered cast iron hub drain with anchor flange, weepholes, and (specify strainer finish) indirect waste hub. (For membrane floors, use MIFAB F1100-C-DD Series.)

Function: Used in restaurants, hospitals, industrial laboratories, and other non-membrane finished areas where indirect waste lines above the floor drip condensate or waste water into the hub.

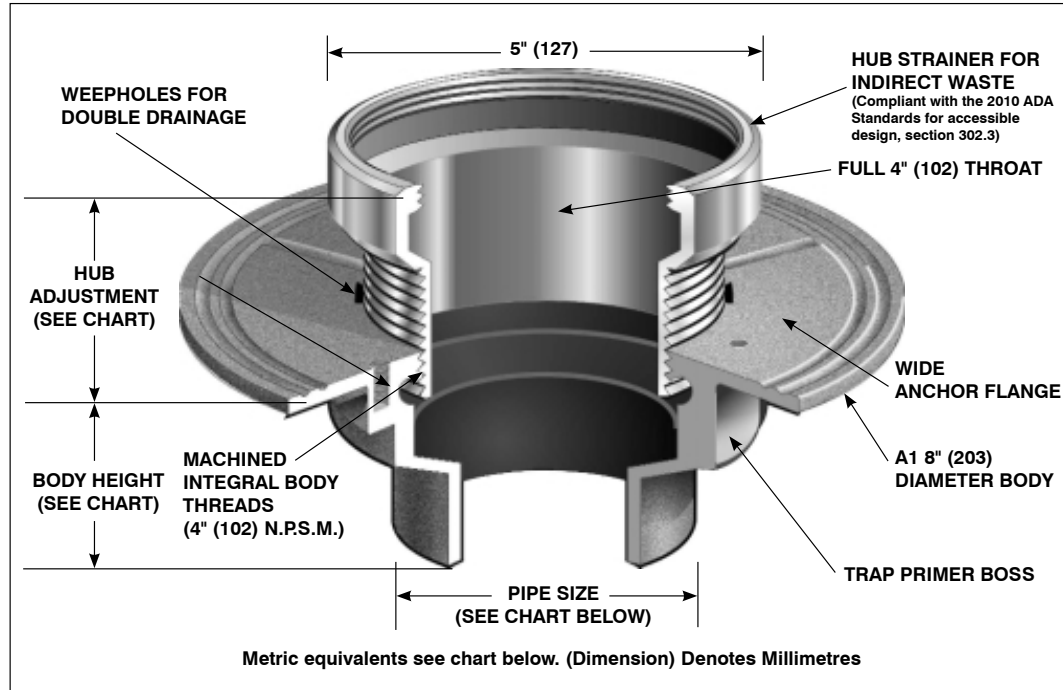

PARTS:



A1 BODY



DD-(-)
(-) Denotes strainer finish (-1, -3 or -50)

F1100-DD Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

HUB ADJUSTMENT		PIPE SIZE	BODY HEIGHT				
			NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
1 1/2" (38)	2 5/8" (66)	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
		3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
		4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
		5" (127)	3" (76)	--	2 5/8" (67)	3 3/4" (95)	--
		6" (152)	3 1/4" (83)	6 1/2" (165)	--	--	--

SUFFIX OPTIONAL VARIATIONS

-1 Nickel bronze strainer (standard)
-3 Stainless steel strainer
-5 Sediment bucket
-6 Security screws (T-20 Torx & pin)
-7 1/2" trap seal primer connection
-8 Backwater valve (2", 3", 4")
-11 Acid resistant epoxy coated body
-13 Galvanized body
-15 Extension
-21 Secondary flat stainless steel strainer (2", 3", 4")
-28 Stainless steel body (Type 304)
-30 PVC socket connection body
-31 ABS socket connection body
-34 Closure plug
-40 Underdeck clamp
-41 Sump receiver

SUFFIX OPTIONAL VARIATIONS

-49 Chrome Plated Strainer
-90 Threaded side outlet (2", 3", 4") (cast iron only)
-90NH No hub side outlet (2", 3", 4") (cast iron only)
-95 Client logo
-BA Buy American Act compliant product
-C Membrane clamp for low rough-in (min. 1/2" (13))
-C2 High rough-in membrane clamp (min. 1 9/16" (40))
(Standard) No hub outlet
-MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
P Push on outlet
-PA Pennsylvania Steel Act compliant product
T Threaded outlet (2", 3", 4")
X Inside caulk outlet
-Z Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____