

Location: _____




F1100-X

**FLOOR DRAIN WITH HEAVY DUTY STRAINER
FOR NON-MEMBRANE FLOOR AREAS**

Specification: MIFAB® Series F1100-X lacquered cast iron floor drain with anchor flange, weepholes, and standard heavy duty (specify diameter) (specify material finish) strainer. (For membrane floors, use MIFAB F1100-C-X Series.)

Function: Used in showers, kitchens, restrooms and other non-membrane finished areas where heavy wheeled loads are expected and a heavy duty rated strainer is required. Round adjustable strainer is used for all types of poured finished floors.

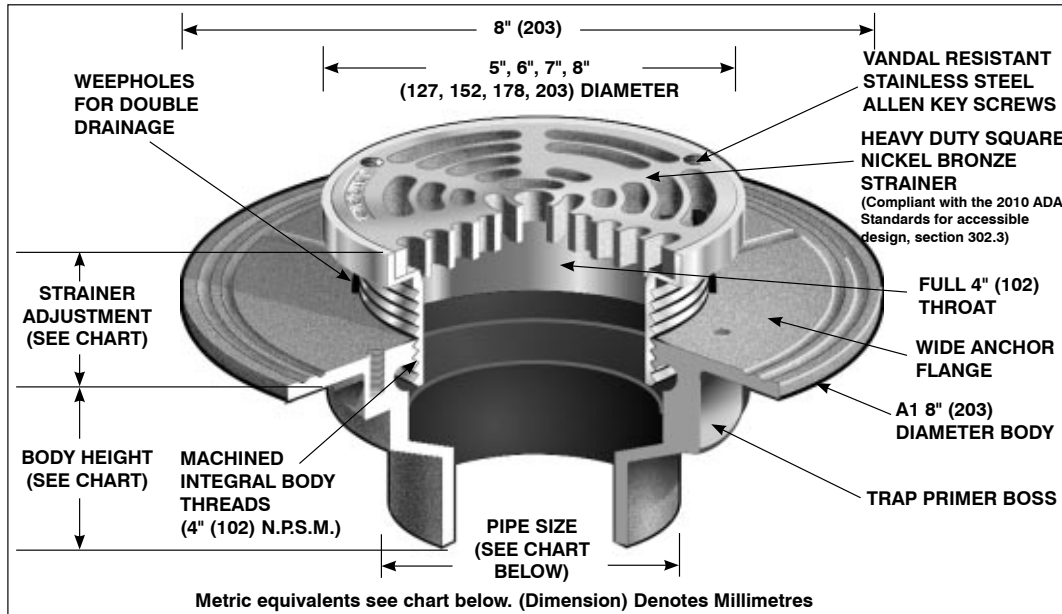

PARTS:



A1 BODY



X(*)-(**)
(*) Denotes Strainer Size (5", 6", 7", 8" or 10")
(**) Denotes Strainer Finish (-1, -3 or -4)

F1100-X Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING				PIPE SIZE	BODY HEIGHT					
			FREE AREA	LOAD RATING				NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)	
	N.B. (-1)	S.S. (-3)		D.I. (-4)									
5" (127) ○	1/2" (13)	1 1/2" (38)	8 in ² (5200 ²)	UP TO 7,499 LBS.	5000-7499 LBS.	OVER 10,000 LBS.	2" (51) ○	3" (76) □	3 3/8" (86) □	2 1/4" (57) □	3 3/4" (95) □	2 15/16" (75) □	
6" (152) ○	11/16" (17)	1 1/2" (38)	9 in ² (5800 ²)	UP TO 7,499 LBS.	5000-7499 LBS.	--	3" (76) ○	3" (76) □	3 3/8" (86) □	2 5/8" (67) □	3 3/4" (95) □	3 3/4" (95) □	
7" (178) ○	9/16" (14)	1 9/16" (40)	12 in ² (7700 ²)	UP TO 7,499 LBS.	5000-7499 LBS.	--	4" (102) ○	3" (76) □	3 3/8" (86) □	2 5/8" (67) □	3 3/4" (95) □	3 3/4" (95) □	
8" (203) ○	11/16" (32)	2 1/4" (57)	18 in ² (11600 ²)	UP TO 7,499 LBS.	5000-7499 LBS.	OVER 10,000 LBS.	5" (127) ○	3" (76) □	-- □	2 5/8" (67) □	3 3/4" (95) □	-- □	
10" (254) ○	1 1/16" (17)	2 1/4" (57)	26 in ² (17170 ²)	UP TO 7,499 LBS.	5000-7499 LBS.	--	6" (152) ○	3 1/4" (83) □	6 1/2" (165) □	-- □	-- □	-- □	

SUFFIX OPTIONAL VARIATIONS

- ☐ -1 Nickel bronze strainer (standard)
- ☐ -3 Stainless steel strainer
- ☐ -4 Ductile iron strainer (5", 8" only)
- ☐ -5 Sediment bucket
- ☐ -6 Security screws (T-20 Torx & pin)
- ☐ -7 1/2" trap seal primer connection
- ☐ -8 Backwater valve (2", 3", 4")
- ☐ -11 Acid resistant epoxy coated body
- ☐ -13 Galvanized body
- ☐ -15 Extension
- ☐ -21 Secondary flat stainless steel strainer (2", 3", 4")
- ☐ -28 Stainless steel body (Type 304)
- ☐ -30 PVC socket connection body
- ☐ -31 ABS socket connection body
- ☐ -34 Closure plug
- ☐ -40 Underdeck clamp
- ☐ -41 Sump receiver

SUFFIX OPTIONAL VARIATIONS

- ☐ -49 Chrome plated strainer
- ☐ -50 Lacquered cast iron funnel
- ☐ -90 Threaded side outlet (2", 3", 4") (cast iron only)
- ☐ -90NH No hub side outlet (2", 3", 4") (cast iron only)
- ☐ -9A Client logo
- ☐ -BA Buy American Act compliant product
- ☐ -C2 High rough-in membrane clamp (min. 1 9/16" (40))
- ☐ -F4 4" Round funnel
- ☐ -F6 6" Round funnel
- ☐ (Standard) No hub outlet
- ☐ -G Oval 4" x 9" funnel
- ☐ -J 6" x 3" x 1" funnel
- ☐ -MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
- ☐ P Push on outlet
- ☐ -PA Pennsylvania Steel Act compliant product
- ☐ T Threaded outlet (2", 3", 4")
- ☐ X Inside caulk outlet
- ☐ -Z Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____