

Location: _____




F1420-C

FLOOR DRAIN WITH 8" X 8" SQUARE ADJUSTABLE TRACTOR GRATE

Specification: MIFAB® Series F1420-C lacquered cast iron floor drain with anchor flange, cast iron clamp ring with primary and secondary weepholes for waterproofing membrane, and standard 1" (25) thick, 7 3/4" x 7 3/4" (197 x 197) square, (specify material finish) tractor grate. (For non-membrane floors, use F1420 Series.)

Function: Used in warehouses, mechanical rooms, parking garages and other membrane finished areas. 8" square, adjustable tractor grate is used with all types of poured finished floors. Membrane clamp is provided to secure the waterproofing membrane.

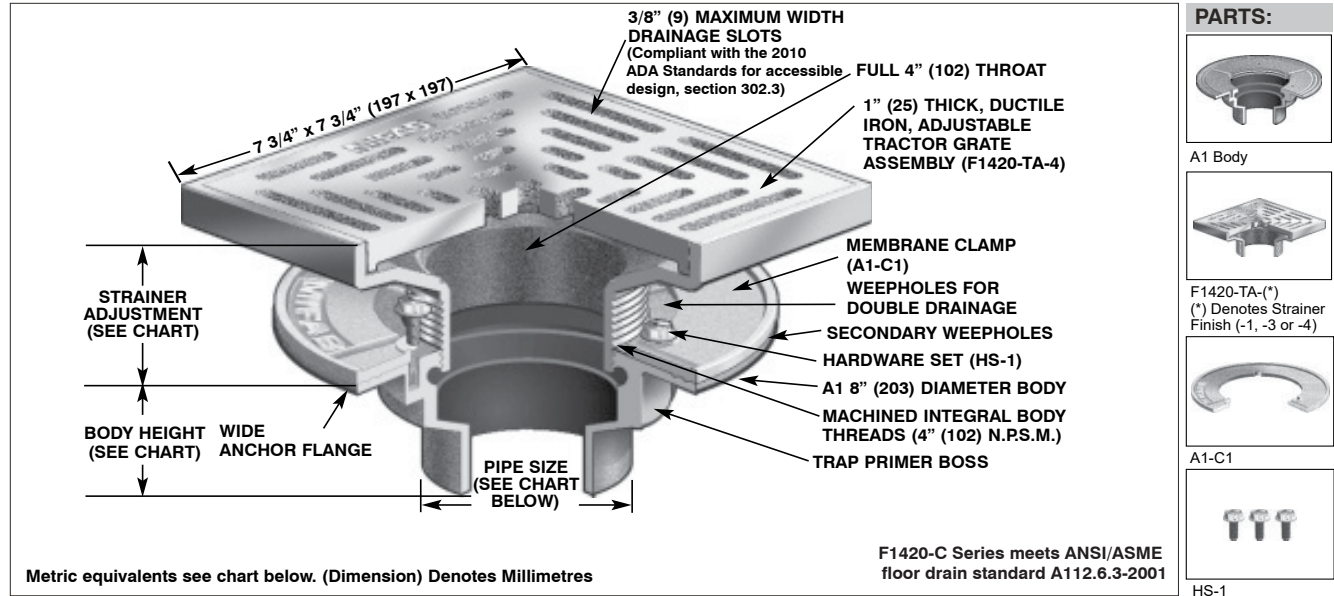

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
7 3/4" x 7 3/4" (197 x 197)	1 3/4" (44)	2 5/8" (67)	26 in² (16,800²)	ANSI/ASME LOAD CLASS "SPECIAL DUTY" (OVER 10,000 LBS.)	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
					3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					5" (127)	3" (76)	--	2 5/8" (67)	3 3/4" (95)	--
					6" (152)	3 1/4" (83)	6 1/2" (165)	--	--	--

SUFFIX	OPTIONAL VARIATIONS		
-1	Nickel bronze strainer (vener)	-41	Sump receiver
-3	Stainless steel strainer (vener)	-50	Lacquered cast iron funnel
-4	Ductile iron strainer	-90	Threaded side outlet (2", 3", 4")
-5	Sediment bucket	-90NH	No hub side outlet (2", 3", 4")
-6	Security screws (T-20 Torx & pin)	-95	Client logo
-7	1/2" trap seal primer connection	-BA	Buy American Act compliant product
-8	Backwater valve (2", 3", 4")	-F4	4" Round funnel
-11	Acid resistant epoxy coated body	-F6	6" Round funnel
-12	Galvanized top assembly	-G	Oval 4" x 9" funnel
-13	Galvanized body	-HP	Heel proof grate (1/4" maximum grate opening size, -3 only)
-15	Extension	-J	6" x 3" x 1" funnel
-21	Secondary flat stainless steel strainer (2", 3", 4")	(Standard)	No hub outlet
-28	Stainless steel body (Type 304)	-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
-30	PVC socket connection body	-P	Push on Outlet
-31	ABS socket connection body	-PA	Pennsylvania Steel Act compliant product
-32	2", 3", 4" integral deep seal trap	-T	Threaded outlet (2", 3", 4")
-34	Closure plug	-X	Inside caulk outlet
-40	Underdeck clamp	-Y	Non-adjustable top
		-Z	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____