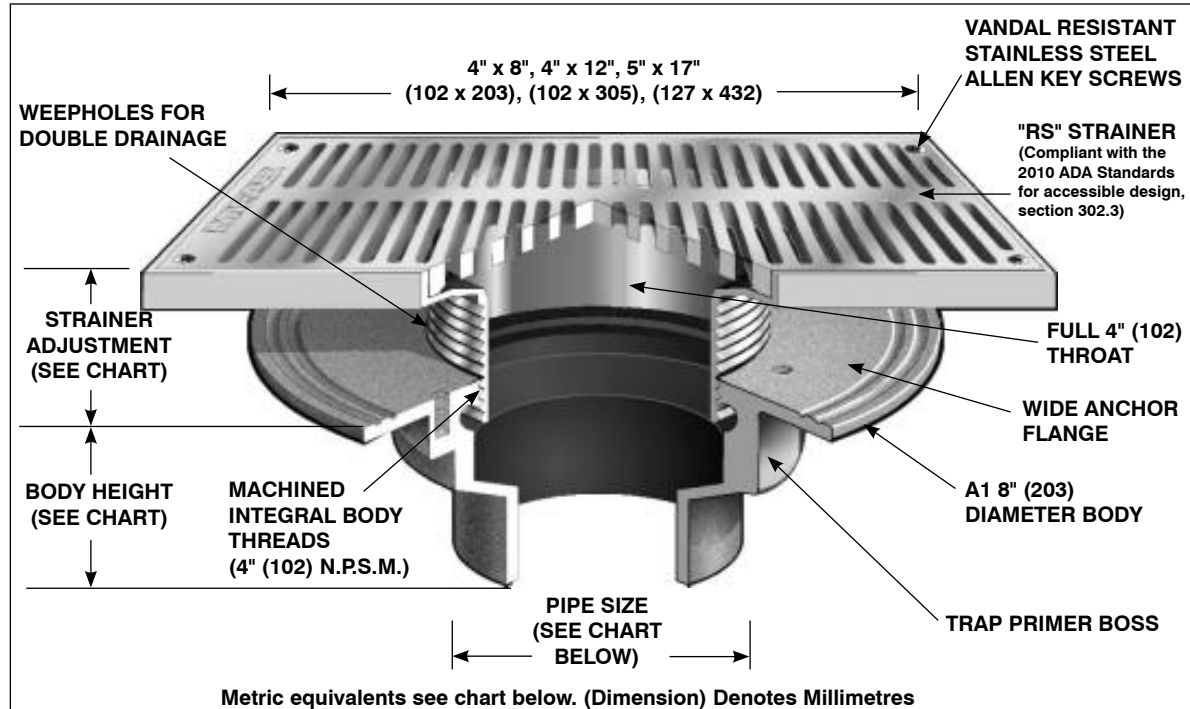



Location: **F1100-RS****FLOOR DRAIN WITH RECTANGULAR STRAINER FOR NON-MEMBRANE FLOOR AREAS**

Specification: MIFAB Series F1100-RS lacquered cast iron floor drain with anchor flange, weepholes, and "RS" (specify size) rectangular (specify material finish) strainer. (For membrane floors, use MIFAB F1100-C-RS Series.) Please note 5"x17" sized strainer available in stainless steel only. For RS48, grate style is different compared to larger model.

Function: Used in showers, gutters and other non-membrane finished areas where a large grate free area is required and limited width is available.

**PARTS:**

A1 BODY



RS48

RS(*)-(**)
(*) Denotes Strainer Size (4"x8", 4"x12", or 5"x17")
(**) Denotes Strainer Finish (-1 or -3)
(-3 only for 5" x 17")

F1100-RS Series meets
ANSI-ASME floor
drain standard
A112.6.3-2001

STRAINER SIZE	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
						NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
	MIN	MAX	FREE AREA	LOAD RATING N.B. (-1) / S.S. (-3)						
4" x 8" (102 x 203)	1 1/2" (38)	2 5/8" (66)	11.0 in ² (7096 ²)	5000 to 7499 LBS.	2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)
4" x 12" (102 x 305)	1 1/2" (38)	2 5/8" (66)	15 in ² (9677 ²)	5000 to 7499 LBS.	3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
5" x 17" (127 x 432)	1 1/2" (38)	2 5/8" (66)	18 in ² (11610 ²)	5000 to 7499 LBS.	4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)
					5" (127)	3" (76)	--	2 5/8" (67)	3 3/4" (95)	--
					6" (152)	3 1/4" (83)	6 1/2" (165)	--	--	--

SUFFIX OPTIONAL VARIATIONS

- ☐ -1 Nickel bronze strainer
- ☐ -3 Stainless steel strainer
- ☐ -5 Sediment bucket
- ☐ -6 Security screws (T-20 Torx & pin)
- ☐ -7 1/2" trap seal primer connection
- ☐ -8 Backwater valve (2", 3", 4")
- ☐ -11 Acid resistant epoxy coated body
- ☐ -13 Galvanized body
- ☐ -15 Extension
- ☐ -21 Secondary flat stainless steel strainer (2", 3", 4")
- ☐ -28 Stainless steel body (Type 304)
- ☐ -30 PVC socket connection body

SUFFIX OPTIONAL VARIATIONS

- ☐ -31 ABS socket connection body
- ☐ -34 Closure plug
- ☐ -40 Underdeck clamp
- ☐ -41 Sump receiver
- ☐ -90 Threaded side outlet (2", 3", 4") (cast iron only)
- ☐ -90NH No hub side outlet (2", 3", 4") (cast iron only)
- ☐ -95 Client logo
- ☐ -BA Buy American Act compliant product
- ☐ -C Membrane clamp for low rough-in (min. 1/2" (13))

SUFFIX OPTIONAL VARIATIONS

- ☐ -C2 High rough-in membrane clamp (min. 1 9/16" (40))
- ☐ -F4 4" Round funnel
- ☐ -F6 6" Round funnel
- ☐ (Standard) No hub outlet
- ☐ -G Oval 4" x 9" funnel
- ☐ -J 6" x 3" x 1" funnel
- ☐ P Push on outlet
- ☐ -PA Pennsylvania Steel Act compliant product
- ☐ T Threaded outlet (2", 3", 4")
- ☐ X Inside caulk outlet
- ☐ -Z Extended wide elastomeric flange

Job Name:

Section No:

Schedule No:

Page No:

Contract:

Purchase Order No: