

Location: _____




F1350

FLOOR DRAIN WITH 12" ROUND ADJUSTABLE TRACTOR GRATE AND EXTRA DEEP SUMP

Specification: MIFAB® Series F1350 lacquered cast iron floor drain with anchor flange, weepholes and adjustable collar with extra deep sump body and standard 1" (25) thick, 12" (305) round, (specify material finish) tractor grate.

Function: Used in warehouses, mechanical rooms, parking garages and other non-membrane finished areas. 12" Round, adjustable tractor grate is used with all types of poured finished floors. Deep sump body provides capacity for heavy water flow.

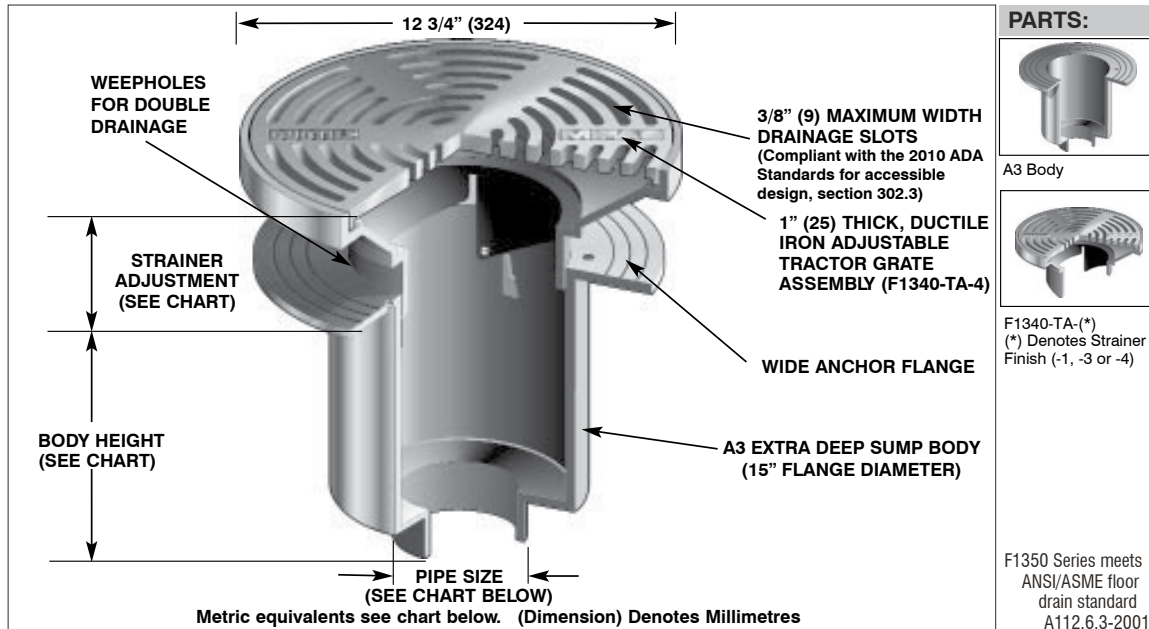

F1350 Series meets
ANSI/ASME floor
drain standard
A112.6.3-2001

STRAINER DIAMETER	STRAINER ADJUSTMENT		FREE AREA	ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX		LOAD RATING			NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
12" (305)	2 1/4" (57)	4 1/8" (105)	33 in ² (21,290 ²)	ANSI/ASME LOAD CLASS "SPECIAL DUTY" (OVER 10,000 LBS.)		2" (51) ○	12 1/4" (31) ☐	12 1/2" (318) ☐	11 1/2" (292) ☐	13" (330) ☐	12 1/8" (308) ☐
						3" (76) ○	12 1/4" (31) ☐	12 1/2" (318) ☐	11 7/8" (302) ☐	13" (330) ☐	12 5/8" (321) ☐
						4" (102) ○	12 1/4" (31) ☐	12 1/2" (318) ☐	11 7/8" (302) ☐	13" (330) ☐	12 5/8" (321) ☐
						5" (127) ○	12 1/4" (31) ☐	—	11 7/8" (302) ☐	16" (406) ☐	—
						6" (152) ○	12 1/4" (31) ☐	12 1/2" (318) ☐	—	—	—

SUFFIX	OPTIONAL VARIATIONS
☐ -1	Nickel bronze strainer (vener)
☐ -3	Stainless steel strainer (vener)
☐ -4	Ductile iron strainer
☐ -5	Sediment bucket
☐ -6	Security screws (T-20 Torx & pin)
☐ -7	1/2" trap seal primer connection
☐ -8	Backwater valve (2", 3", 4")
☐ -11	Acid resistant epoxy coated body
☐ -12	Galvanized top assembly
☐ -13	Galvanized body
☐ -15	Extension
☐ -16	Square Top
☐ -17	With trap and cleanout
☐ -18	With trap and oil cone and cleanout
☐ -21	Secondary flat stainless steel strainer (2", 3", 4")
☐ -24	Solid secured cover
☐ -28	Stainless steel body (Type 304)
☐ -30	PVC socket connection body
☐ -31	ABS socket connection body
☐ -32	2", 3", 4" integral deep seal trap
☐ -34	Closure plug
☐ -35	Stainless steel mesh over bucket

SUFFIX	OPTIONAL VARIATIONS
☐ -36	Can wash assembly package
☐ -40	Underdeck clamp
☐ -41	Sump receiver
☐ -50	Lacquered cast iron funnel
☐ -90	Threaded side outlet (2", 3", 4")
☐ -90NH	No hub side outlet (2", 3", 4")
☐ -95	Client logo
☐ -BA	Buy American Act compliant product
☐ -C	Membrane clamp
☐ -F4	4" Round funnel
☐ -F6	6" Round funnel
☐ -G	Oval 4" x 9" funnel
☐ -HP	Heel proof grate (1/4" maximum grate opening size, -3 only)
☐ -J	6" x 3" x 1" funnel
☐ (Standard)	No hub outlet
☐ -MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
☐ P	Push on Outlet
☐ -PA	Pennsylvania Steel Act compliant product
☐ T	Threaded outlet (2", 3", 4")
☐ -Y	Non-adjustable top
☐ X	Inside caulk outlet
☐ -Z	Extended wide elastomeric flange

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____