

Location: _____




F1220

**FLOOR DRAIN FOR
NON-MEMBRANE FLOOR AREAS**

Specification: MIFAB® Series F1220 lacquered cast iron floor drain with standard (specify material finish) strainer and vandal resistant allen key screws.

Function: Used in showers, kitchens, restrooms and other non-membrane finished areas. Round, adjustable strainer is used with all types of poured finished floors. Narrow diameter body is ideal for tenant improvement projects where core drilling is required to allow placement of floor drains.

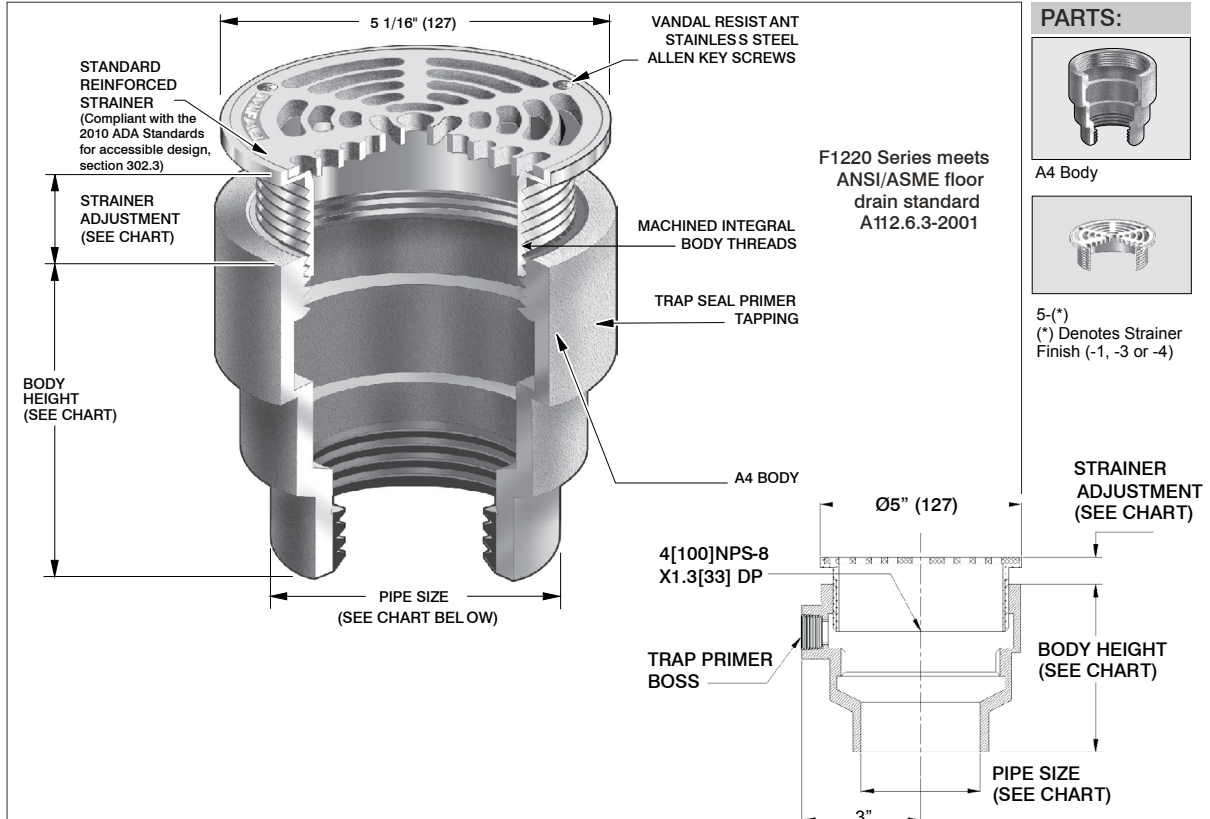

STRAINER DIAMETER	STRAINER ADJUSTMENT MINMAX		ANSI/ASME RATING				PIPE SIZE	BODY HEIGHT		
			FREE AREA	LOAD RATING				NO HUB (STANDARD)	PUSH ON (P)	PVC/ABS (-30)/(-31)
5" (127)	3/4" (19)	2 1/16" (52)	8 in² (5200²)	UP TO	5000-7499	5,000-7,499	2" (51) ○	4" (102) ☐	4 3/8" (111) ☐	4 3/8" (111) ☐
				2,000 LBS.	LBS.		3" (76) ○	4" (102) ☐	4 3/8" (111) ☐	4 3/8" (111) ☐
							4" (102) ○	4" (102) ☐	4 3/8" (111) ☐	4 3/8" (111) ☐

SUFFIX OPTIONAL VARIATIONS

- ☐ -1 Nickel bronze strainer
- ☐ -2 Polished brass strainer (5" only)
- ☐ -3 Stainless steel strainer
- ☐ -4 Ductile iron grate (5" x 8" only)
- ☐ -5 Sediment bucket
- ☐ -6 Security screws (T-20 Torx & pin)
- ☐ -7 1/2" trap seal primer connection
- ☐ -8 Backwater valve (2", 3", 4")
- ☐ -11 Acid resistant epoxy coated body
- ☐ -13 Galvanized body
- ☐ -15 Extension
- ☐ -30 PVC socket connection body
- ☐ -31 ABS socket connection body
- ☐ -34 Closure plug

SUFFIX OPTIONAL VARIATIONS

- ☐ -49 Chrome Plated Strainer
- ☐ -50 Lacquered cast iron funnel
- ☐ -95 Client logo
- ☐ -C1 Clamp ring for low rough-in (min. 1/2" (13))
- ☐ -F4 4" Round funnel
- ☐ -F6 6" Round funnel
- ☐ -G Oval 4" x 9" funnel
- ☐ -HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- ☐ -J 6" x 3" x 1" funnel
- ☐ (Standard) No hub outlet
- ☐ -MG MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
- ☐ P Push on outlet

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____