

Location: _____




F1560

**HEAVY DUTY DRAIN
WITH INTERNAL TRAP**

Specification: MIFAB® Series F1560 extra heavy duty lacquered area drain with side outlet body, internal deep seal trap and cleanout, seepage pan, standard 1" (25) thick, 12" (305) square heavy (specify material finish) hinged grate and suspended sediment bucket.

Function: Used in industrial factories, mechanical rooms, parking garages and other membrane finished areas. 12" square tractor grate is used with all types of poured finished floors. Hinged grate permits easy access to sediment bucket. The anchor flange provides maximum support for drain.

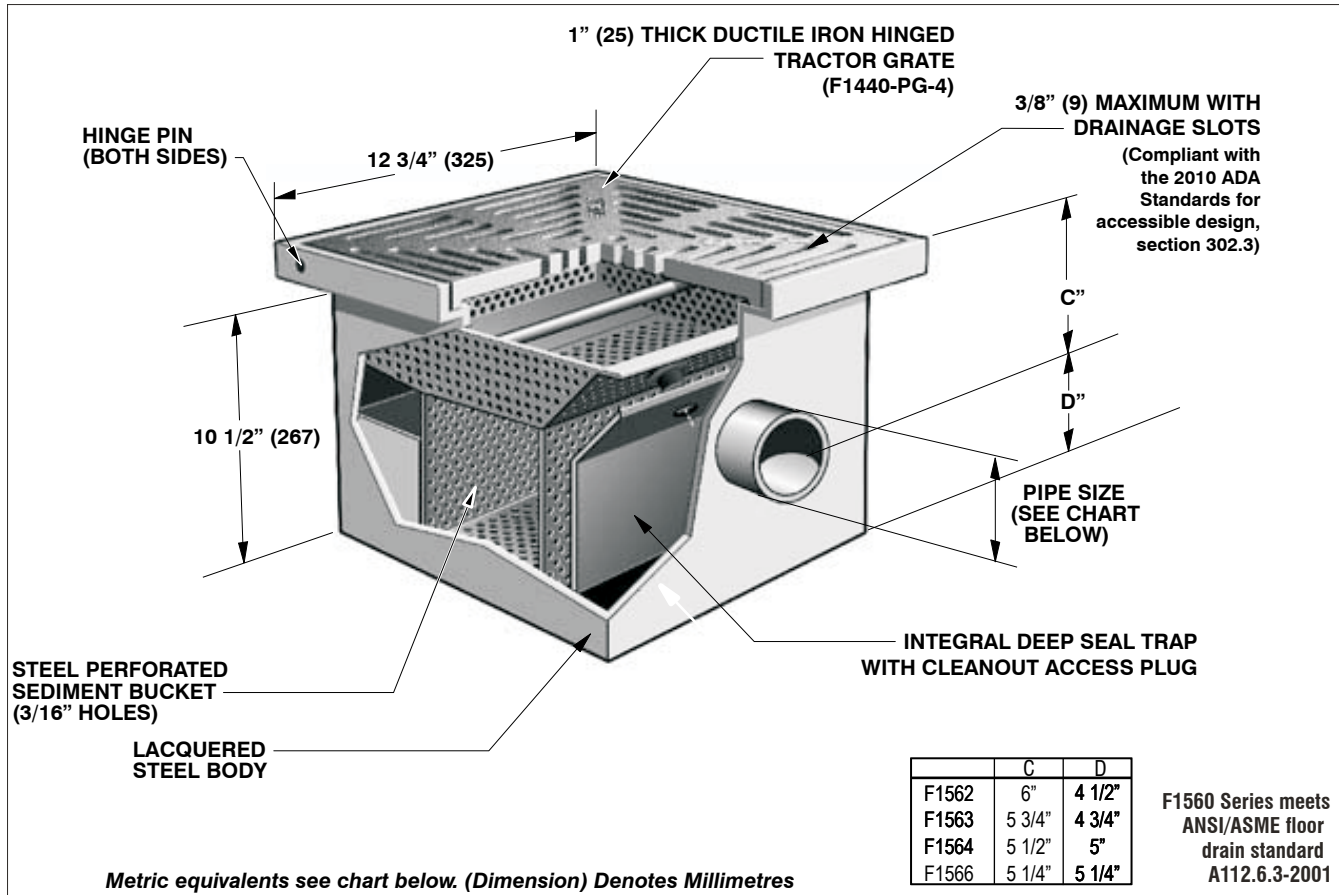

MODEL NO.	WEIGHT LBS.	GRATE SIZE	NO HUB PIPE SIZE	ANSI/ASME RATING	
				FREE AREA	LOAD RATING S.S. (-3), D.I. (-4)
F1562 F1563 F1564 F1566	116	12" x 12" (305 x 305)	2" (51) 3" (76) 4" (102) 6" (152)	51 in ² (32,903 ²)	ANSI/ASME LOAD CLASS "SPECIAL DUTY" (OVER 10,000 LBS.)

SUFFIX OPTIONAL VARIATIONS

-3	Stainless steel strainer (veneer)
-4	Ductile iron strainer
-6	Security screws (T-20 Torx & pin)
-7	1/2" trap seal primer connection
-11	Acid resistant epoxy coated body
-12	Galvanized top assembly
-13	Galvanized body
-28	Stainless steel body and grate (Type 304)

SUFFIX OPTIONAL VARIATIONS

-BA	Buy American Act compliant product
-C	Membrane clamp
-GS	Grounding strap
-HP	Heel proof grate (1/4" maximum grate opening size, -3 only)
(Standard)	No hub outlet
-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
-PA	Pennsylvania Steel Act compliant product
(Specify)	Special outlet size

Job Name: _____

Page No: _____

Section No: _____

Contractor: _____

Schedule No: _____

Purchase Order No: _____