

Location: _____




F1580

**24" X 24" HEAVY DUTY DEEP SUMP
DRAIN WITH BOTTOM OUTLET**

Specification: MIFAB® Series F1580 powder epoxy coated deep sump drain with secondary dome strainer, bottom outlet and extra heavy duty 24" x 24" (610 x 610) two section ductile iron grates with a free area of 200 square inches (129,032²). Grates to have maximum 13/16" (21) openings.

Function: Used in industrial factories, mechanical rooms, parking garages and other membrane finished areas. 24" x 24" tractor grate is used with all types of poured finished floors.

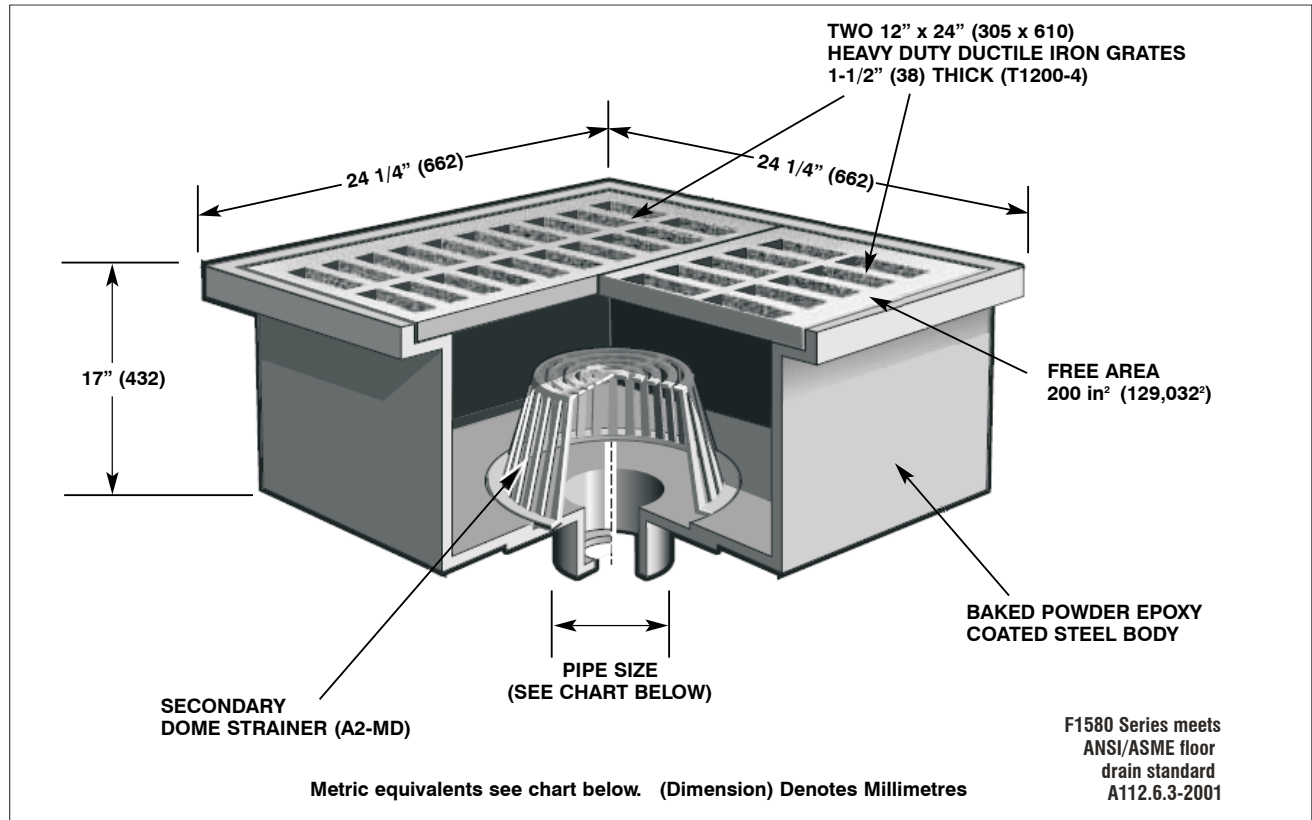

MODEL NO.	NO HUB PIPE SIZE
F1580-A	2" (51)
F1580-B	3" (76)
F1580-C	4" (102)
F1580-D	6" (152)
F1580-E	

SUFFIX	OPTIONAL VARIATIONS
-3	Stainless steel strainer (vener)
-4	Ductile iron strainer
-5	Sediment bucket (F1580-SB)
-6	Security screws (T-20 Torx & pin)
-8	Backwater valve (2", 3", 4")
-12	Galvanized top assembly
-13	Galvanized body
-28	Stainless steel body and grate (Type 304)

SUFFIX	OPTIONAL VARIATIONS
-BA	Buy American Act compliant product
-C	Membrane clamp
-FL	Anchor flange
-FLC	Anchor flange and membrane clamp
-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
-PA	Pennsylvania Steel Act compliant product
(Specify)	Special outlet size

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
Section No: _____ Contractor: _____
Schedule No: _____ Purchase Order No: _____