

Location: _____




FS1730

**12" X 12" 8" FLOOR AREA AND
INDIRECT SANITARY WASTE DRAIN**

Specification: MIFAB Series FS1730, 12" x 12" x 8" deep cast iron floor area and indirect sanitary waste drain complete with white acid resistant porcelain enamel coated interior and loose set grate. Anti-splash aluminum dome strainer included.

Function: Used in kitchens, restaurants, grocery stores, hospitals, schools, and other areas that require a large volume sanitary drain. Also suitable for indirect waste applications. The light duty grate is not recommended for foot traffic.

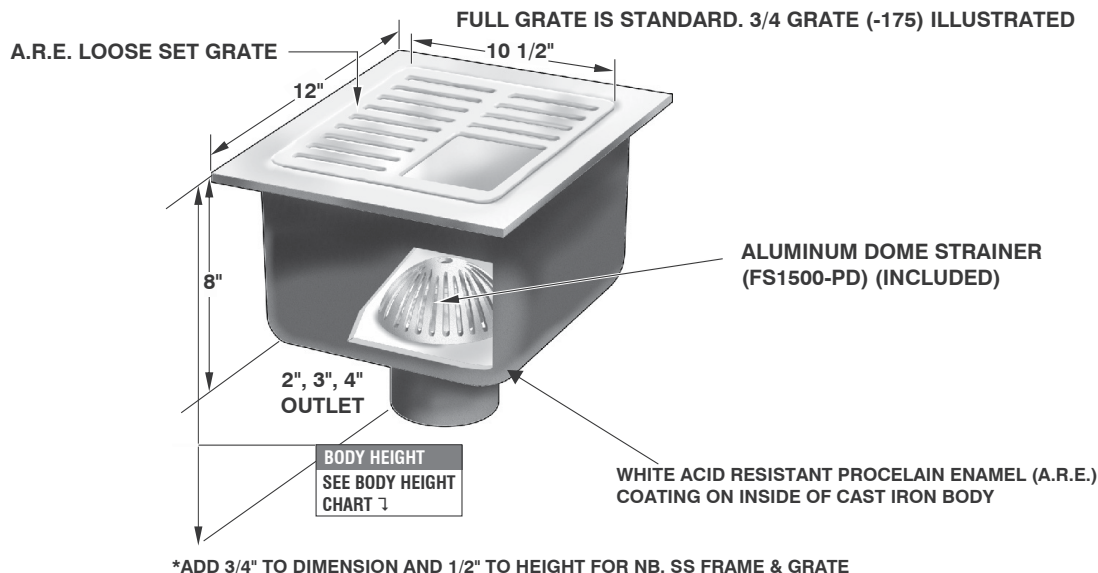

PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	INSIDE CAULK (X)	THREADED (T)	PVC (-30) / ABS (-31)
2" (51)	9 3/4" (248)	9 3/4" (248)	10 5/8" (270)	*10 1/2" (267)	*11 1/4" (286)
3" (76)	9 3/4" (248)	9 3/4" (248)	10 5/8" (270)	*10 7/8" (276)	*11 1/4" (286)
4" (102)	*10 1/2" (267)	9 3/4" (248)	10 5/8" (270)	*10 7/8" (276)	*11 1/4" (286)

*Indicates outlet size and connection available with transition outlet body only.

**4" Inside Caulk Outlet body only available with -FL anchor flange Outlet sizes indicated by the *are available with the transition outlet body only.

Suffix	Description		
-1	Full NB grate and frame	-90	Threaded side outlet
-3	Full SS grate and frame	-90NH	No hub side outlet
-5	Sediment bucket (FS1700-PB)	-95	Client logo (-1, -3 only)
-6	Security screws (H-1039A, 4 pcs) (-1, -3 only)	-150	1/2 grate
-7	Trap seal primer connection	-175	3/4 grate
-8	Backwater Valve (BV1250 Series) (2", 3", 4")	-BA	Buy American Act compliant product
-9	Hinged grate (-3 only)	-PA	Pennsylvania Steel Act compliant product
-21	Secondary flat strainer (FD-9600 Series)	-C	Membrane clamp
-22	Less grate	-F4	4" round funnel
-30	PVC socket connection W/A.R.E. Body (2", 3", 4")	-F6	6" round funnel
-31	ABS socket connection W/A.R.E. body (2", 3", 4")	-G	4" x 9" oval funnel
-32	Deep seal trap (2", 3", 4" no hub) (MI-950 Series)	-J	3" x 1" oval funnel
-50	A.R.E. coated cast iron funnel	P	Push on outlet (2", 3" or 4")
-51	2 1/2" round center hole in grate (-1, -3 only)	(Standard)	No hub outlet
-69	Stainless steel sediment bucket (FS1500-PB-3)	T	Threaded outlet (2", 3" or 4")
-83	Stainless steel mesh screen over sediment bucket (add to S.S. Bucket)	X	Inside caulk outlet (2", 3" or 4")
		-Z	Extended wide elastomeric flange (with -FL only)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____